								F	REVISI	ONS										
LTR					C	DESCRI	IPTIO!	N					DA	ATE (Y	R-MO-D	R-MO-DA) APPROVE			ROVE	D
Ε				and C		device	s. Ad	ded R	adHar	d requ	ireme	nts.	97-10-29				K.A. Cottongim			
F	Tabl	e I; Ch	ange	d the n	nax lim	nit for th Vp-p to	ie outp 175 n	out ripp nVp-p.	ple vol -sld	tage to	est (V _F	RIP)	98-	02-02			K.A.	Cotto	ngim	
SHEET											-									
REV																				
SHEET REV SHEET	US			RE	V		F	F	F	F	F	F	F	F	F	F	F	F		
SHEET REV SHEET REV STAT				RE			F	F 2	F 3	F 4	F 5	F	F 7	F 8	F	F 10	F 11	F 12		
REV SHEET REV SHEET REV STAT OF SHEET	-S			SHI	V EET PARED						5	6 DEFEI	7 NSE S	8 UPPL	9 Y CEI	10	11 COLU	12 JMBUS	8	
SHEET REV SHEET REV STAT OF SHEET PMIC N/A STA	ANDA OCIR	CUI	г	SHI PRE Steve	EET PARED	ncan					5	6 DEFEI	7 NSE S	8 UPPL	9 Y CEI	10	11 COLU	12 JMBUS	6	
SHEET REV SHEET REV STAT DF SHEET PMIC N/A STA MICRO DR	ANDA OCIR	CUI' NG		PRE Steve CHE Gary	PARED	BY BY				4 MICI	5 ROCIF	6 DEFEI	7 NSE S COLUI	8 WPPL MBUS	9 Y CEN	10 NTER 0 432	11 COLU	12 JMBUS		
SHEET REV SHEET REV STAT DF SHEET PMIC N/A STA MICRO DR THIS DRAIL	ANDA OCIR AWIN WING IS A R USE BY PARTMEN BENCIES (CUI'NG VAILABI ALL ITS OF THE	E	SHI PRE Steve CHE Gary	PARED L. Dur CKED I Zahn ROVED ory Lud	BY BY	1 AL DAT	2		4 MICI	5 ROCIF	GEFEI	7 NSE S COLUI	8 WPPL WBUS BRID, L	9 Y CEN	10 NTER 2 432	11 COLU 16-506	12 JMBUS	LE	

DESC FORM 2233


APR 97

<u>DISTRIBUTION STATEMENT A</u>. Approved for public release; distribution is unlimited.

5962-E188-98

🖚 9004708 0034541 TT2 🖿

- 1.1 <u>Scope</u>. This drawing documents five product assurance classes, class D (lowest reliability), class E, (exceptions), class G (lowest high reliability), class H (high reliability), and class K, (highest reliability) and a choice of case outlines and lead finishes are available and are reflected in the Part or Identifying Number (PIN). When available, a choice of radiation hardness assurance levels are reflected in the PIN.
 - 1.2 PIN. The PIN shall be as shown in the following example:

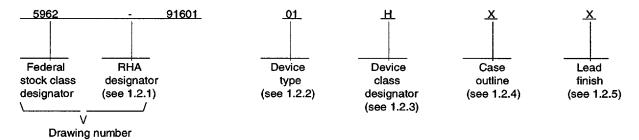

- 1.2.1 <u>Radiation hardness assurance (RHA) designator</u>. Device classes H and K RHA marked devices shall meet the MIL-PRF-38534 specified RHA levels and shall be marked with the appropriate RHA designator. A dash (-) indicates a non-RHA device. Only, the RHA levels specified herein are available.
 - 1.2.2 <u>Device type(s)</u>. The device type(s) shall identify the circuit function as follows:

Device type	Generic number	Circuit function
01	MHF+2815S/883,MHF+2815SF/883	DC-DC converter, 15 W, 15 V output
02	SMHF+2815S,SMHF+2815SF	DC-DC converter, 15 W, 15V output

1.2.3 <u>Device class designator</u>. This device class designator shall be a single letter identifying the product assurance level as follows:

Device class

Device performance documentation

D, E, G, H, or K

Certification and qualification to MIL-PRF-38534

1.2.4 Case outline(s). The case outline(s) shall be as designated in MIL-STD-1835 and as follows:

Outline letter	Descriptive designator	<u>Terminals</u>	Package style
X	See figure 1	8	Dual-in-line
Z	See figure 1	8	Flange package

1.2.5 Lead finish. The lead finish shall be as specified in MIL-PRF-38534.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-91601
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000		REVISION LEVEL F	SHEET 2

DESC FORM 2234 APR 97

9004708 0034542 939 **3**

1.3 Absolute maximum ratings. 1/	
Input voltage range -0.5 V Power dissipation (PD) 6 W Output power 15.45 Lead soldering temperature (10 seconds) +300° Storage temperature range -65° C	w C
1.4 Recommended operating conditions.	
Input voltage range	
2. APPLICABLE DOCUMENTS	
2.1 <u>Government specification, standards, and handbook</u> . The following this drawing to the extent specified herein. Unless otherwise specified, the issue of the Department of Defense Index of Specifications and Standards (solitation.	issues of these documents are those listed in the
SPECIFICATION	
DEPARTMENT OF DEFENSE	
MIL-PRF-38534 - Hybrid Microcircuits, General Specification for.	
STANDARDS	
DEPARTMENT OF DEFENSE	
MIL-STD-883 - Test Methods and Procedures for Microelectronic MIL-STD-973 - Configuration Management. MIL-STD-1835 - Microcircuit Case Outlines.	s.
HANDBOOK	
DEPARTMENT OF DEFENSE	
MIL-HDBK-780 - Standard Microcircuit Drawings.	
(Unless otherwise indicated, copies of the specification, standards, and h Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA	
2.2 Order of precedence. In the event of a conflict between the text of the third drawing takes precedence. Nothing in this document, however, supers specific exemption has been obtained.	is drawing and the references cited herein, the text of edes applicable laws and regulations unless a
1/ Stresses above the absolute maximum rating may cause permanent da maximum levels may degrade performance and affect reliability.	mage to the device. Extended operation at the

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-91601
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000		REVISION LEVEL F	SHEET 3

9004708 0034543 875

3. REQUIREMENTS

- 3.1 Item requirements. The individual item performance requirements for device classes D, E, G, H, and K shall be in accordance with MIL-PRF-38534. Compliance with MIL-PRF-38534 may include the performance of all tests herein or as designated in the device manufacturer's Quality Management (QM) plan or as designated for the applicable device class. Therefore, the tests and inspections herein may not be performed for the applicable device class (see MIL-PRF-38534). Futhermore, the manufacturers may take exceptions or use alternate methods to the tests and inspections herein and not perform them. However, the performance requirements as defined in MIL-PRF-38534 shall be met for the applicable device class.
- 3.2 <u>Design, construction, and physical dimensions</u>. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38534 and herein.
 - 3.2.1 Case outline(s). The case outline(s) shall be in accordance with 1.2.4 herein and figure 1.
 - 3.2.2 Terminal connections. The terminal connections shall be as specified on figure 2.
- 3.3 <u>Electrical performance characteristics</u>. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full specified operating temperature range.
- 3.4 <u>Electrical test requirements</u>. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are defined in table I.
- 3.5 <u>Marking of Device(s)</u>. Marking of device(s) shall be in accordance with MIL-PRF-38534. The device shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's vendor similar PIN may also be marked as listed in QML-38534.
- 3.6 <u>Data</u>. In addition to the general performance requirements of MIL-PRF-38534, the manufacturer of the device described herein shall maintain the electrical test data (variables format) from the initial quality conformance inspection group A lot sample, for each device type listed herein. Also, the data should include a summary of all parameters manually tested, and for those which, if any, are guaranteed. This data shall be maintained under document revision level control by the manufacturer and be made available to the preparing activity (DSCC-VA) upon request.
- 3.7 <u>Certificate of compliance</u>. A certificate of compliance shall be required from a manufacturer in order to supply to this drawing. The certificate of compliance (original copy) submitted to DSCC-VA shall affirm that the manufacturer's product meets the performance requirements of MIL-PRF-38534 and herein.
- 3.8 <u>Certificate of conformance</u>. A certificate of conformance as required in MIL-PRF-38534 shall be provided with each lot of microcircuits delivered to this drawing.

4. QUALITY ASSURANCE PROVISIONS

4.1 <u>Sampling and inspection</u>. Sampling and inspection procedures shall be in accordance with MIL-PRF-38534 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 43216-5000

SIZE A		5962-91601
	REVISION LEVEL F	SHEET 4

DESC FORM 2234 APR 97

9004708 0034544 701

Test Sym		Condition -55°C ≤ T	≤+125°C	Group A subgrou		Lin	nits	Unit
- Arabic British		V _{IN} = 28V do no external s unless otherw	$ync, C_1 = 0,$			Min	Max	
Output voltage	tput voltage +V _{OUT}		V _{IN} = 16, 28, and 40 V dc		01,02	14.85	15.15	V
				2,3	01,02	14.70	15.30	
			L,R	1,2,3	3 02	. 14.1	15.9	
Output current	lout	V _{IN} = 16, 28, and	40 V dc	1,2,3	3 01,02		1000	mA
			L,R	1,2,3	3 02		1000	
Output ripple	V _{RIP}	I _{OUT} = 1.0 A, B.W. = 10 kHz to	2/	1	01		80	mV p-p
voltage		B.W. = 10 KHZ to	ZIVITIZ		02		175	
				2,3	01		120	
					02		260	
			L,R	1,2,3	3 02		520	
Line regulation	VRLINE	V _{IN} = 16 and 40 V dc		1,2,3	3 01		50	mV
					02		100	_
			L,R	1,2,	3 02		200	
Load regulation	VR _{LOAD}	I _{OUT} = 0 to 1.0 A		1,2,3	3 01,02		50	mV
			L,R	1,2,3	3 02		100	-
nput current	I _{IN}	I _{OUT} = 0, inhibit p	pin (pin 1) = 0	1,2,3	01,02		12	mA
			L,R		02		15	
		I _{OUT} = 0, inhibit popen	pin (pin 1) =		01,02		62	
			L,R		02		100	
Input ripple current	I _{RIP}	I _{OUT} = 1.0 A, B. W. = 10 kHz to	40.141.	1	01,02		80	mA p-p
		B. W. = 10 kHz to 10 MHz		2,3	01,02		120	
			L,R	1,2,	3 02		[^] 150	
Efficiency	Eff	I _{OUT} = 1.0 A		1	01,02	78		%
				2,3	01,02	74		
			L,R	1,2,	3 02	70		
See footnotes at end	of table.							
	STANDA			SIZE A			594	 62-9160
MAC	ROCIRCUIT	DD AMAIN O	j	~	l		, 550	0.00

9004708 0034545 648

Isolation	I	Conditior -55°C ≤ T _C V _{IN} = 28V dc :		Group A subgroups	Device Type	Lir	nits	Unit
Isolation		no external sync, C _L = 0, unless otherwise specified				Min	Мах	
	ISO	Input to output or a (except pin 6) at 50		1	01,02	100		МΩ
		L,R			02	100		
Capacitive load	CL	No effect on dc pe	rformance	4	01,02		100	μf
3/4/	_		L,R	4	02		100	
Internal power	PD	Short circuit		1,2,3	01		6	w
dissipation, short circuit					02		8]
			L,R		02		9.5	
Switching	F _S	I _{OUT} = 1.0 A		4	01,02	500	600	kHz
frequency				5,6	01,02	480	620	
			L,R	4,5,6	02	400	700	
External sync 5/		I _{OUT} = 1.0 A, TTL	level to pin 5	4,5,6	01,02	500	600	kHz
range			L,R		02	500	600	
Output response to	VO _{TLOAD}		•	4,5,6	01	-600	+600	mV pk
step transient load changes <u>6</u> /					02	-800	+800	
			L,R		02	-1200	+1200	
Recovery time, step transient	TT _{LOAD}	50 percent load to percent load	from 100	4,5,6	01,02		1.2	ms
load changes <u>6</u> / <u>7</u> /			L,R		02		2.4	
Output response to transient step line changes	VOTLINE	Input step from 16 IOUT = 1.0 A	V to 40 V dc,	4,5,6	01,02	-800	+800	mV pk
4/8/			L,R		02	-1500	+1500	
,		Input step from 40 IOUT = 1.0 A	V to 16 V dc,		01,02	-800	+800	
	l)		L,R	Į.	02	-1500	+1500	


■ 9004708 0034546 584 ■

	TABLE	I. Electrical pe	rformance cha	racteristics - Co	ontinued.			
Test	-55°C ≤ 1		ons <u>1</u> / C_≤+125°C	Group A subgroups	Device Type	Limits		Unit
		V _{IN} = 28V dc no external sy unless otherw				Min	Max	
Recovery time to transient step line	TTLINE	Input step from V dc, IOUT =		4,5,6	01,02		1.2	ms
changes 4/7/			L,R		02		2.4	
		Input step from			01,02		1.2	
			L,R		02		2.4	
Turn-on overshoot 4/	VtonOS	I _{OUT} = 1.0 A		4,5,6	01,02		1500	mV pk
			L,R	4,5,6	02		2000	
Turn-on delay 9/	TonD	I _{OUT} = 1.0 A	l _{OUT} = 1.0 A		01,02		25	ms
			L,R		02		100	
Load fault recovery	Tr _{LF}	I _{OUT} = 1.0 A		4,5,6	01,02		30	ms
<u>4</u> /			L,R	4,5,6	02		100	

- 1/ Post irradiation testing shall be in accordance with 4.3.5. herein.
- 2/ Bandwidth guaranteed by design. Tested for 10 kHz to 2 MHz.
- 3/ Capacitive load may be any value from 0 to the maximum limit without compromising dc performance.
- 4/ Parameter shall be tested as part of design characterization and after design or process changes. Therefore, the parameter shall be guaranteed to the limits specified in table I.
- 5/ A TTL level waveform (V_{IH} = 4.5 V minimum, V_{IL} = .8 V maximum) with a 50 percent ±10 percent duty cycle applied to the sync input pin (pin 5) within the sync range frequency shall cause the converters switching frequency to become synchronous with the frequency applied to the sync input pin (pin 5).
- 6/ Load step transition time is 10 microseconds minimum.
- Z' Recovery time is measured from the initiation of the transient to where V_{OUT} has returned to within ± 1 percent of V_{OUT} final value.
- 8/ Input step transition time greater than 10 microseconds.
- 9/ Turn-on delay time measurement is for either a step application of power at the input or the removal of a ground signal from the inhibit pin (pin 1) while power is applied to the input.

STANDARD MICROCIRCUIT DRAWING	SIZE		5962-91601
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000		REVISION LEVEL F	SHEET 7

9004708 0034547 410

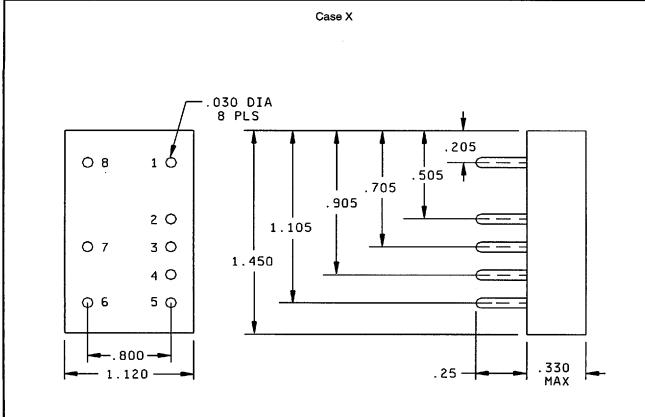

Inches	mm
.030	0.76
.205	5.21
.25	6.4
.330	8.38
.505	12.83
.705	17.91
.800	20.32
.905	22.99
1.105	28.07
1.120	28.45
1.450	36.83

NOTES:


- 1. Dimensions are in inches.
- 2. Metric equivalents are given for general information only.
- 3. Unless otherwise specified, tolerance is $\pm .01$ for two place decimals and $\pm .005$ for three place decimals.
- 4. Device weight: 30 grams maximum.

FIGURE 1. Case outline.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-91601
DEFENSE SUPPLY CENTER COLUMBUS		REVISION LEVEL	SHEET
COLUMBUS, OHIO 43216-5000		F	8

DESC FORM 2234 APR 97

9004708 0034548 357

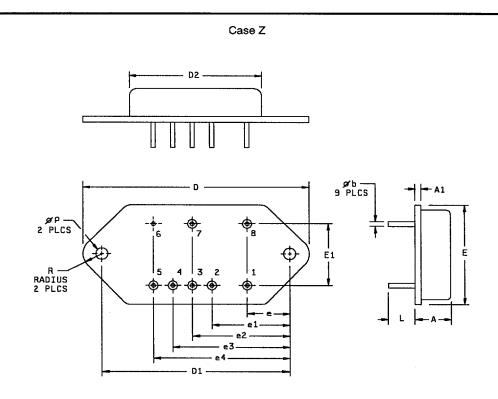

Symbol	Millimete	rs	Inches	
	Min	Max	Min	Max
Α		8.38		.330
A1	.94	1.45	.037	.057
φb	.64	.89	.025	.035
D		50.80		2.000
D1	43.82	44.07	1.725	1.735
D2		36.83		1.450
е	8.64	8.89	.340	.350
e1	16.26	16.51	.640	.650
e2	21.37	21.59	.840	.850
e3	26.41	26.67	1.040	1.050
e4	31.50	31.75	1,240	1.250
E		28.70		1.130
E1	20.07	20.57	.790	.810
L	6.10	6.60	.240	.260
фр	3.20	3.30	.126	.130
R	3.18	3.43	.125	.135

- Notes:
 1. The case outline Z was originally designed using inch-pound units of measurement, in the event of conflict between the metric and inch-pound units, the inch-pound shall take precedence.
 2. Device weight: 30 grams maximum

FIGURE 1. Case outline - Continued

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-91601
DEFENSE SUPPLY CENTER COLUMBUS		REVISION LEVEL	SHEET
COLUMBUS, OHIO 43216-5000		F	9

9004708 0034549 293 🚥

Device types	01 and 02
Case outlines	X and Z
Terminal number	Terminal symbol
1	Inhibit
2	No connection
3	Output return
4	Output
5	Sync input
6	Case ground
7	Input return
8	Input

FIGURE 2. Terminal connections.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-91601
DEFENSE SUPPLY CENTER COLUMBUS		REVISION LEVEL	SHEET
COLUMBUS, OHIO 43216-5000		F	10

■ 9004708 0034550 TO5 ■

TABLE II. Electrical test requirements.

MIL-PRF-38534 test requirements	Subgroups (in accordance with MIL-PRF-38534, group A test table)
Interim electrical parameters	
Final electrical parameters	1*, 2, 3, 4, 5, 6
Group A test requirements	1, 2, 3, 4, 5, 6
Group C end-point electrical parameters	1
Post irradiation end-point electrical parameters for RHA devices	1, 2, 3, 4 ,5, 6

^{*} PDA applies to subgroup 1.

- 4.2 Screening. Screening shall be in accordance with MIL-PRF-38534. The following additional criteria shall apply:
 - Burn-in test, method 1015 of MIL-STD-883.
 - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to either DSCC-VA or the acquiring activity upon request. Also, the test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015 of MIL-STD-883.
 - (2) T_C as specified in accordance with table I of method 1015 of MIL-STD-883.
 - b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.
- 4.3 Conformance and periodic inspections. Conformance inspection (CI) and periodic inspection (PI) shall be in accordance with MIL-PRF-38534 and as specified herein.
- 4.3.1 Group A inspection (CI). Group A inspection shall be in accordance with MIL-PRF-38534 and as follows:
 - a. Tests shall be as specified in table II herein.
 - b. Subgroups 7, 8, 9, 10, and 11 shall be omitted.
- 4.3.2 Group B inspection (PI). Group B inspection shall be in accordance with MIL-PRF-38534.
- 4.3.3 Group C inspection (PI). Group C inspection shall be in accordance with MIL-PRF-38534 and as follows:
 - a. End-point electrical parameters shall be as specified in table II herein.
 - Steady-state life test, method 1005 of MIL-STD-883.
 - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to either DSCC-VA or the acquiring activity upon request. Also, the test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.
 - (2) T_C as specified in accordance with table I of method 1005 of MIL-STD-883.
 - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-91601
DEFENSE SUPPLY CENTER COLUMBUS		REVISION LEVEL	SHEET
COLUMBUS, OHIO 43216-5000		F	11

9004708 0034551 941 📟

- 4.3.4 Group D inspection (PI). Group D inspection shall be in accordance with MIL-PRF-38534.
- 4.3.5 <u>Hadiation Hardness Assurance (RHA)</u>. RHA qualification is required only for those devices with the RHA designator as specified herein.

	RHA level L	RHA level R	Units
Total ionizing dose tolerance level	50	100	kRad(Si)
Single event upset survival level (LET)	No guarantee	40	MeV

- a. The manufacturer shall perform a worst-case and radiation susceptibility analysis on the device. This analysis shall show that the minimum performance requirements of each component has adequate design margin under worst-case operating conditions (extremes of line voltage, temperatures, load, frequency, radiation environment, etc). This analysis guarantees the post-irradiation parameter limits specified in table I.
- b. RHA testing shall be performed at the component level for initial device qualification, and after design changes that may affect the RHA performance of the device. As an alternative to testing, components may be procured to manufacturer radiation guarantees that meet the minimum performance requirements. Component radiation performance guarantees shall be established in compliance with MIL-PRF-19500, Group D or MIL-PRF-38535, Group E, as applicable. For components with less than adequate performance margin, component lot radiation acceptance screening shall be performed.
- c. The manufacturer shall establish procedures controlling component radiation testing, and shall establish radiation test plans used to implement component lot qualification during procurement. Test plans and test reports shall be filed and controlled in accordance with the manufacturer's configuration management system.
- d. The device manufacturer shall designate a RHA program manager to oversee component lot qualification, and to monitor design changes for continued compliance to RHA requirements.
- 5. PACKAGING
- 5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38534.
- 6. NOTES
- 6.1 <u>Intended use</u>. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.
- 6.2 <u>Replaceability</u>. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.
- 6.3 <u>Configuration control of SMD's</u>. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished in accordance with MIL-STD-973 using DD Form 1692, Engineering Change Proposal.
- 6.4 Record of users. Military and industrial users shall inform Defense Supply Center Columbus when a system application requires configuration control and the applicable SMD. DSCC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronic devices (FSC 5962) should contact DSCC-VA, telephone (614) 692-7603.
- 6.5 <u>Comments</u>. Comments on this drawing should be directed to DSCC-VA, Columbus, Ohio 43216-5000, or telephone (614) 692-0512.
- 6.6 <u>Sources of supply</u>. Sources of supply are listed in QML-38534. The vendors listed in QML-38534 have submitted a certificate of compliance (see 3.7 herein) to DSCC-VA and have agreed to this drawing.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-91601
DEFENSE SUPPLY CENTER COLUMBUS		REVISION LEVEL	SHEET
COLUMBUS, OHIO 43216-5000		F	12

9004708 0034552 888

STANDARD MICROCIRCUIT DRAWING SOURCE APPROVAL BULLETIN

DATE: 98-02-02

Approved sources of supply for SMD 5962-91601 are listed below for immediate acquisition only and shall be added to QML-38534 during the next revision. QML-38534 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DSCC-VA. This bulletin is superseded by the next dated revision of QML-38534.

Standard	Vendor	Vendor
microcircuit drawing	CAGE	similar
PIN 1/	number	PIN 2/
5962-9160101HXA	50821	MHF+2815S/883
5962-9160101HXC	50821	MHF+2815S/883
5962-9160101HZA	50821	MHF+2815SF/883
5962-9160101HZC	50821	MHF+2815SF/883
5962-9160102HXA	50821	SMHF+2815S/HO
5962-9160102HXC	50821	SMHF+2815S/HO
5962-9160102HZA	50821	SMHF+2815SF/HO
5962-9160102HZC	50821	SMHF+2815SF/HO
5962L9160102HXA	50821	SMHF+2815S/HL
5962L9160102HXC	50821	SMHF+2815S/HL
5962L9160102HZA	50821	SMHF+2815SF/HL
5962L9160102HZC	50821	SMHF+2815SF/HL
5962R9160102HXA	50821	SMHF+2815S/HR
5962R9160102HXC	50821	SMHF+2815S/HR
5962R9160102HZA	50821	SMHF+2815SF/HR
5962R9160102HZC	50821	SMHF+2815SF/HR
5962L9160102KXA	50821	SMHF+2815S/KL
5962L9160102KXC	50821	SMHF+2815S/KL
5962L9160102KZA	50821	SMHF+2815SF/KL
5962L9160102KZC	50821	SMHF+2815SF/KL
5962R9160102KXA	50821	SMHF+2815S/KR
5962R9160102KXC	59821	SMHF+2815S/KR
5962R9160102KZA	50821	SMHF+2815SF/KR
5962R9160102KZC	50821	SMHF+2815SF/KR

^{1/} The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the vendor to determine its availability.

availability.
2/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE <u>number</u>

50821

Vendor name and address

Interpoint Corporation 10301 Willows Road Redmond, WA 98052

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in this information bulletin.

9004708 0034553 714