

# D77 Series - 53 mm


Basic Dimensions	Fractional Dimensions	Decimal Dimensions
UP TO 1/4	$\pm 1/128$	$\pm .003$
OVER 1/4 TO 8	$\pm 1/64$	$\pm .005$
OVER 8	$\pm 1/32$	$\pm .010$
Angles: $\pm 2 1/2$		

Dimensional Tolerances Unless Otherwise Specified May Vary


Dimensions Are In Inches

## D7780 SERIES VARISTOR

STYLE NUMBER	S	T MAX
D7780ZOV131RA490	.100	.248
D7780ZOV141RA530	.110	.252
D7780ZOV151RA570	.110	.257
D7780ZOV181RA630	.110	.267
D7780ZOV231RA730	.130	.280
D7780ZOV251RA800	.140	.287
D7780ZOV271RA860	.140	.294
D7780ZOV301RA940	.150	.305
D7780ZOV321RA1000	.150	.312
D7780ZOV391RA1200	.170	.312
D7780ZOV421RA1500	.180	.332
D7780ZOV461RA1200	.190	.344
D7780ZOV481RA1250	.190	.350
D7780ZOV511RA1400	.200	.360
D7780ZOV551RA1500	.220	.373
D7780ZOV581RA1580	.220	.382
D7780ZOV621RA1750	.230	.395
D7780ZOV681RA1800	.250	.414
D7780ZOV751RA2000	.280	.460
D7780ZOV881RA2500	.320	.476
D7780ZOV102RA3000	.370	.514

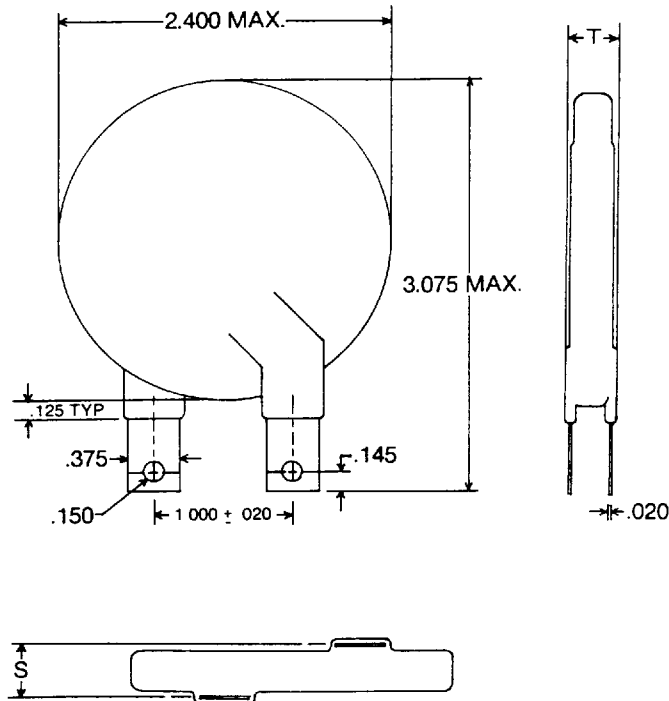


Left-Hand Lead




Add Prefix "L"  
To Part Number  
i.e. L-D7780ZOV131RA490

## D7777 SERIES FORMED FOOT VARISTOR

STYLE NUMBER	S	T MAX
D7777ZOV131RA490	.384	.248
D7777ZOV141RA530	.380	.252
D7777ZOV151RA570	.376	.257
D7777ZOV181RA630	.371	.267
D7777ZOV231RA730	.355	.280
D7777ZOV251RA800	.349	.287
D7777ZOV271RA860	.342	.294
D7777ZOV301RA940	.335	.305
D7777ZOV321RA1000	.331	.312
D7777ZOV391RA1200	.317	.312
D7777ZOV421RA1500	.307	.332
D7777ZOV461RA1200	.295	.344
D7777ZOV481RA1250	.290	.350
D7777ZOV511RA1400	.283	.360
D7777ZOV551RA1500	.268	.373
D7777ZOV581RA1580	.260	.382
D7777ZOV621RA1750	.253	.395
D7777ZOV681RA1800	.237	.414
D7777ZOV751RA2000	.210	.460
D7777ZOV881RA2500	.165	.476
D7777ZOV102RA3000	.120	.514

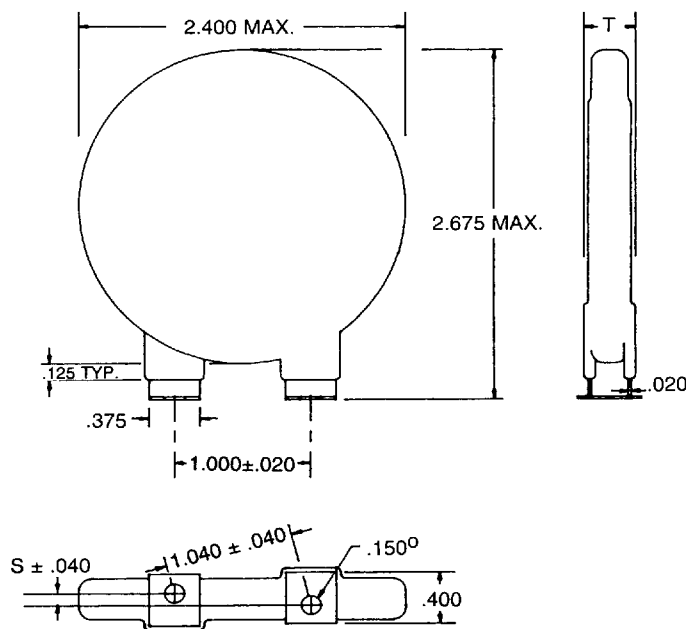

Left-Hand Lead



Add Prefix "L"  
To Part Number  
i.e. L-D7777ZOV131RA490

5728343 0000524 1T4

6