

November 2011 UniFET-II<sup>M</sup>

# FDD5N50NZ

# N-Channel MOSFET 500V, 4A, $1.5\Omega$

#### **Features**


- $R_{DS(on)}$  = 1.38 $\Omega$  ( Typ.)@  $V_{GS}$  = 10V,  $I_D$  = 2A
- Low Gate Charge (Typ. 9nC)
- Low C<sub>rss</sub> (Typ. 4pF)
- · Fast Switching
- · 100% Avalanche Tested
- · Improved dv/dt Capability
- · ESD Imoroved Capability
- · RoHS Compliant




## **Description**

These N-Channel enhancement mode power field effect transistors are produced using Fairchild's proprietary, planar stripe, DMOS technology.

This advance technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficient switching mode power supplies and active power factor correction.





# MOSFET Maximum Ratings T<sub>C</sub> = 25°C unless otherwise noted\*

Symbol		Parameter		FDD5N50NZ	Units	
V <sub>DSS</sub>	Drain to Source Voltage	Drain to Source Voltage				
V <sub>GSS</sub>	Gate to Source Voltage	Gate to Source Voltage				
1	Drain Current	-Continuous (T <sub>C</sub> = 25°C)		4	Λ.	
ID	Diam Current	-Continuous (T <sub>C</sub> = 100°C)	-Continuous (T <sub>C</sub> = 100°C)		A	
I <sub>DM</sub>	Drain Current	- Pulsed	(Note 1)	16	Α	
E <sub>AS</sub>	Single Pulsed Avalanche Energy			304	mJ	
I <sub>AR</sub>	Avalanche Current	Avalanche Current			Α	
E <sub>AR</sub>	Repetitive Avalanche Energy		(Note 1)	6.2	mJ	
dv/dt	Peak Diode Recovery dv/dt		(Note 3)	10	V/ns	
D	Dower Discipation	(T <sub>C</sub> = 25°C)		62	W	
$P_{D}$	Power Dissipation	- Derate above 25°C		0.5	W/°C	
T <sub>J</sub> , T <sub>STG</sub>	Operating and Storage Temperature Range			-55 to +150	°C	
T <sub>L</sub>	Maximum Lead Temperature for Soldering Purpose, 1/8" from Case for 5 Seconds			300	°C	

<sup>\*</sup>Drain current limited by maximum junction temperature

#### **Thermal Characteristics**

Symbol	Parameter	FDD5N50NZ	Units
$R_{\theta JC}$	Thermal Resistance, Junction to Case	2.0	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	90	- C/VV

# **Package Marking and Ordering Information**

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
FDD5N50NZ	FDD5N50NZTM	D-PAK	380mm	16mm	2500

# **Electrical Characteristics** $T_C = 25^{\circ}C$ unless otherwise noted

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Units
Off Charac	cteristics					
BV <sub>DSS</sub>	Drain to Source Breakdown Voltage	$I_D = 250 \mu A$ , $V_{GS} = 0V$ , $T_J = 25^{\circ}C$	500	-	-	V
$\frac{\Delta BV_{DSS}}{\Delta T_J}$	Breakdown Voltage Temperature Coefficient	I <sub>D</sub> = 250μA, Referenced to 25°C	-	0.5	-	V/°C
1	Zero Gate Voltage Drain Current	$V_{DS} = 500V, V_{GS} = 0V$	-	-	1	μА
IDSS	Zelo Gale Vollage Dialii Cultelli	$V_{DS} = 400V, T_{C} = 125^{\circ}C$	-	-	10	μΑ
I <sub>GSS</sub>	Gate to Body Leakage Current	$V_{GS} = \pm 25V, V_{DS} = 0V$	-	-	±10	μΑ

#### **On Characteristics**

V <sub>GS(th)</sub>	Gate Threshold Voltage	$V_{GS} = V_{DS}, I_{D} = 250 \mu A$	3.0	-	5.0	V
R <sub>DS(on)</sub>	Static Drain to Source On Resistance	$V_{GS} = 10V, I_D = 2A$	-	1.38	1.5	Ω
9 <sub>FS</sub>	Forward Transconductance	$V_{DS} = 20V, I_D = 2A$ (Note 4)	-	3.54	-	S

## **Dynamic Characteristics**

C <sub>iss</sub>	Input Capacitance	V 05V V 0V	-	330	440	pF
Coss	Output Capacitance	$V_{DS} = 25V, V_{GS} = 0V$ f = 1MHz		50	70	pF
C <sub>rss</sub>	Reverse Transfer Capacitance	1 - 1101112	-	4	6	pF
Q <sub>g(tot)</sub>	Total Gate Charge at 10V		-	9	12	nC
Q <sub>gs</sub>	Gate to Source Gate Charge	$V_{DS} = 400 V I_{D} = 4 A$	-	2	-	nC
Q <sub>gd</sub>	Gate to Drain "Miller" Charge	V <sub>GS</sub> = 10V (Note 4, 5)	-	4	-	nC

### **Switching Characteristics**

t <sub>d(on)</sub>	Turn-On Delay Time			-	12	35	ns
t <sub>r</sub>	Turn-On Rise Time	$V_{DD} = 250V, I_{D} = 4A$		-	22	55	ns
t <sub>d(off)</sub>	Turn-Off Delay Time	$V_{GS}$ = 10V, $R_G$ = 25 $\Omega$		-	28	65	ns
t <sub>f</sub>	Turn-Off Fall Time		(Note 4, 5)	-	21	50	ns

#### **Drain-Source Diode Characteristics**

Is	Maximum Continuous Drain to Source Diode Forward Current			-	-	4	Α
I <sub>SM</sub>	Maximum Pulsed Drain to Source Diode Forward Current		-	-	16	Α	
$V_{SD}$	Drain to Source Diode Forward Voltage	V <sub>GS</sub> = 0V, I <sub>SD</sub> = 4A		-	-	1.4	V
t <sub>rr</sub>	Reverse Recovery Time	V <sub>GS</sub> = 0V, I <sub>SD</sub> = 4A		-	210	-	ns
Q <sub>rr</sub>	Reverse Recovery Charge $dI_F/dt = 100A/\mu s$ (Note 4)		-	1.1	-	μС	

#### Notes:

- ${\it 1. Repetitive \ Rating: Pulse \ width \ limited \ by \ maximum \ junction \ temperature}$
- 2. L = 38mH, I<sub>AS</sub> = 4A, V<sub>DD</sub> = 50V, R<sub>G</sub> = 25 $\Omega$ , Starting T<sub>J</sub> = 25 $^{\circ}$ C
- 3.  $I_{SD} \le 4A$ , di/dt  $\le 200A/\mu s$ ,  $V_{DD} \le BV_{DSS}$ , Starting  $T_J$  = 25°C
- 4. Pulse Test: Pulse width  $\leq 300 \mu s$ , Dual Cycle  $\leq 2\%$
- 5. Essentially Independent of Operating Temperature Typical Characteristics

# **Typical Performance Characteristics**

Figure 1. On-Region Characteristics




Figure 3. On-Resistance Variation vs.
Drain Current and Gate Voltage




Figure 5. Capacitance Characteristics




Figure 2. Transfer Characteristics




Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature





Figure 6. Gate Charge Characteristics



# **Typical Performance Characteristics** (Continued)

Figure 7. Breakdown Voltage Variation vs. Temperature




Figure 8. On-Resistance Variation vs. Temperature




Figure 9. Maximum Safe Operating Area vs. Case Temperature




Figure 10. Maximum Drain Current







Figure 11. Transient Thermal Response Curve

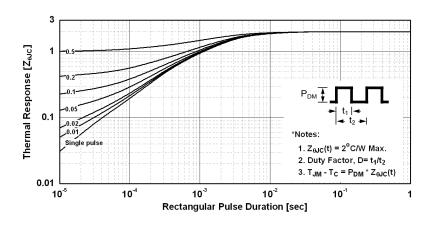


### **Gate Charge Test Circuit & Waveform**

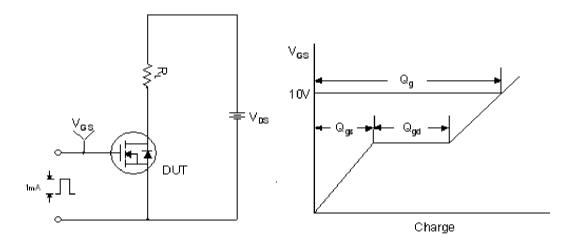


#### **Resistive Switching Test Circuit & Waveforms**

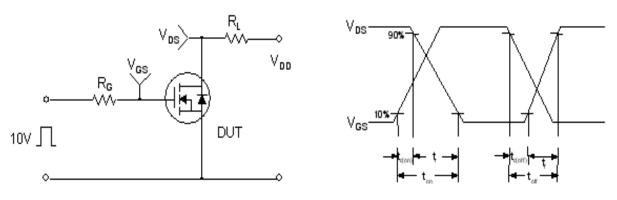



#### **Unclamped Inductive Switching Test Circuit & Waveforms**

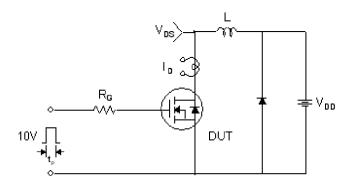




#### Peak Diode Recovery dv/dt Test Circuit & Waveforms

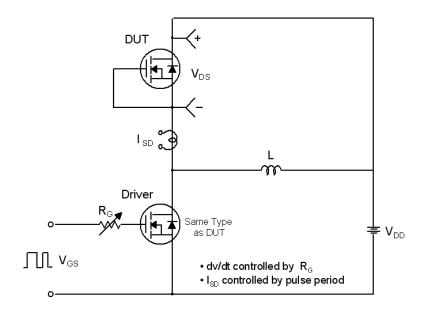


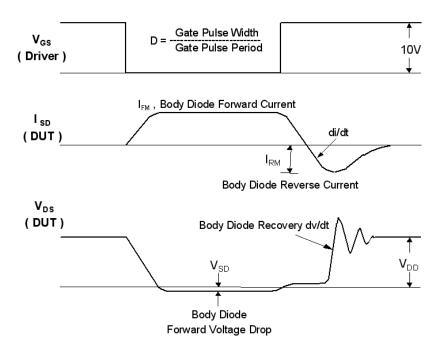


#### **Mechanical Dimensions**


# **D-PAK**











- NOTES: UNILESS OTHERWISE SPECIFIED

  A) THIS PACKAGE CONFORMS TO JEDEC, TOJES, ISSUE C, VARIATION AN.

  B) ALL DINENSIONS ARE IN MILLIMETERS.
  C) DINENSIONING AND TOLERANCING PER ASME 114.5M-1984.

  D) HEAT SINK TOP EDGE COULD BE IN CHAMFERED CORNERS OR EDGE FROTRUSION.

  E) PRESENCE OF TRIMMED CENTER LEAD IS COTIONAL.

  F) DIMENSIONS ARE EXCLUSIVE OF BURSS, WOLD FLASH AND THE BAR EXTRUSIONS.

  O) LAND PATTERN RECOMENDATION IS BASED ON IPC7351A STD TOZZOF1003X295-3N.

  H) DRAWING NUMBER AND REVISION: WKT-TOZSZA03REVB

Dimensions in Millimeters





#### **TRADEMARKS**

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™ Auto-SPM™ AX-CAP™\* BitSiC® Build it Now™ CorePLUS™ CorePOWER™

CROSSVOLT<sup>TM</sup> Current Transfer Logic™ DEUXPEED® Dual Cool™ EcoSPARK<sup>®</sup> EfficentMax™ ESBC™

Fairchild<sup>®</sup> Fairchild Semiconductor® FACT Quiet Series™ FACT

FAST® FastvCore™ FETBench™

FlashWriter® \* FPS™ F-PFS™ FRFET®

Global Power Resource<sup>SM</sup> Green FPS™ Green FPS™ e-Series™

Gmax™ GTO™ IntelliMAX™ ISOPLANAR™ MegaBuck™ MICROCOUPLER™

MicroFET™ MicroPak™ MicroPak2™ MillerDrive™ MotionMax™ Motion-SPM™ mWSaver™ OptiHiT™ OPTOLOGIC® OPTOPLANAR® PDP SPM™ Power-SPM™ PowerTrench® PowerXS™ Programmable Active Droop™

QS<sup>TM</sup> Quiet Series™ RapidConfigure™

Saving our world, 1mW/W/kW at a time™ SignalWise™

SmartMax™ SMART START™ SPM<sup>®</sup> STEALTH™ SuperFET® SuperSOT™-3 SuperSOT™-6 SuperSOT™-8 SupreMOS® SyncFET™ Sync-Lock™

SYSTEM ®\*

The Power Franchise® The Right Technology for Your Success™

TinyBoost™ TinyBuck™ TinyCalc™ TinyLogic<sup>®</sup> TIŃYOPTO™ TinyPower™ TinyPWM™ TinyWire™ TranSiC® TriFault Detect™

wer

TRUECURRENT®\* μSerDes™

**UHC** Ultra FRFET™ UniFET™ VCX™ VisualMax™ XS™

\*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

**LIFE SUPPORT POLICY**FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty issues that may arise is a supplication of the provide any warranty issues that may arise. Fairchild will not provide any warranty issues that may arise. Fairchild will not provide any warranty issues that may arise. Fairchild will not provide any warranty issues that may arise. Fairchild will not provide any warranty issues that may arise is a supplication of the provide any warranty is a supplication of the provide any warranty is a supplication of the provide any warranty is a supplication of the provide any warranty

#### PRODUCT STATUS DEFINITIONS **Definition of Terms**

П	Datasheet Identification Product Status		Definition
	Advance Information Formative / In Design		Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
	Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
	No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
	Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. 155