

# SD101AWS - SD101CWS

### SURFACE MOUNT SCHOTTKY BARRIER DIODE

#### Features

- Low Forward Voltage Drop
- Guard Ring Construction for
- Transient ProtectionNegligible Reverse Recovery Time
- Low Capacitance
- Ultra-small Surface Mount Package


#### **Mechanical Data**

- Case: SOD-323, Plastic
- Case material UL Flammability Rating Classification 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Polarity: Cathode Band
- Leads: Solderable per MIL-STD-202, Method 208
- Marking: See Sheet 3
- SD101AWS Marking Code: S1 or SK
- SD101BWS Marking Code: S2 or SK
- SD101CWS Marking Code: S3 or SC or SK
- Weight: 0.004 grams (approx.)

#### **Maximum Ratings** @ T<sub>A</sub> = 25°C unless otherwise specified

Characteristic		Symbol	SD101AWS	SD101BWS	SD101CWS	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	60	50	40	v
RMS Reverse Voltage		V <sub>R(RMS)</sub>	42	35	28	V
Forward Continuous Current (Note 1)		I <sub>FM</sub>		15		mA
Non-Repetitive Peak Forward Surge Current	@ t ≤ 1.0s @ t = 10μs	I <sub>FSM</sub>	50 2.0			mA A
Power Dissipation (Note 1)		Pd		200		mW
Thermal Resistance, Junction to Ambient Air (Note 1)		R <sub>0JA</sub>	625			°C/W
Operating and Storage Temperature Range		Tj, T <sub>STG</sub>	-65 to +125			°C

Note: 1. Part mounted on FR-4 PC board with recommended pad layout, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.




SOD-323				
Dim	Min	Max		
A	2.30	2.70		
В	1.60	1.80		
С	1.20	1.40		
D	1.05 Typical			
E	0.25	0.35		
G	0.20	0.40		
Н	0.10 0.15			
J	0.05 Typical			
α	<b>0</b> °	8°		
All Dimensions in mm				


Characteristic		Symbol	Min	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 2)	SD101AWS SD101BWS SD101CWS	V <sub>(BR)R</sub>	60 50 40	_	v	$I_{R} = 10\mu A$ $I_{R} = 10\mu A$ $I_{R} = 10\mu A$
Forward Voltage Drop (Note 2)	SD101AWS SD101BWS SD101CWS SD101AWS SD101BWS SD101BWS SD101CWS	V <sub>FM</sub>		0.41 0.40 0.39 1.00 0.95 0.90	v	$ I_{F} = 1.0mA  I_{F} = 1.0mA  I_{F} = 1.0mA  I_{F} = 15mA  I_{F} = 15mA  I_{F} = 15mA \\ I_{F} = 15mA $
Peak Reverse Current (Note 2)	SD101AWS SD101BWS SD101CWS	I <sub>RM</sub>	_	200	nA	$V_{R} = 50V$ $V_{R} = 40V$ $V_{R} = 30V$
Total Capacitance	SD101AWS SD101BWS SD101CWS	Ст	_	2.0 2.1 2.2	pF	V <sub>R</sub> = 0V, f = 1.0MHz
Reverse Recovery Time		t <sub>rr</sub>	_	1.0	ns	$I_{F} = I_{R} = 5.0 \text{mA},$ $I_{rr} = 0.1 \text{ x } I_{R}, R_{L} = 100 \Omega$

#### **Electrical Characteristics** @ T<sub>A</sub> = 25°C unless otherwise specified

Notes: 1. Part mounted on FR-4 PC board with recommended pad layout, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.

2. Short duration test pulse used to minimize self-heating effect.

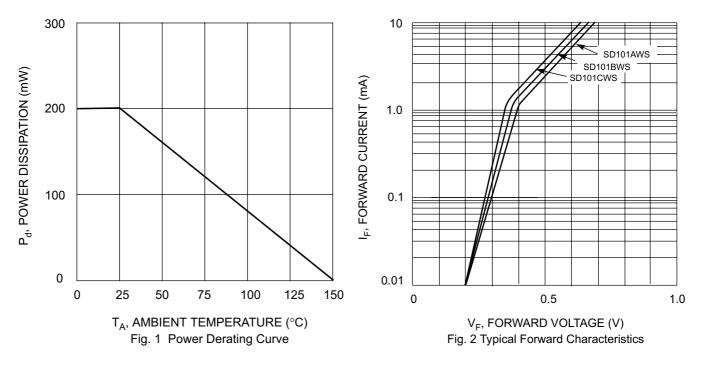

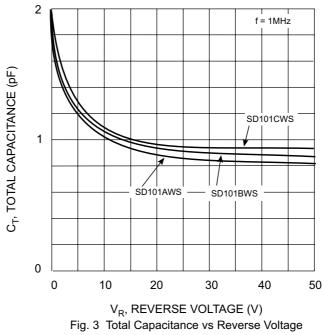

## Ordering Information (Note 3)

Device	Packaging	Shipping
SD101AWS-7	SOD-323	3000/Tape & Reel
SD101BWS-7	SOD-323	3000/Tape & Reel
SD101CWS-7	SOD-323	3000/Tape & Reel

Notes: 3. For Packaging Details, go to our website at: http://www.diodes.com/datasheets/ap02007.pdf.

## **Marking Information**



XX = Product Type Marking Code (See Page 1)