

LOW VF SCHOTTKY RECTIFIER 50 Volts

VOLTAGE

FEATURES

- · Ideal for automated placement
- · Low forward voltage drop, low power losses
- · High efficiency operation
- · Low thermal resistance
- · Ultra thin profile package for space constrained utilization
- · Package suitable for automated handling
- Lead free in comply with EU RoHS 2011/65/EU directives.
- Green molding compound as per IEC61249 Std. . (Halogen Free)

CURRENT


MECHANICAL DATA

Case : TO-277, Plastic


Terminals : Solderable per MIL-STD-750, Method 2026

Weight : 0.0037 ounces, 0.1073 grams

Marking : SVM1550U



15 Amperes

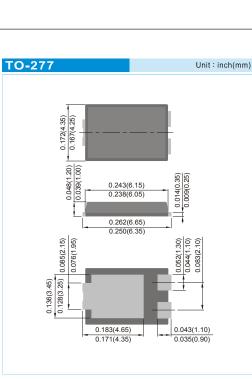

MAXIMUM RATINGS(TA=25°C unless otherwise noted)

PARAMETER			VALUE	UNIT
Maximum Recurrent Peak Reverse Voltage			50	V
Maximum RMS Voltage			35	V
Maximum DC Blocking Voltage			50	V
Maximum Average Rectified Output Current			15	А
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load (JEDEC method)			275	А
Typical Thermal Resistance	(Note 1) (Note 2)	Rojc Roja	6 110	°C/W
Operating Junction Temperature Range And Storage Temperature Range		TJ,TSTG	-55 to + 150	°C

NOTES :


- 1.Mounted on an FR4 PCB, single-sided copper, with 10cm*10cm*0.5mm copper pad area
- 2. Mounted on an FR4 PCB, single-sided copper, mini pad.



SVM1550U

ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
Breakdown voltage	Vbr	I R=0.5mA	Ta=25°C	50	-	-	V
Instantaneous forward voltage	VF	F=1A F=2A F=15A F=1A F=2A	Ta=25°C Ta=125°C	- - - -	0.28 0.31 0.44 0.18 0.21	- - 0.49 - -	V V
Reverse current	l r	I F=15A Vr=40V	Ta=25°C Ta=125°C	- - -	0.4 65 15	-	μA mA
		VR=50V	Ta=25°C Ta=125°C	-	- 20	320 -	μA mA

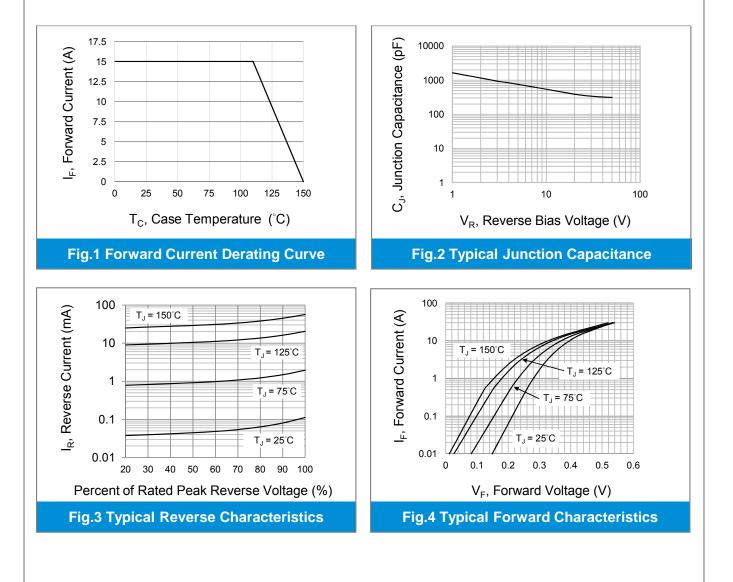






SVM1550U

MOUNTING PAD LAYOUT

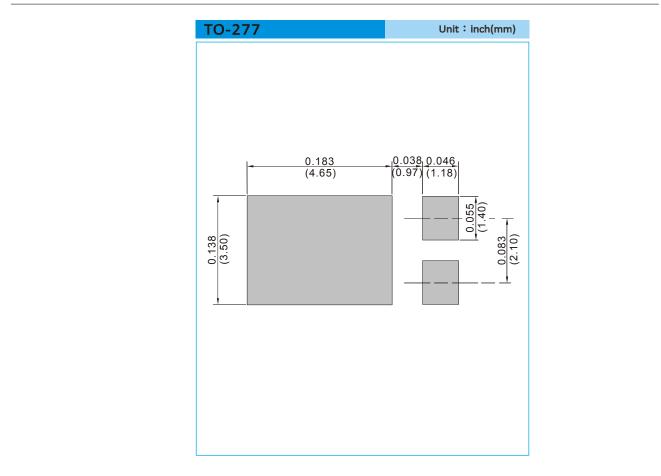


ORDER INFORMATION

Packing information

T/R - 5K per 13" plastic Reel



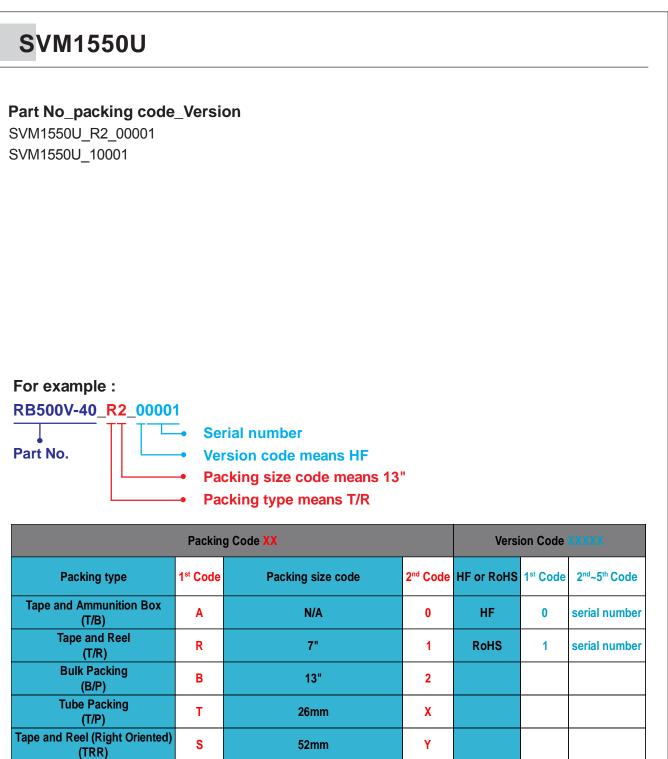

PANASERT T/B CATHODE UP

(PBCU) PANASERT T/B CATHODE DOWN

(PBCD)

U

D

Tape and Reel (Left Oriented)

(TRL)

FORMING

L

F





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.