
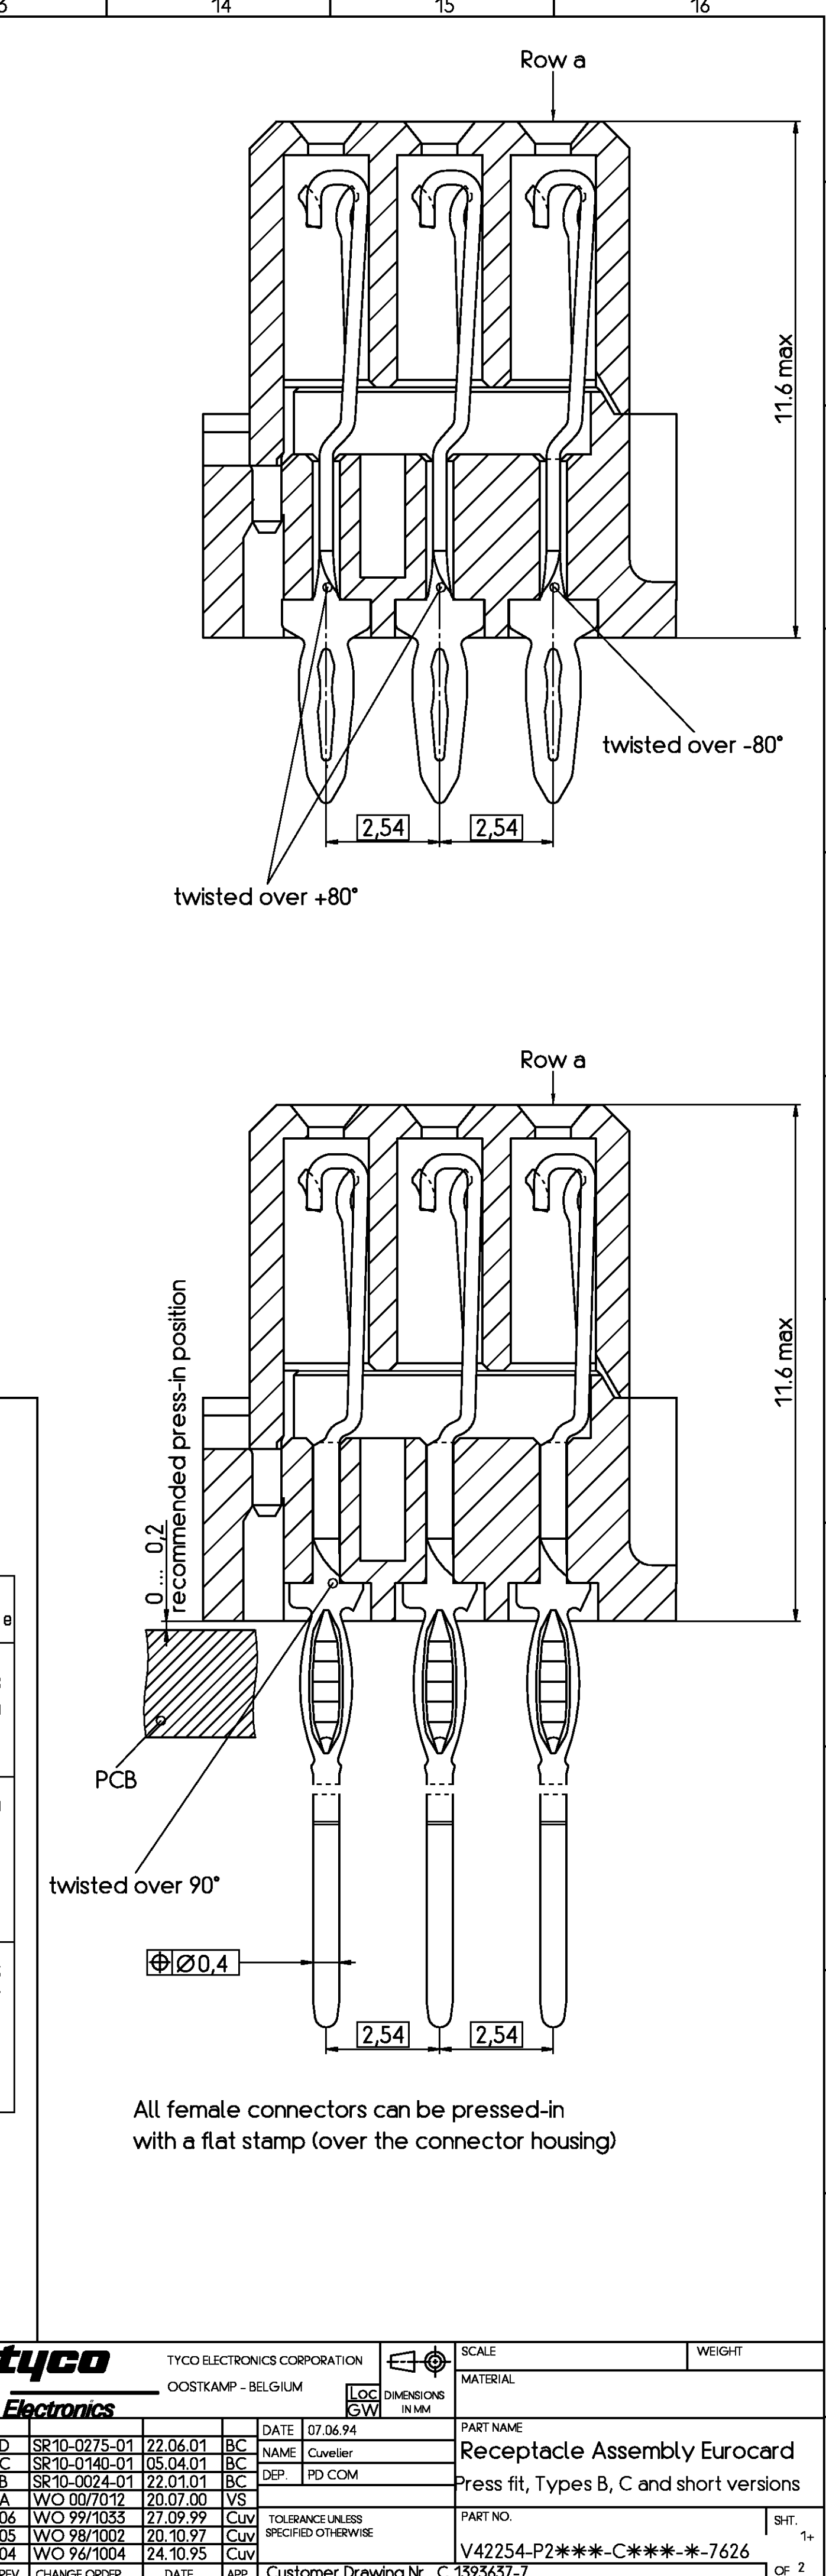
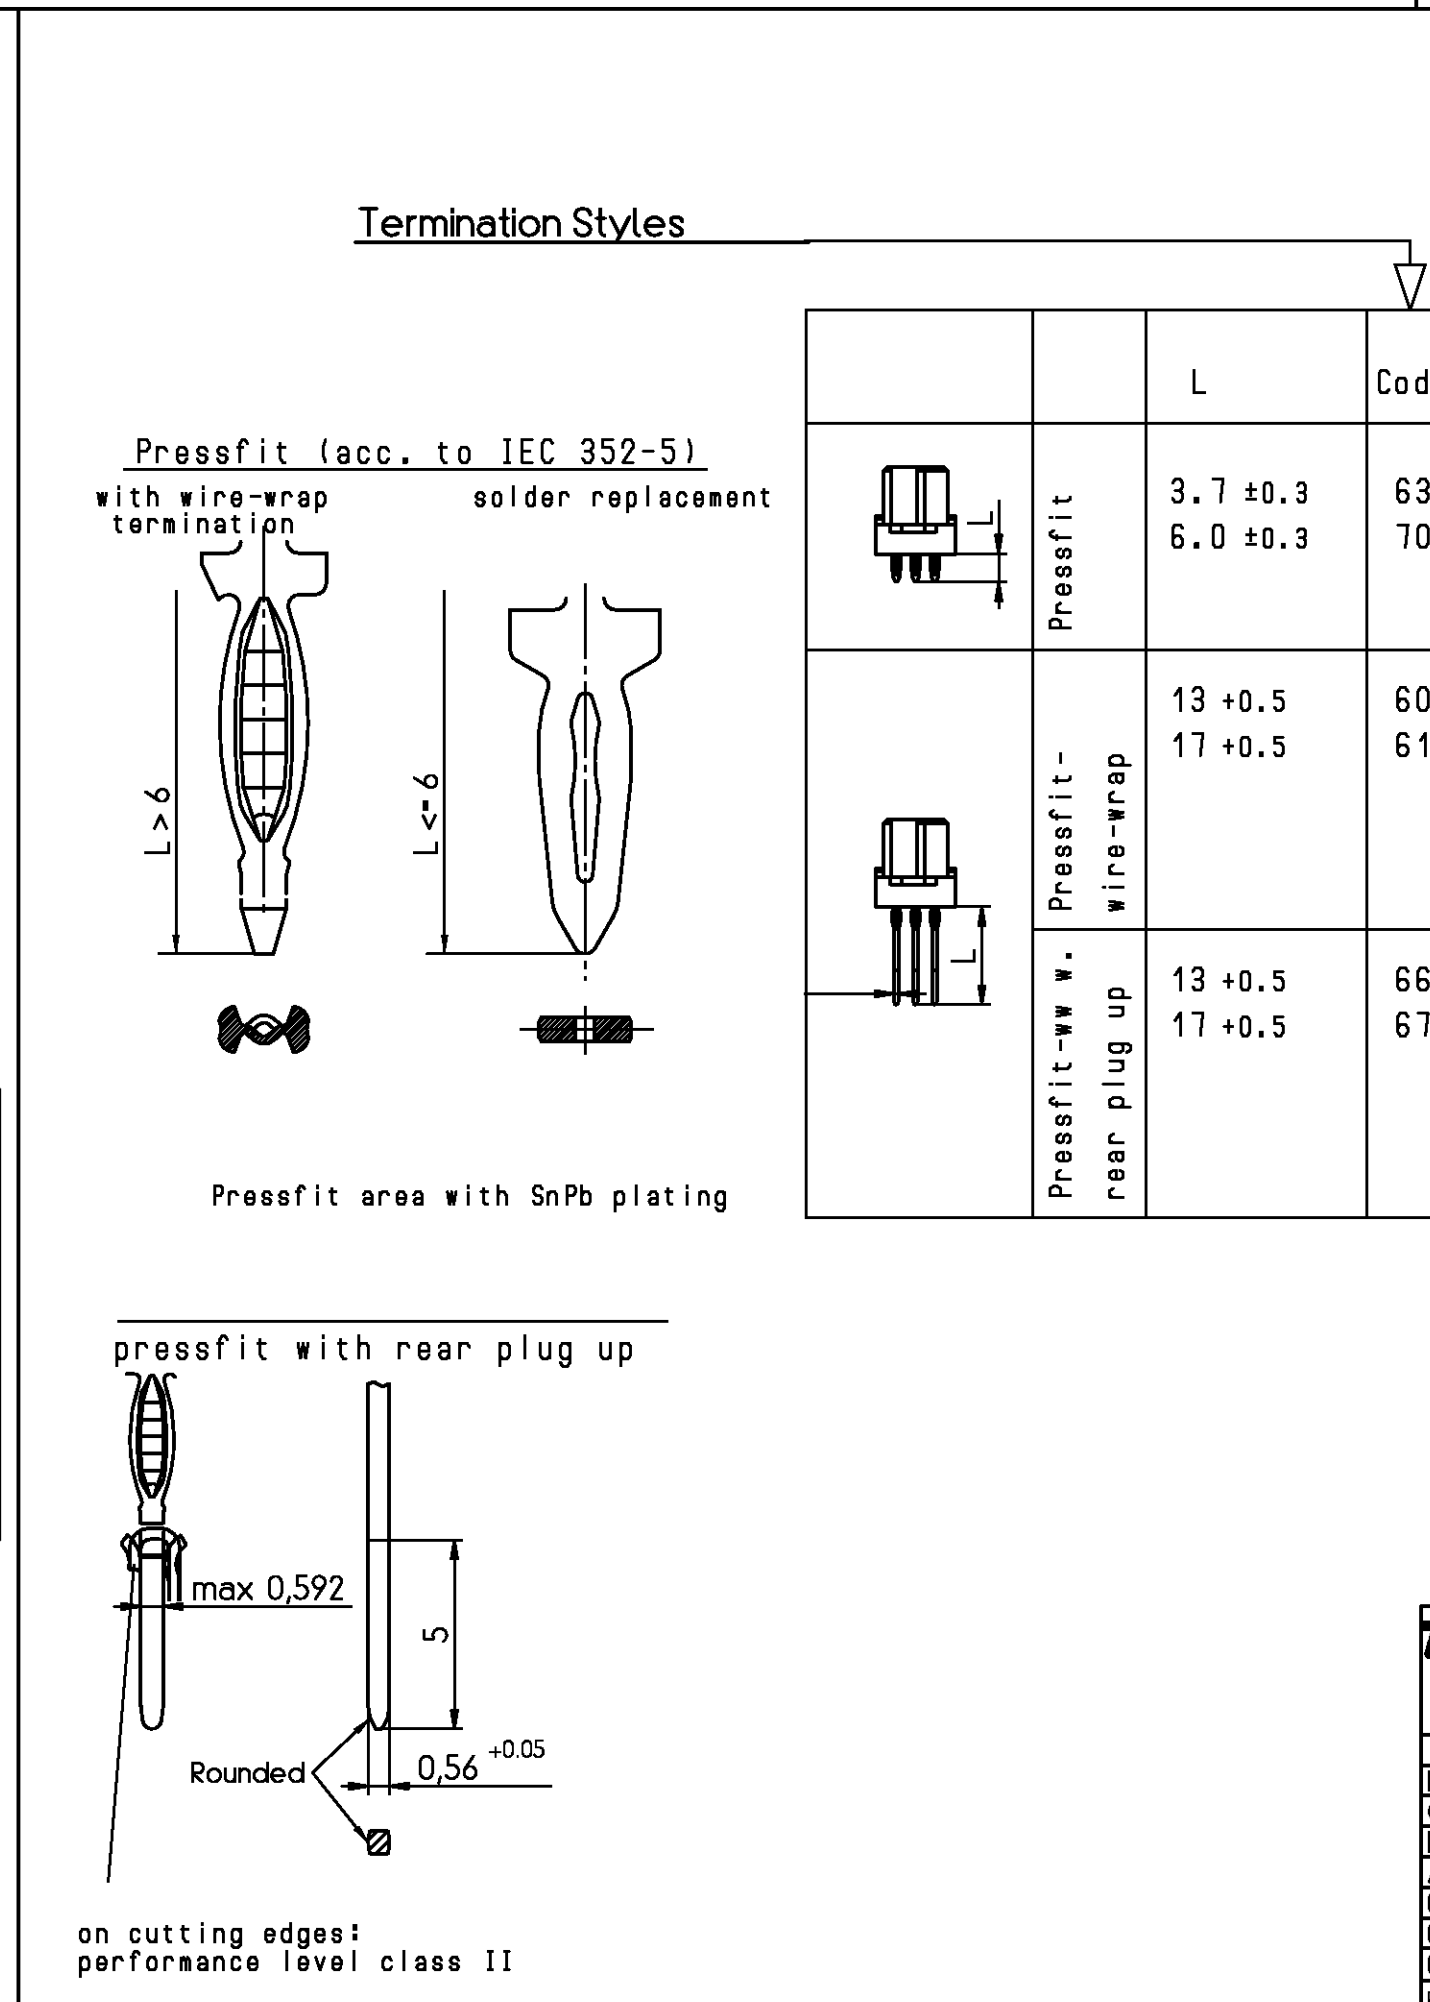
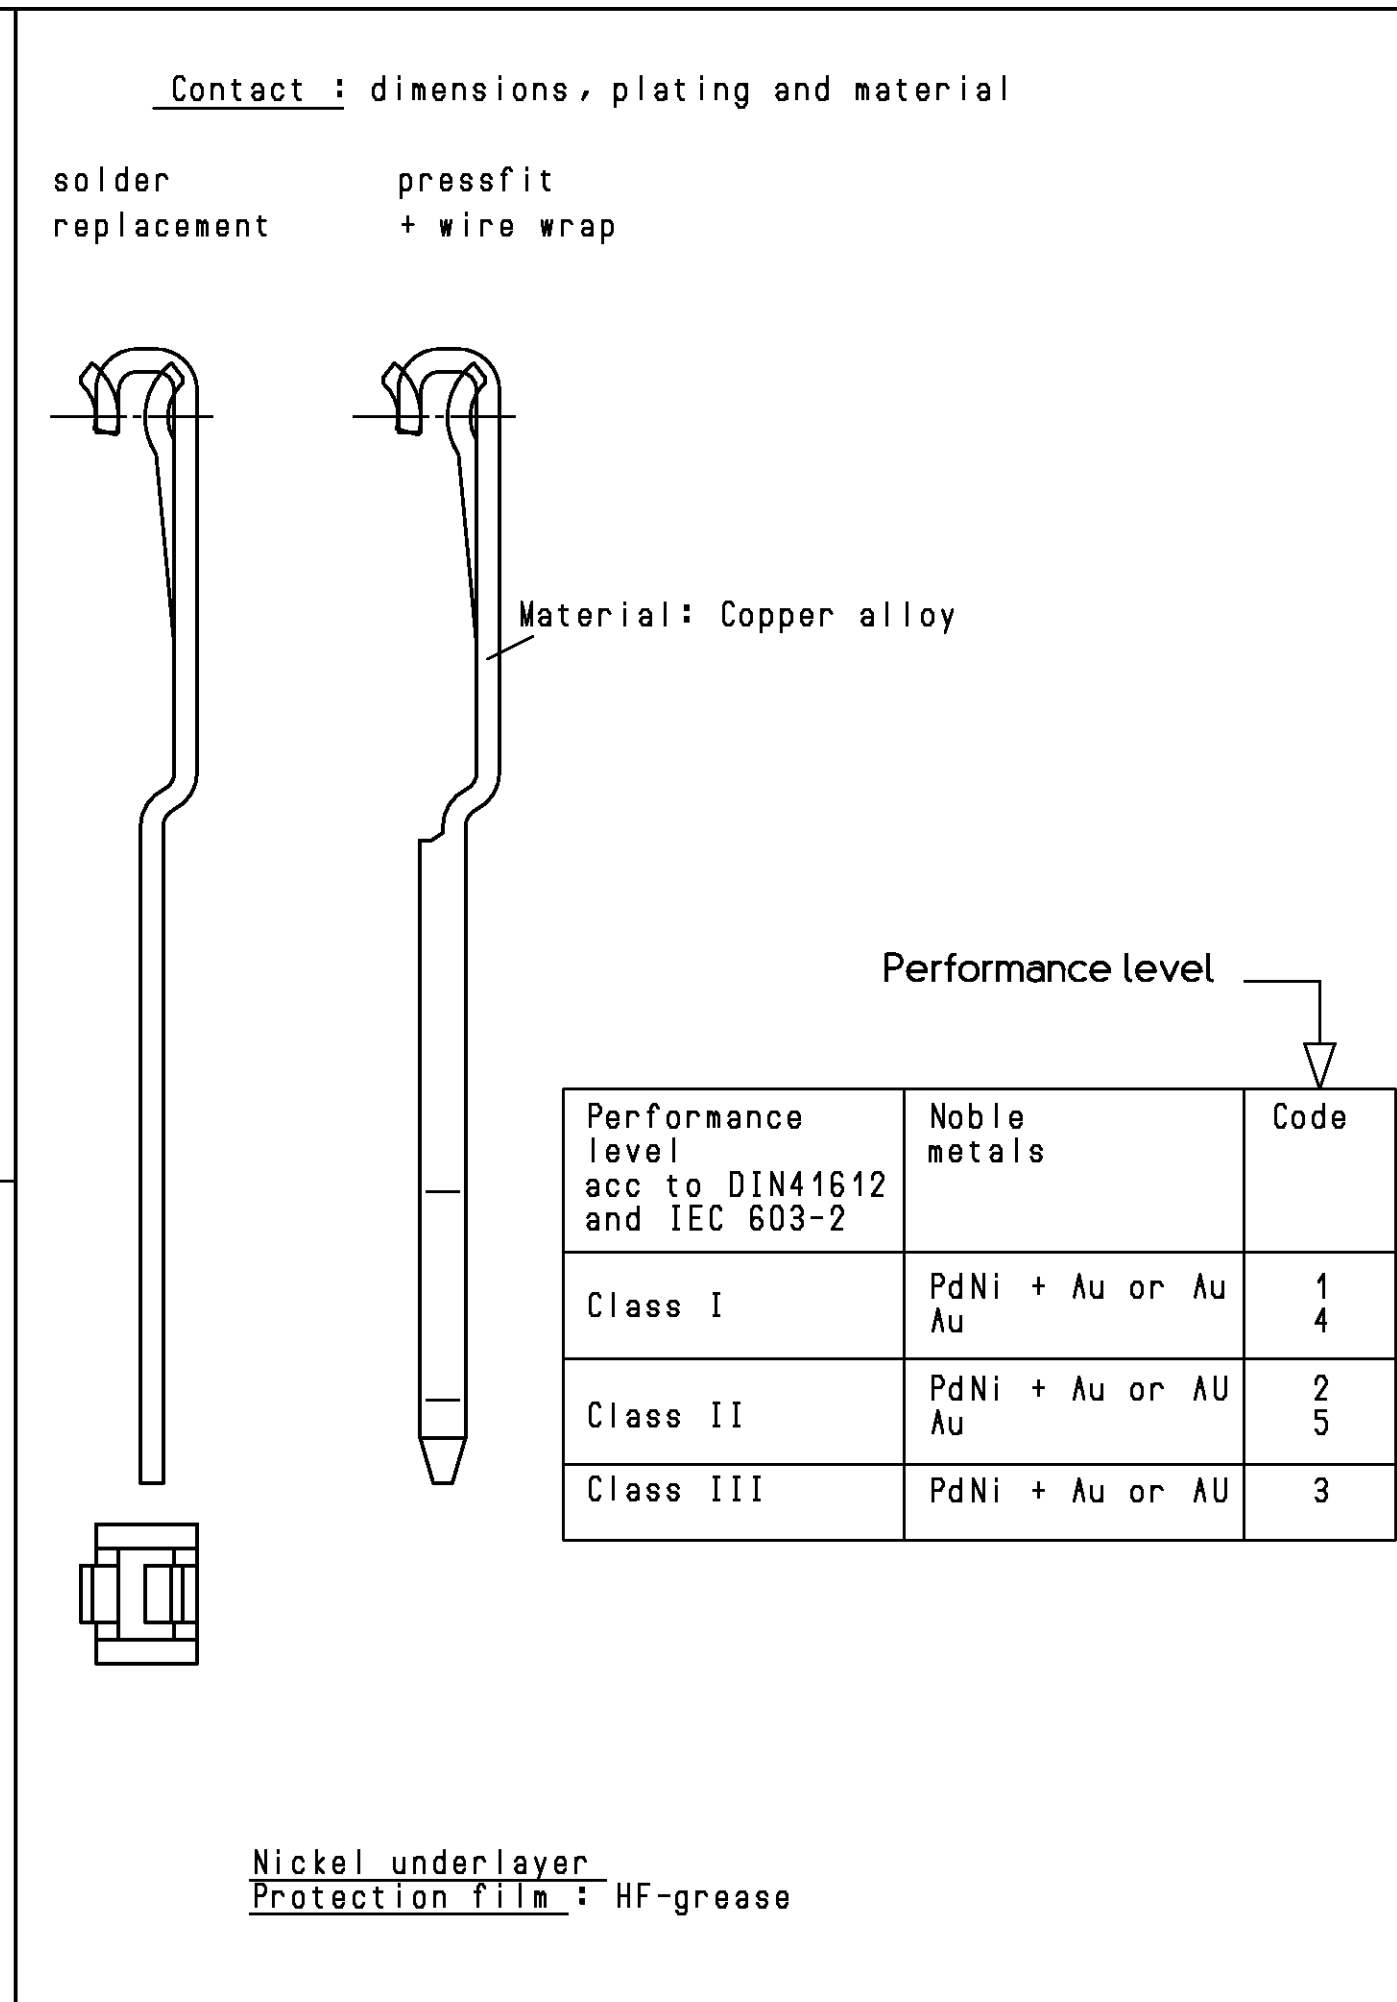
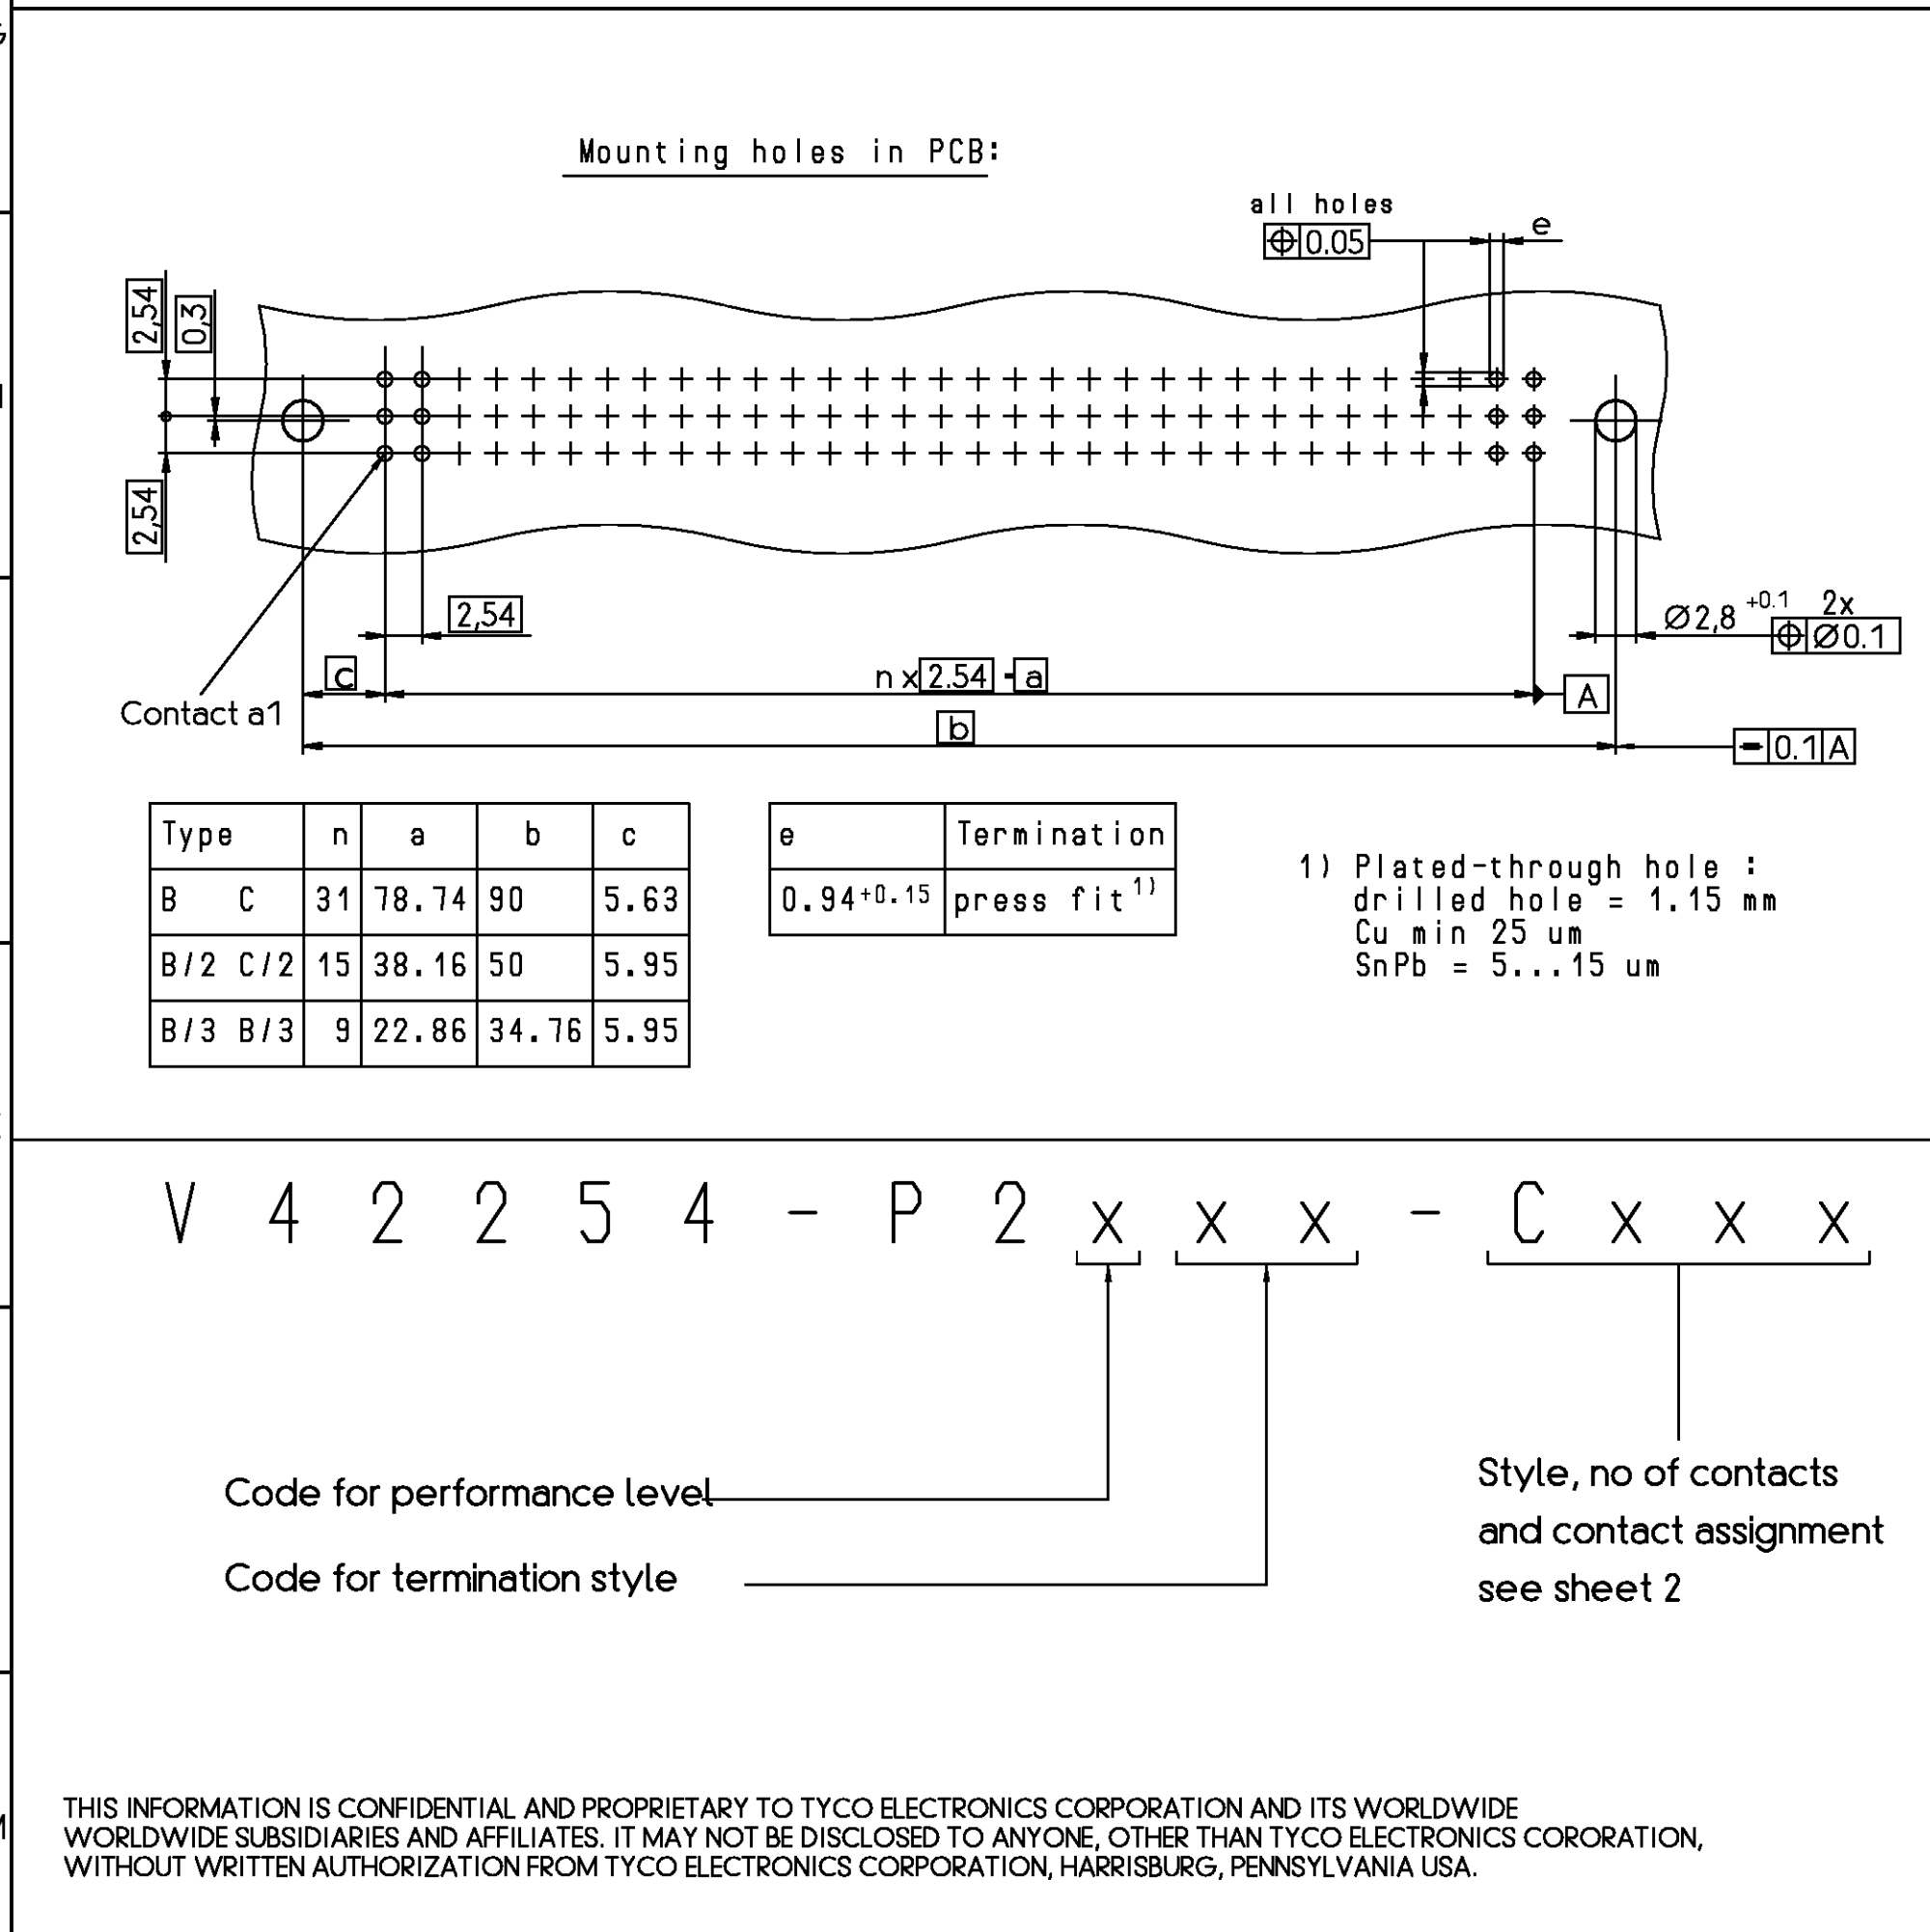


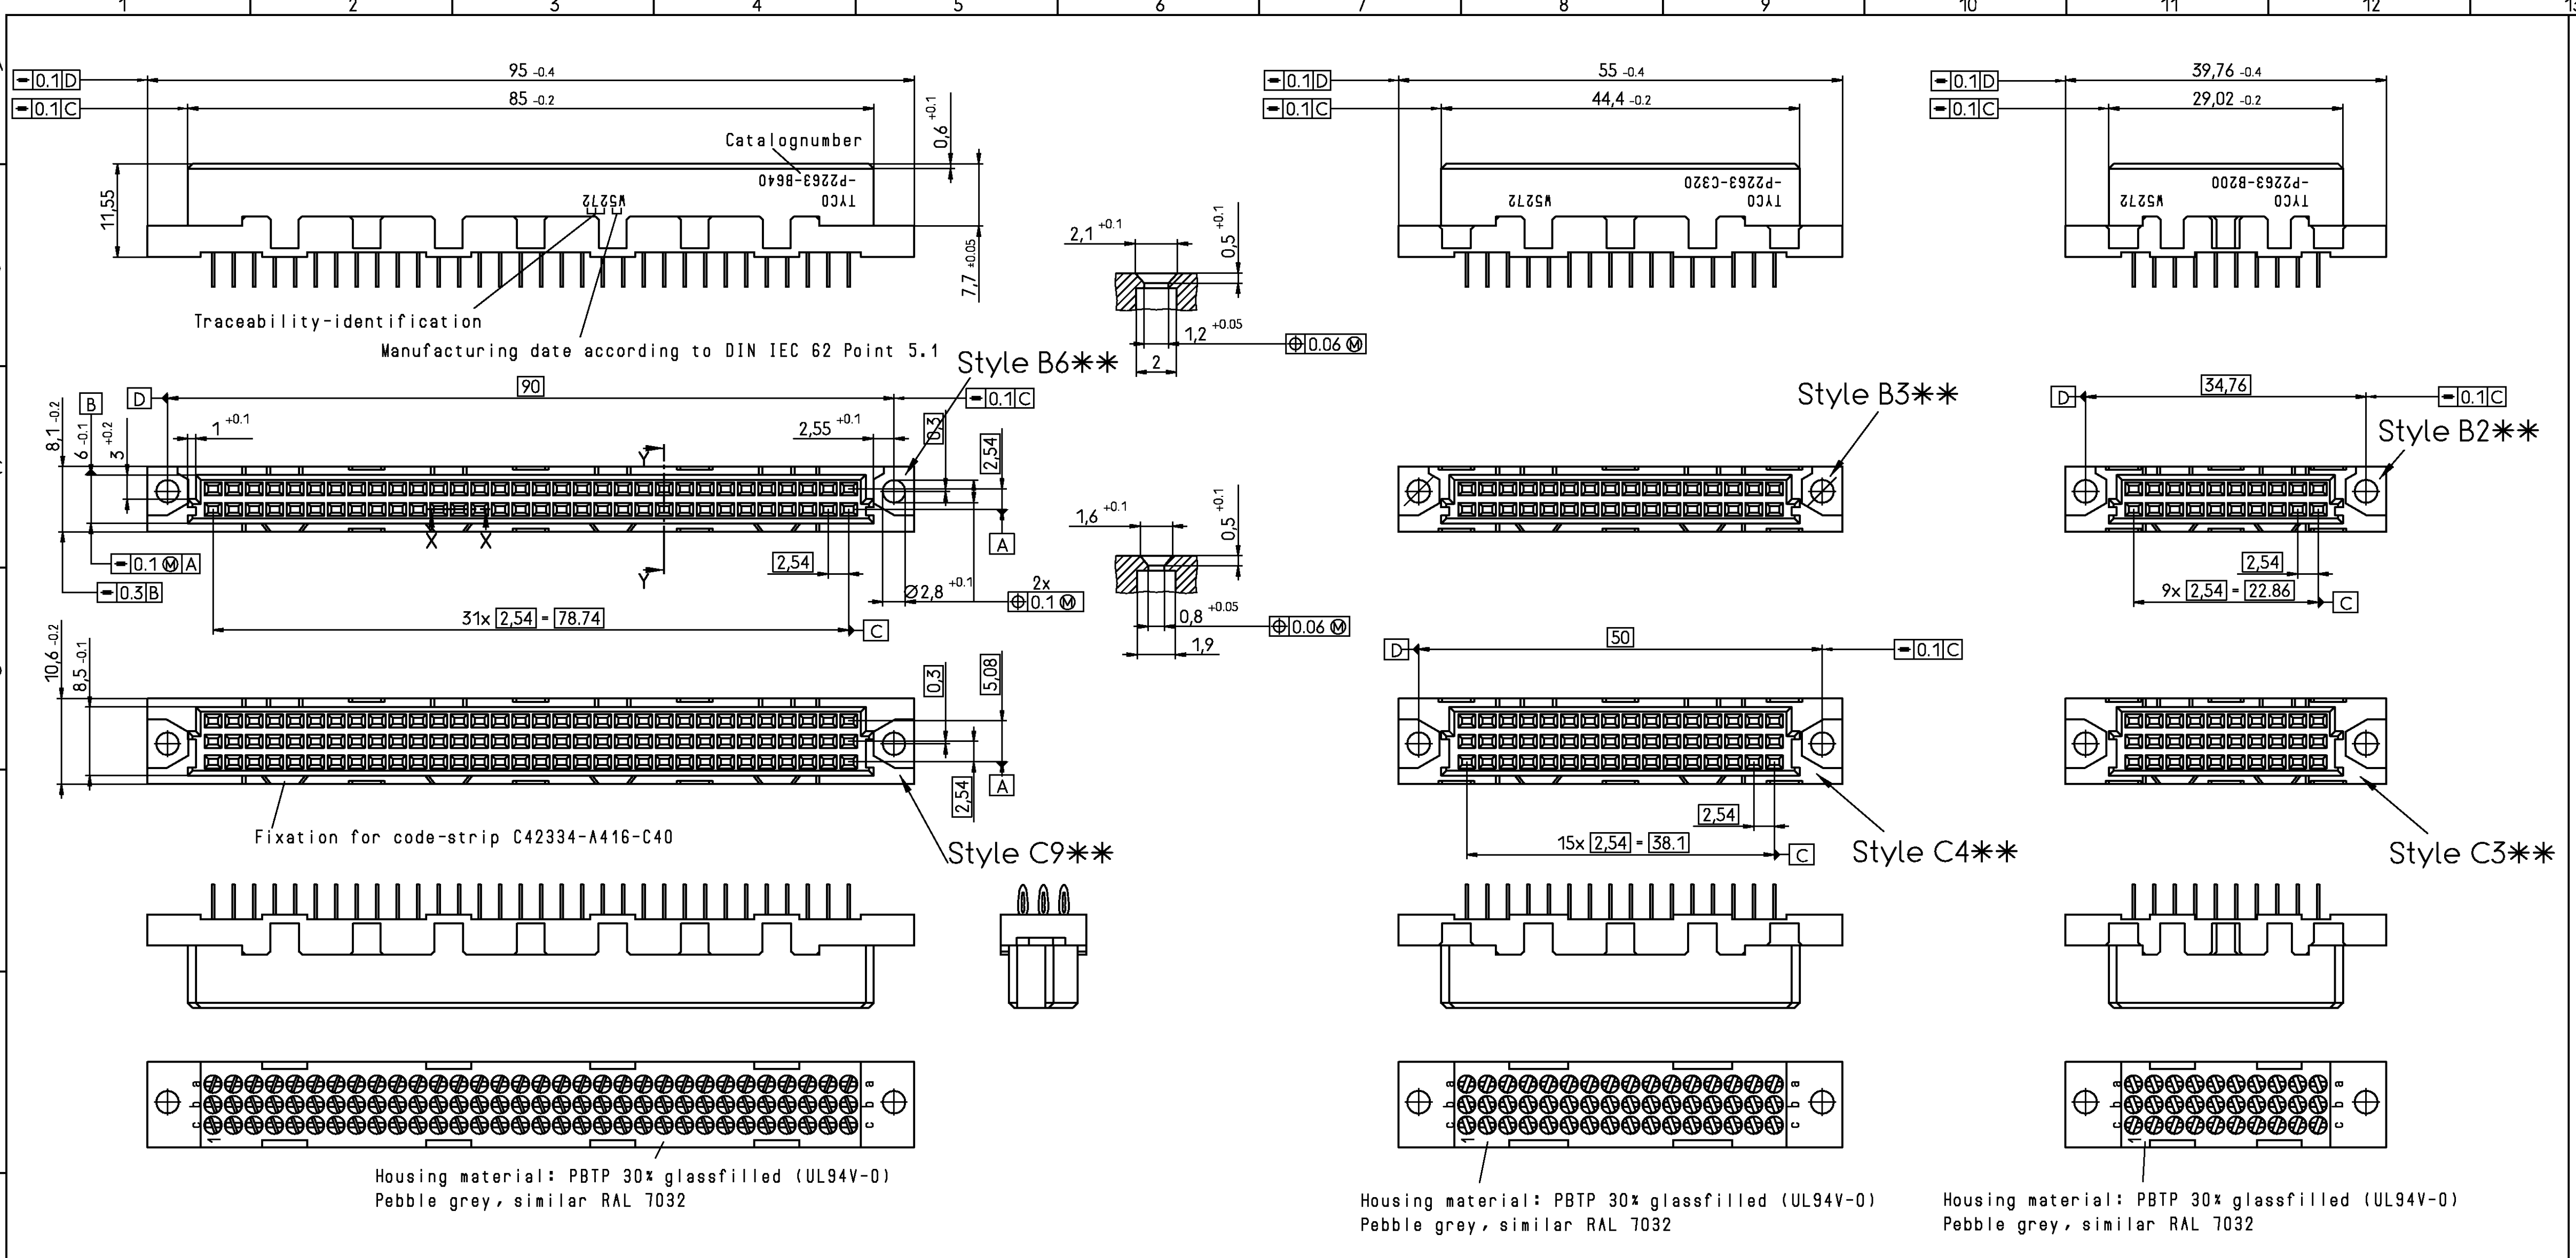

tyco			TYCO ELECTRONICS CORPORATION					SCALE		WEIGHT	
Electronics			OOSTKAMP - BELGIUM					MATERIAL			
			LOC		DIMENSIONS IN MM		PART NAME				
D	SR10-0275-01	22.06.01	BC	DATE 07.06.94			Receptacle Assembly Eurocard				
C	SR10-0140-01	05.04.01	BC	DEP. Cuvelier			Press fit, Types B, C and short versions				
B	SR10-0024-01	22.01.01	BC	DEP. PD COM							
A	WO 007012	20.07.00	VS	TOLERANCE UNLESS SPECIFIED OTHERWISE			PART NO.				SHT. 1+
06	WO 99/1033	27.09.99	CUV				V42254-P2***-C***-7626				
05	WO 98/1002	20.10.97	CUV								
04	WO 96/1004	24.10.95	CUV								
REV.	CHANGE ORDER	DATE	APP.	Customer Drawing Nr. C 1393637-7				OF 2			

	1	2	3	4	5	6	7	8	9	10	11	12
A												
	Old Part Number	Typo Part Number	Style & Number of Positions	Termination posts			Loaded Rows		Performance Level	Board Locks		
B	V42254-P2163-C483	1393637-6	C48	3.7mm Press-in terminals			row atc , every pitch	1	No			
	V42254-P2163-C960	1393637-1	C96	3.7mm Press-in terminals			every row , every pitch	1	No			
	V42254-P2163-C963	1393637-9	C96	3.7mm Press-in terminals			row atc , every pitch	1	No			
	V42254-P2167-C960	1-1393637-0	C96	17mm Press-in terminals with wire-wrap and insertion area level 2			every row , every pitch	1	No			
	V42254-P2170-C960	1-1393637-2	C96	6.0mm Press-in terminals			every row , every pitch	1	No			
	V42254-P2260-B640	1-1393637-9	B64	13mm Press-in terminals with wire-wrap			every row , every pitch	2	No			
	V42254-P2260-B640N	2-1393637-0	B64	13mm Press-in terminals with wire-wrap			every row , every pitch	2	No	1)		
	V42254-P2260-C480	2-1393637-2	C48	13mm Press-in terminals with wire-wrap			every row , every pitch	2	No			
	V42254-P2260-C960	2-1393637-3	C96	13mm Press-in terminals with wire-wrap			every row , every pitch	2	No			
	V42254-P2260-C962	2-1393637-5	C96	13mm Press-in terminals with wire-wrap			row atb , every pitch	2	No			
	V42254-P2260-C963	2-1393637-6	C96	13mm Press-in terminals with wire-wrap			row atc , every pitch	2	No			
	V42254-P2261-B640	2-1393637-8	B64	17mm Press-in terminals with wire-wrap			every row , every pitch	2	No			
	V42254-P2261-C960	2-1393637-9	C96	17mm Press-in terminals with wire-wrap			every row , every pitch	2	No			
C	V42254-P2261-C963	3-1393637-0	C96	17mm Press-in terminals with wire-wrap			row atc , every pitch	2	No			
	V42254-P2263-B320	3-1393637-3	B32	3.7mm Press-in terminals			every row , every pitch	2	No			
	V42254-P2263-B325	3-1393637-4	B32	3.7mm Press-in terminals			every row , every even pitch	2	No			
	V42254-P2263-B325N	3-1393637-5	B32	3.7mm Press-in terminals			every row , every even pitch	2	No	1)		
	V42254-P2263-B640	3-1393637-6	B64	3.7mm Press-in terminals			every row , every pitch	2	No			
	V42254-P2263-C300	4-1393637-0	C30	3.7mm Press-in terminals			every row , every pitch	2	No			
	V42254-P2263-C303	4-1393637-2	C30	3.7mm Press-in terminals			row atc , every pitch	2	No			
	V42254-P2263-C480	4-1393637-4	C48	3.7mm Press-in terminals			every row , every pitch	2	No			
	V42254-P2263-C480N	4-1393637-5	C48	3.7mm Press-in terminals			every row , every pitch	2	No	1)		
	V42254-P2263-C960	4-1393637-6	C96	3.7mm Press-in terminals			every row , every pitch	2	No			
	V42254-P2263-C963	4-1393637-9	C96	3.7mm Press-in terminals			row atc , every pitch	2	No			
D	V42254-P2263-C965	5-1393637-2	C96	3.7mm Press-in terminals			every row , every even pitch	2	No			
	V42254-P2263-C968	5-1393637-3	C96	3.7mm Press-in terminals			row atc , every even pitch	2	No			
	V42254-P2266-B320	6-1393637-2	B32	13mm Press-in terminals with wire-wrap and insertion area level 2			every row , every pitch	2	No			
	V42254-P2266-B640	6-1393637-3	B64	13mm Press-in terminals with wire-wrap and insertion area level 2			every row , every pitch	2	No			
	V42254-P2266-C480	6-1393637-5	C48	13mm Press-in terminals with wire-wrap and insertion area level 2			every row , every pitch	2	No			
	V42254-P2266-C960	6-1393637-6	C96	13mm Press-in terminals with wire-wrap and insertion area level 2			every row , every pitch	2	No			
	V42254-P2266-C963	6-1393637-9	C96	13mm Press-in terminals with wire-wrap and insertion area level 2			row atc , every pitch	2	No			
	V42254-P2266-C965	7-1393637-0	C96	13mm Press-in terminals with wire-wrap and insertion area level 2			every row , every even pitch	2	No			
	V42254-P2266-C968	7-1393637-1	C96	13mm Press-in terminals with wire-wrap and insertion area level 2			row atc , every even pitch	2	No			
	V42254-P2267-C960	7-1393637-3	C96	17mm Press-in terminals with wire-wrap and insertion area level 2			every row , every pitch	2	No			
	V42254-P2267-C963	7-1393637-4	C96	17mm Press-in terminals with wire-wrap and insertion area level 2			row atc , every pitch	2	No			
E	V42254-P2270-C483	2-1392009-0	C48	6.0mm Press-in terminals			row atc , every pitch	2	No			
	V42254-P2270-C960	8-1393637-0	C96	6.0mm Press-in terminals			every row , every pitch	2	No			
	V42254-P2270-C960N	8-1393637-2	C96	6.0mm Press-in terminals			every row , every pitch	2	No	1)		
	V42254-P2270-C963	8-1393637-4	C96	6.0mm Press-in terminals			row atc , every pitch	2	No			
	V42254-P2270-C963N	8-1393637-6	C96	6.0mm Press-in terminals			row atc , every pitch	2	No	1)		
	V42254-P2270-C968	8-1393637-7	C96	6.0mm Press-in terminals			row atc , every even pitch	2	No			
	V42254-P2470-C960	1-1393638-2	C96	6.0mm Press-in terminals			every row , every pitch	1	No			
	V42254-P2470-C963	1-1393638-3	C96	6.0mm Press-in terminals			row atc , every pitch	1	No			

1) Connectors without marking, in Tyco Electronics packaging.

Active part numbers.

Contact Tyco Electronics for other configuration availability

				TYCO ELECTRONICS CORPORATION OOSTKAMP - BELGIUM						SCALE _____		WEIGHT _____	
Electronics				LOC GW		DIMENSIONS IN MM		MATERIAL _____					
				DATE		07.06.94		PART NAME					
				NAME		Cuveller		Recteplate Assembly Eurocard					
				APP.		PD COM		Press fit, Types B, C and short versions					
D SR10-0275-01				22.06.01		BC		PART NO.					
C SR10-0140-01				05.04.01		BC		TOLERANCE UNLESS SPECIFIED OTHERWISE		SH. 2-			
B SR10-0024-01				22.01.01		BC		V42Z54-P2***-C***-*-7626					
A WO 007012				20.07.00		VS		139563-7					
REV.		CHANGE		DATE		APP.		Customer Drawing N°		OF 2			

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN TYCO ELECTRONICS PERSONEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG PENNSYLVANIA USA.

-
- Home
- Part Number Search
- Text Search
- Alternate Part Search
- Multiple Part Comparison
- Alphabetical Search
- Brand Search
- Industry Product Search
- Product Type Search
- Product Family Search
- Competitor Cross Reference
- Document Number Search
- Lead Free Solutions
- Help/Glossary

Current Brand View

AMP

[View All Tyco Electronics Brands](#)
Click to activate links to all other products

.100 & .200 Centerline DIN 41612 Connectors (Eurocard)

Eurocard Type B Connectors .100 Centerline - 2 Row

AMP3-1393637-4 -- 2 of 3 products

ActiveActive

(Tyco Electronics P/N: 3-1393637-4)

PreviousNext

Sales InformationAMP ACESStep Search Screen

Related DocumentsGeneral Information

PricingProduct Availability

Please use the customer drawing for all design activity.

- Customer Drawing: 1393637-7, Rev. D
Document Title: Receptacle Assembly Eurocard, Press fit,
Types B, C and short versions.

218896.pdf

[218896.pdf](#) (218K)

Searchable Features:	
Brand:	AMP
Mating Type:	Receptacle
No. of Positions:	32
PCB Mount Angle:	Vertical
Post Type:	ACTION PIN
Make First / Break Last:	No
Termination Post Length (mm [in]):	17.00 [.669]

Other Properties:	
Rows Loaded:	A, B, C
Terminate To:	Printed Circuit Board
Contact Material:	Copper Alloy
Housing Material:	30% Glass-Filled Polyester
Color:	Gray
Housing Flammability Rating:	UL 94V-0
Positions Loaded:	Every even pitch

Contact Cross Section (mm [in]):	0.60 [.024] Sq.
DIN Level:	II
Size (mm [in]):	Standard
Special PCB Retention:	Yes
Special PCB Retention Method:	ACTION PIN Posts

[Copyright](#) and [Privacy Statement](#)

Visit [Tyco International, Ltd.](#)

[Products](#) | [Brands](#) | [Industries](#) | [Customer Service](#) | [About](#) | [Home](#)