


# Part Number 880371 915 MHz BAW Filter


#### **Features**

- ISM Applications
- Usable bandwidth of 13 MHz
- Single-ended operation
- Ceramic Surface Mount Package
- Hermetic

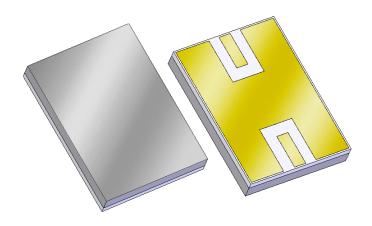


#### **Package**

Surface Mount 6.39 x 4.61 x 0.84 mm

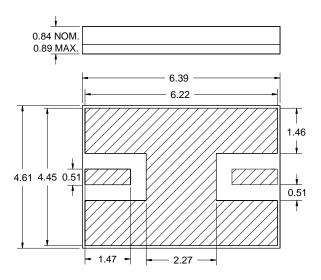

**Pin Configuration** 

**Bottom View** 



Pin No.	Description
I/O	Input/Output
GND	Ground

Overall width, length, and thickness are the only critical dimensions. All other dimensions are for reference only.

Dimensions shown are nominal in millimeters All tolerances are  $\pm 0.13$ mm except overall length and width  $\pm 0.25$ mm

Body: Sapphire Package: Alumina Terminations: Au plating 0.5 - 2.5μm, over a 2.0 – 6.0 μm Ni plating



## Part Number 880371 915 MHz BAW Filter

## Electrical Specifications (1)

Operating Temperature Range: (2) -40 to +85 °C


Parameter (3)	Minimum	Typical	Maximum	Unit
Center Frequency	910	915	920	MHz
Insertion Loss @ Fo	-	3	4.5	dB
3 dB Bandwidth (4)	13	18	-	MHz
40 dB Lower Frequency Edge	892.5	-	-	MHz
40 dB Upper Frequency Edge	-	-	937.5	MHz
VSWR @ Fo	-	1.8	2:1	
Source Impedance	-	50	-	Ω
Load Impedance	-	50	-	Ω

#### Notes:

- 1. All specifications are based on the test circuit shown below
- 2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
- 3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 4. Referenced to the insertion loss at center frequency

#### **Test Circuit:**

 $\begin{array}{c} 50~\Omega\\ \text{Single-ended}\\ \text{Input} \end{array}$ 




 $\begin{array}{c} 50~\Omega\\ \text{Single-ended}\\ \text{Output} \end{array}$ 




# Part Number 880371 915 MHz BAW Filter


## Typical Performance (at +25°C)




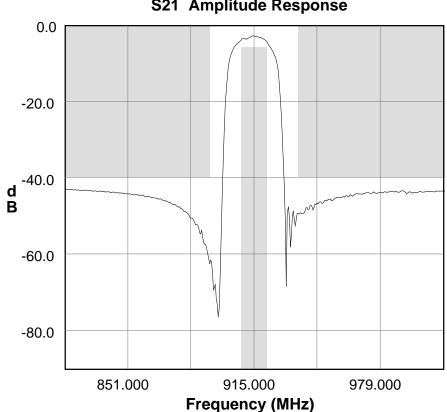

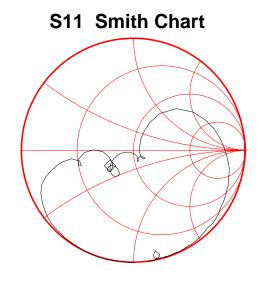

#### **S21 Amplitude Response**

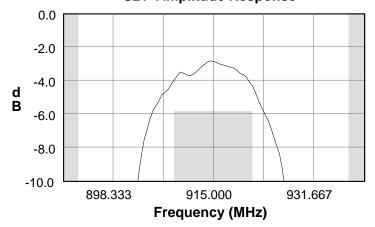

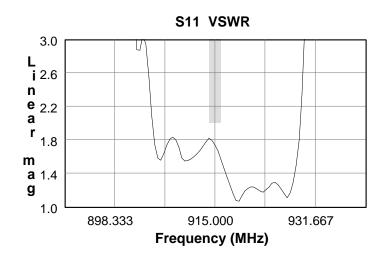




# Part Number 880371 915 MHz BAW Filter

### **Matching Schematics**


 $\begin{array}{c} 50~\Omega\\ \text{Single-ended}\\ \text{Input} \end{array}$ 




50 Ω Single-ended Output

#### **Marking**

## **PCB Footprint**

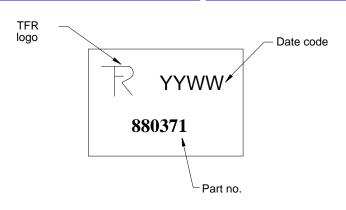

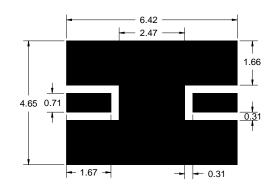

The date code consists of: YY = last digit of year, WW = 2 digit week

This footprint represents a recommendation only Dimensions shown are nominal in millimeters

#### **Tape and Reel**

Tape and Reel available upon request EIA-481

Tinning available per J-STD-001

ROHS compliant (no tinning)
DFARS compliant



# Part Number 880371 915 MHz BAW Filter

Maximum Ratings							
Parameter	Symbol	Minimum	Maximum	Unit			
Operating Temperature Range	Т	-40	+85	°C			
Storage Temperature Range	T <sub>stq</sub>	-55	+100	°C			

#### **Warnings**

Electrostatic Sensitive Device (ESD)



Avoid ultrasonic exposure

## **Links to Additional Technical Information**

**Qualification Flowchart PCB Layout Tips** Soldering Profile

**S-Parameters** Other Technical Information

Sawtek's liability is limited only to the Bulk Acoustic Wave (BAW) component(s) described in this data sheet. Sawtek does not accept any liability for applications, processes, circuits or assemblies, which are implemented using any Sawtek component described in this data sheet.

#### **Contact Information**

TriQuint (1 SEMICONDUCTOR 63140 Britta St. Bldg. C Bend, OR 97701

Phone: +1 (972) 994-8465 Fax: +1 (972) 994-8504 Email: <a href="mailto:custservbend@tqs.com">custservbend@tqs.com</a> Web: www.triquint.com

Or contact one of our worldwide Network of sales offices, Representatives or distributors