

Surge Arrester

2-Electrode-Arrester

L71-A270X

Ordering code: B88069X2030S102

DC spark-over voltage ^{1) 2)}	230 338	V
Impulse spark-over voltage		
at 100 V/µs - for 99 % of measured values - typical values of distribution	< 500 < 450	V V
at 1 kV/µs - for 99 % of measured values - typical values of distribution	< 550 < 500	V V
Nominal impulse discharge current (wave 8/20 µs) Single impulse discharge current (wave 8/20 µs)	5 10	kA kA
Nominal alternating discharge current (50 Hz, 1 s) Alternating discharge current (50 Hz, 9 cycles)	5 65	A A
Max. follow-on current at 110 V _{RMS}	200	A _{peak}
Insulation resistance at 100 V _{dc}	> 10	GΩ
Capacitance at 1 MHz	< 1.5	pF
Arc voltage at 1 A Glow to arc transition current Glow voltage	~ 22 ~ 0.5 ~ 140	V A V
Weight	~ 1.5	g
Operation and storage temperature	-40 +90	°C
Climatic category (IEC 60068-1)	40/ 90/ 21	
Marking, green	EPCOS 270 YY O270- Nominal voltageYY- Year of productionO- Non radioactive	

1) At delivery AQL 0.65 level II, DIN ISO 2859 In ionized mode

2)

Terms in accordance with ITU-T Rec. K.12 and DIN 57845/VDE0845




Surge Arrester

2-Electrode-Arrester

L71-A270X

Ordering code: B88069X2030S102

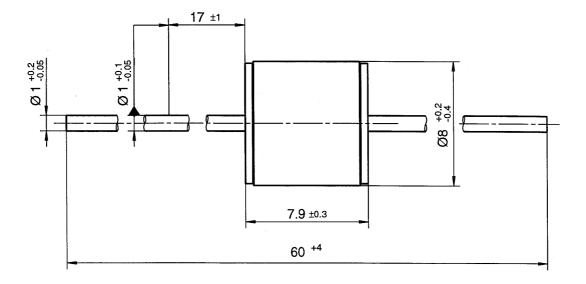

Not to scale

Dimensions in mm

Non controlled document

© EPCOS AG 2002. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.