

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0348050211](#)
Status: **Active**
Overview: [CTX Crimp Terminals](#)
Description: CTX150 Female Terminal, Tin (Sn), 22 AWG B-Wind, Right Payoff, Grip Code S

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Application Specification AS-34805-001-015 \(PDF\)](#)

General

Product Family	Crimp Terminals
Series	34805
Application	Power
Comments	Right Reel Payoff For automatic and semi-automatic crimping, use Left Reel Payoff terminals. See Sales Drawing for Left Reel Payoff Part Numbers.
Crimp Quality Equipment	Yes
Overview	CTX Crimp Terminals
Product Name	CTX150
UPC	884982651173

Physical

Durability (mating cycles max)	10
Gender	Female
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Nickel
Net Weight	0.224/g
Packaging Type	Reel
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	2.80mm
Wire Size AWG	22
Wire Size mm ²	0.35-0.50


Electrical

Current - Maximum per Contact	15.0A
Voltage - Maximum	250V

Material Info

Reference - Drawing Numbers

Application Specification	AS-34805-001-015
Sales Drawing	SD-34805-001

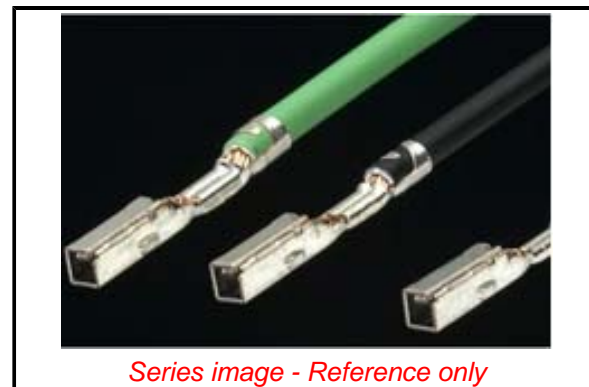

Series image - Reference only

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/01/2018 (15
January 2018)

Halogen-Free

Status

Not Relevant

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Not Relevant
ELV	Compliant
RoHS Phthalates	Not Contained

Search Parts in this Series

[34805 Series](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Hand Crimp Tool for CTX 1.50mm Receptacle Terminal, 0.30, 0.35, and 0.50mm ² Wires	0638193900

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION