InGaP HBT Gain Block



#### **Product Features**

- DC 4000 MHz
- +13.5 dBm P1dB at 900 MHz
- +26.5 dBm OIP3 at 900 MHz
- 15.5 dB Gain at 900 MHz
- Single Voltage Supply
- Green SOT-363 SMT Pkg.
- Internally matched to 50  $\Omega$

#### **Applications**

- Mobile Infrastructure
- CATV / DBS
- W-LAN / ISM
- RFID
- Defense / Homeland Security
- Fixed Wireless


#### **Product Description**

The AG302-63 is a general-purpose buffer amplifier that offers high dynamic range in a low-cost surface-mount package. At 900 MHz, the AG302-63 typically provides 15.5 dB gain, +26.5 dBm OIP3, and +13.5 dBm P1dB. The device combines dependable performance with consistent quality to maintain MTTF values exceeding 100 years at mounting temperatures of +85° C and is housed in a leadfree/green/RoHS-compliant SOT-363 industry standard SMT package.

The AG302-63 consists of Darlington pair amplifiers using the high reliability InGaP/GaAs HBT technology process technology and only requires DC-blocking capacitors, a bias resistor, and an inductive RF choke for operation.

The broadband MMIC amplifier can be directly applied to various current and next generation wireless technologies such as GPRS, GSM, CDMA, and W-CDMA. In addition, the AG302-63 will work for other various applications within the DC to 4 GHz frequency range such as CATV and fixed wireless.

#### **Functional Diagram**



Function	Pin No.
Input	3
Output/Bias	6
Ground	1, 2, 4, 5

#### Specifications (1)

Parameter	Units	Min	Тур	Max
Operational Bandwidth	MHz	DC		6000
Test Frequency	MHz		900	
Gain	dB		15.6	
Input Return Loss	dB		18	
Output Return Loss	dB		18	
Output IP3 (2)	dBm		+26.4	
Output IP2	dBm		+37	
Output P1dB	dBm		+13.4	
Noise Figure	dB		3.4	
Test Frequency	MHz		1900	
Gain	dB	13.5	14.5	15.5
Output IP3 (2)	dBm		+24.8	
Output P1dB	dBm		+12.2	
Device Voltage	V		4.23	
Device Current	mA		35	

#### Typical Performance (1)

Parameter	Units	Typical				
Frequency	MHz	500	900	1900	2140	
S21	dB	15.9	15.6	14.5	14.2	
S11	dB	-18	-18	-18	-18	
S22	dB	-20	-18	-18	-15	
Output P1dB	dBm	+13.2	+13.4	+12.2	+11.7	
Output IP3	dBm	+26.6	+26.4	+24.8	+24.3	
Noise Figure	dB	3.3	3.4	3.6	3.6	

#### **Absolute Maximum Rating**

Parameter	Rating
Operating Case Temperature	-40 to +85 °C
Storage Temperature	-55 to +125 °C
DC Voltage	+4.5 V
RF Input Power (continuous)	+10 dBm
Junction Temperature	+250 °C

Operation of this device above any of these parameters may cause permanent damage.

#### Ordering Information

Part No.	Description
AG302-63*	InGaP HBT Gain Block (lead-tin SOT-363 Pkg)
AG302-63G	InGaP HBT Gain Block (lead-free/green/RoHS-compliant SOT-363 Pkg)
AG302-63PCB	700 – 2400 MHz Fully Assembled Eval. Board

This package is being phased out in favor of the green package type which is backwards compatible for existing designs. Refer to Product Change Notification WJPCN06MAY05TC1 on the WJ website.

<sup>1.</sup> Test conditions: . T = 25° C, Supply Voltage = +5 V,  $R_{bias}$  = 22.1  $\Omega$ , 50  $\Omega$  System. 2. 3OIP measured with two tones at an output power of -2 dBm/tone separated by 10 MHz. The suppression on the largest IM3 product is used to calculate the 3OIP using a 2:1 rule.






## Typical Device RF Performance Supply Bias = +5 V, $R_{bias}$ = 22.1 $\Omega$ , $I_{cc}$ = 35 mA

Frequency	MHz	100	500	900	1900	2140	2400	3500	5800
S21	dB	16.0	15.9	15.6	14.5	14.2	13.9	12.5	9.2
S11	dB	-18	-18	-18	-18	-18	-18	-15	-11
S22	dB	-20	-20	-18	-18	-15	-15	-14	-8
Output P1dB	dBm	+13.5	+13.2	+13.4	+12.2	+11.7	+11.6	+9.5	
Output IP3	dBm	+26.6	+26.6	+26.4	+24.8	+24.3	+23.9		
Noise Figure	dB	3.3	3.3	3.4	3.6	3.6	3.7		


- Test conditions: T = 25° C, Supply Voltage = +5 V, Device Voltage = 4.23 V, Rbias = 22.1 Ω, Icc = 35 mA typical, 50 Ω System.
   3OIP measured with two tones at an output power of -2 dBm/tone separated by 10 MHz. The suppression on the largest IM3 product is used to calculate the 3OIP using a 2:1 rule.
   Data is shown as device performance only. Actual implementation for the desired frequency band will be determined by external components shown in the application circuit.

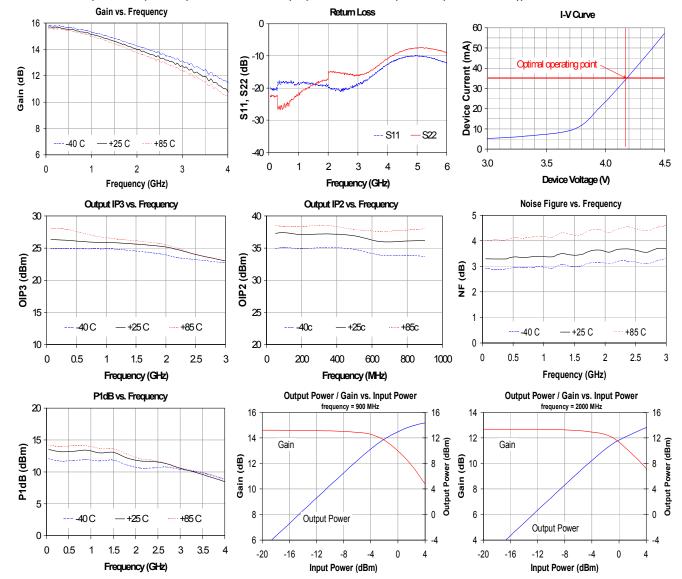




#### **Typical Device RF Performance (cont'd)**

Supply Bias = +6 V,  $R_{bias}$  = 51  $\Omega$ ,  $I_{cc}$  = 35 mA

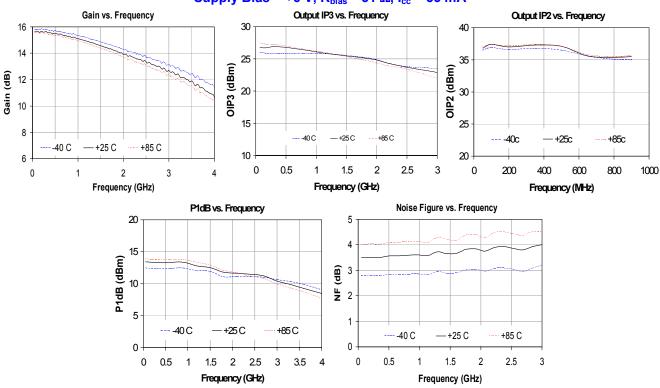


#### **Typical Device RF Performance**

Supply Bias = +8 V,  $R_{bias}$  = 108  $\Omega$ ,  $I_{cc}$  = 35 mA

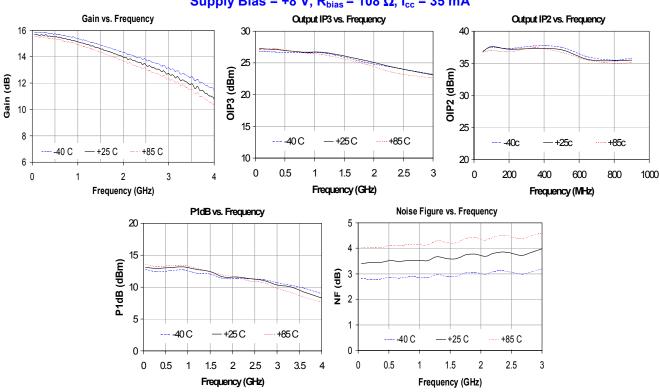





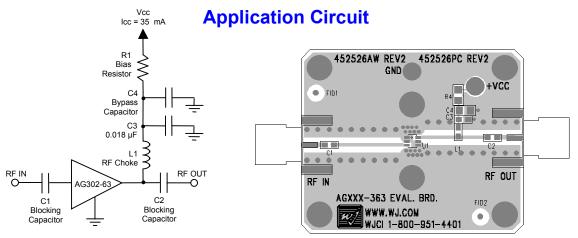

Recommended Component Values

Reference		Frequency (MHz)							
Designator	50	500	900	1900	2200	2500	3500		
L1	820 nH	220 nH	68 nH	27 nH	22 nH	18 nH	15 nH		
C1, C2, C4	.018 μF	1000 pF	100 pF	68 pF	68 pF	56 pF	39 pF		

- 1. The proper values for the components are dependent upon the intended frequency of operation.
- 2. The following values are contained on the evaluation board to achieve optimal broadband performance:

Ref. Desig.	Value / Type	Size
L1	39 nH wirewound inductor	0603
C1, C2	56 pF chip capacitor	0603
C3	0.018 μF chip capacitor	0603
C4	Do Not Place	
R1	22.1 Ω 1% tolerance	0805

Recommended Bias Resistor Values

S upply Voltage	R1 value	Size
5 V	22.1 ohms	0603
6 V	51 ohms	0805
7 V	80 ohms	1206
8 V	108 ohms	1210
9 V	137 ohms	1210
10 V	166 ohms	1210
12 V	223 ohms	2010

The proper value for R1 is dependent upon the supply voltage and allows for bias stability over temperature. WJ recommends a minimum supply bias of +5 V. A 1% tolerance resistor is recommended.

#### **Typical Device Data**

S-Parameters ( $V_{device} = +4.23 \text{ V}$ ,  $I_{CC} = 35 \text{ mA}$ ,  $T = 25^{\circ}\text{C}$ , calibrated to device leads)


		2	device	.,-(( ======,	,		e reads)	
Freq (MHz)	S11 (dB)	S11 (ang)	S21 (dB)	S21 (ang)	S12 (dB)	S12 (ang)	S22 (dB)	S22 (ang)
50	-19.85	-177.05	15.79	177.89	-19.50	1.85	-22.57	-9.39
250	-19.98	175.72	15.72	170.42	-19.97	1.77	-22.62	-20.70
500	-18.01	168.09	15.61	160.75	-19.89	-1.49	-25.70	-57.42
750	-18.03	161.31	15.46	151.46	-19.75	-0.83	-23.67	-81.31
1000	-18.40	155.28	15.23	142.64	-20.03	-5.40	-21.92	-97.33
1250	-18.41	151.47	15.04	133.43	-19.57	-3.15	-20.29	-113.22
1500	-18.66	151.02	14.72	124.92	-19.70	-3.55	-19.00	-123.83
1750	-19.00	148.77	14.42	116.42	-19.61	-2.45	-17.99	-133.36
2000	-19.53	143.58	14.09	108.45	-19.21	-4.88	-17.12	-142.08
2250	-20.76	113.17	13.77	100.67	-19.05	-5.29	-15.05	-130.60
2500	-20.87	111.03	13.52	95.18	-19.25	-9.57	-15.35	-142.08
2750	-19.68	123.77	13.23	87.31	-18.88	-8.74	-15.64	-156.85
3000	-19.28	129.86	12.90	79.66	-18.52	-7.78	-15.96	-175.61
3250	-17.79	131.49	12.55	72.44	-18.46	-10.45	-15.54	163.89
3500	-15.90	129.32	12.20	64.86	-18.38	-12.94	-14.38	142.50
3750	-14.24	123.22	11.76	57.50	-18.15	-16.94	-12.52	126.50
4000	-12.67	119.37	11.34	49.91	-17.95	-17.17	-10.93	117.72
4250	-11.41	115.92	10.89	43.03	-17.83	-21.16	-9.42	109.93
4500	-10.59	112.56	10.41	36.71	-17.67	-22.91	-8.57	104.82
4750	-10.10	109.83	9.99	30.18	-17.43	-25.99	-7.86	102.35
5000	-9.85	106.48	9.64	24.37	-17.45	-26.81	-7.45	102.33
5250	-10.24	105.44	9.33	19.39	-17.45	-29.65	-7.63	102.18
5500	-10.79	104.94	9.06	14.78	-16.94	-30.74	-7.77	103.04
5750	-11.50	106.52	8.93	9.92	-16.70	-31.15	-8.37	104.38
6000	-12.41	105.88	8.77	4.74	-16.46	-33.40	-9.03	103.86


Device S-parameters are available for download on the website at: <a href="http://www.wj.com">http://www.wj.com</a>

#### AG302-63 (SOT-363 Package) Mechanical Information

This package may contain lead-bearing materials. The plating material on the leads is SnPt

#### **Outline Drawing**






3

(e)

**Land Patte** 



- NOTES:
   DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1194. PACKAGE CONFORMS TO JEDEC MO-203, ISSUE 8.
- (3) DIMENSION D DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
  MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.15 mm PET
  END, DIMENSION ET 10055 NOT INCLUDE INTERLEAD FLASH OR PROTRUSION,
  INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.15 mm PER SIDE.
  D AND ET DIMENSIONS ARE DETERMINED AT DATUM H.
- [4] THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM, DMEMSIONS D AND EL RARE DETERMINED AT THE OUTERNOST EXTREME OF THE PLASTIC BOOY EXCLUSIVE OF MOLD PLAST, TE BAR BURRS, GATE BURRS AND INTERTED FLASH, BUT INCLUDING ANY MISMATCH BUTWEEN THE TOP AND THE BOTTOM OF THE PLASTIC BOOY, D. AND ET DIMENSIONS ARE CETERMINED.

# The compositil be maded

The composition will be marked with "" designator followed " ovo-distributions of the way and the top reprint the top reprint the composition of the way and the way and

on the obsite (the Application

### SL SD Rating

Con! ESD sensitive device.

Class 0
/all Passes at 150 V
Human Body Model (HBM)

JEDEC Standard JESD22-A114

SD Rating: Class II
Yalue: Passes at 250 V

Test: Charged Device Model (CDM) Standard: JEDEC Standard JESD22-C101

MSL Rating: Level 1

Standard: JEDEC Standard J-STD-020

#### **Mounting Config. Notes**

- Ground / thermal vias are critical for the proper performance of this device. Vias should use a .35mm (#80 / .0135") diameter drill and have a final plated thru diameter of .25 mm (.010").
- Add as much copper as possible to inner and outer layers near the part to ensure optimal thermal performance.
- Mounting screws can be added near the part to fasten the board to a heatsink. Ensure that the ground / thermal via region contacts the heatsink.
- Do not put solder mask on the backside of the PC board in the region where the board contacts the heatsink.
- RF trace width depends upon the PC board material and construction.
- Use 1 oz. Copper minimum.
- 7. All dimensions are in millimeters (inches). Angles are in degrees

#### Therm? Cife Nions


Operating Temperature to +85°C

The De Resistance of 10 25° C/W

The Temperature of 10 25° C/W

he jung (14) the grown (nin 4)

of the junction the archive in (pin 4).
This combonds (2) Applical biasing condition of 4.23 (3.5 mA) 85°C case temperature. A minimum MTTF (10) million hours is achieved for a second temper (2) below 177°C.




Specifications and information are subject to change without notice





#### AG302-63G (Green / Lead-free SOT-363 Package) Mechanical Information

This package is lead-free/Green/RoHS-compliant. It is compatible with both lead-free (maximum 260°C reflow temperature) and leaded (maximum 245°C reflow temperature) soldering processes. The plating material on the leads is annealed matte tin over copper.

#### **Outline Drawing**







- AL SIDE VIEW SIANG PLANE
- NOTES:


  1. DIMENSIONS AND TOLERANCING PER ASME Y14,5M-1194, PACKAGE CONFORMS
  TO JEDIC MO-203, ISSUE B.
  2. DIMENSIONS AND IN JUSTIFIED (MICHIEL)
- DIMENSIONS ARE IN MILLIPERSY (INCHES).

  MILD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCED 0.15 mm PE END, DIMENSION ET DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION.
- THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM, MICHIGONS D AND ET ARE DETERMINED AT THE CUTERMOST EXTREMES OF THE PLASTIC BODY SEXULUSIVE OF MAD FLASH, TE BURNES, AND INTEREAD FLASH, BUT REQUIRED ANY MISMATCH BETWEEN THE FOR AND THE BURNES, AND INTEREAD FLASH, BUT REQUIRED ANY MISMATCH BETWEEN THE FOR AND THE BURNES AND THE BURNES AND THE BURNES AND THE BURNES.
- (5) DATUM A & B TO BE DETERMINED AT DATUM H.

TOP VIEW

(6) DIMENSION 'S DOES NOT INCLUDE DAMBAR PROTRUSION, ALLOWABE OAMBAR PROTRUSION, SHALL BE, 0.08 mm TOTAL, N. EXCESS OF THE 'D DAMBARON AT MAXIMUM ANTERNAL CONDITION, THE DAMBAR IS NOT LOCATED ON THE LOWER RADIUS OF THE FOOT. WINNING SPACE BETWEEN PROTRUSION, ARO AN ADJACENT LEAD SHALL NO BE LESS THAN 0.07 mm.


#### **Land Pattern**



#### **Thermal Specifications**

Parameter	Rating
Operating Case Temperature	-40 to +85°C
Thermal Resistance, Rth (1)	325° C/W
Junction Temperature, Tjc (2)	133° C

- The thermal resistance is referenced from the hottest part of the junction to the ground pin (pin 4).
- This corresponds to the typical biasing condition of +4.23V, 35 mA at an 85°C case temperature. A minimum MTTF of 1 million hours is achieved for junction temperatures below 177 °C.



#### **Product Marking**

The component will be marked with an "I" designator followed by a two-digit numeric lot code on the top surface of the package.

Tape and reel specifications for this part are located on the website in the "Application Notes" section.

#### **MSL / ESD Rating**



Caution! ESD sensitive device.

ESD Rating: Class 1C

Value: Passes at 1000 V min.
Test: Human Body Model (HBM)
Standard: JEDEC Standard JESD22-A114

ESD Rating: Class IV

Value: Passes at 1000 V min.

Test: Charged Device Model (CDM)
Standard: JEDEC Standard JESD22-C101

MSL Rating: Level 3

Standard: JEDEC Standard J-STD-020

#### **Mounting Config. Notes**

- Ground / thermal vias are critical for the proper performance of this device. Vias should use a .35mm (#80 / .0135") diameter drill and have a final plated thru diameter of .25 mm (.010")
- Add as much copper as possible to inner and outer layers near the part to ensure optimal thermal performance.
   Mounting screws can be added near the part to fasten the
- Mounting screws can be added near the part to fasten the board to a heatsink. Ensure that the ground / thermal via region contacts the heatsink.
- Do not put solder mask on the backside of the PC board in the region where the board contacts the heatsink.
- RF trace width depends upon the PC board material and construction.
- Use 1 oz. Copper minimum.
- All dimensions are in millimeters (inches). Angles are in degrees.

Specifications and information are subject to change without notice