

# D44H8 D44H11

# NPN SILICON POWER TRANSISTORS

- STMicroelectronics PREFERRED SALESTYPES
- LOW COLLECTOR-EMITTER SATURATION VOLTAGE
- FAST SWITCHING SPEED

## APPLICATIONS


- GENERAL PURPOSE SWITCHING
- GENERAL PURPOSE AMPLIFIER


#### DESCRIPTION

The D44H8, and D44H11 are silicon Multiepitaxial Planar NPN transistors mounted in Jedec TO-220 plastic package.

They are inteded for various switching and general purpose applications.

D44H8, D44H11 are complementary with D45H8, D45H11.





#### **ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Va	Unit	
		D44H8	D44H11	
VCEO	Collector-Emitter Voltage (I <sub>B</sub> = 0)	60	80	V
$V_{\text{EBO}}$	Emitter-Base Voltage $(I_C = 0)$	5		V
Ι <sub>C</sub>	Collector Current	10		Α
I <sub>CM</sub>	Collector Peak Current 20		Α	
Ptot	Total Dissipation at $T_c \le 25$ °C	50		W
T <sub>stg</sub>	Storage Temperature	-65 t	o 150	°C
Tj	Max. Operating Junction Temperature 150		°C	

### THERMAL DATA


R <sub>thj-case</sub> Thermal Re	sistance Junction-case	Мах	2.5	°C/W	
----------------------------------	------------------------	-----	-----	------	--

## **ELECTRICAL CHARACTERISTICS** ( $T_{case} = 25 \,^{\circ}C$ unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
I <sub>CBO</sub>	Collector Cut-off Current (I <sub>E</sub> = 0)	$V_{CB}$ = rated $V_{CEO}$			10	μA
I <sub>EBO</sub>	Emitter Cut-off Current $(I_C = 0)$	$V_{EB} = 5V$			100	μA
V <sub>CEO(sus)</sub> *	Collector-Emitter Sustaining Voltage	I <sub>C</sub> = 100 mA for <b>D44H8</b> for <b>D44H11</b>	60 80			V V
V <sub>CE(sat)</sub> *	Collector-Emitter Saturation Voltage	I <sub>C</sub> = 8 A I <sub>B</sub> = 0.4 A			1	V
V <sub>BE(sat)</sub> *	Base-Emitter Saturation Voltage	$I_{\rm C} = 8 \ {\rm A}$ $I_{\rm B} = 0.8 \ {\rm A}$			1.5	V
h <sub>FE</sub> *	DC Current Gain	Ic = 2 A Vce = 1 V Ic = 4 A Vce = 1 V	60 40			

\* Pulsed: Pulse duration = 300  $\mu$ s, duty cycle  $\leq$  2 %


## Safe Operating Area




**Derating Curves** 




## DC Current Gain





Collector-Emitter Saturation Voltage



## DC Current Gain








57

## D44H8/D44H11

DIM.		mm		inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
А	4.40		4.60	0.173		0.181
С	1.23		1.32	0.048		0.052
D	2.40		2.72	0.094		0.107
Е	0.49		0.70	0.019		0.027
F	0.61		0.88	0.024		0.034
F1	1.14		1.70	0.044		0.067
F2	1.14		1.70	0.044		0.067
G	4.95		5.15	0.194		0.202
G1	2.40		2.70	0.094		0.106
H2	10.00		10.40	0.394		0.409
L2		16.40			0.645	
L4	13.00		14.00	0.511		0.551
L5	2.65		2.95	0.104		0.116
L6	15.25		15.75	0.600		0.620
L7	6.20		6.60	0.244		0.260
L9	3.50		3.93	0.137		0.154
Μ		2.60			0.102	



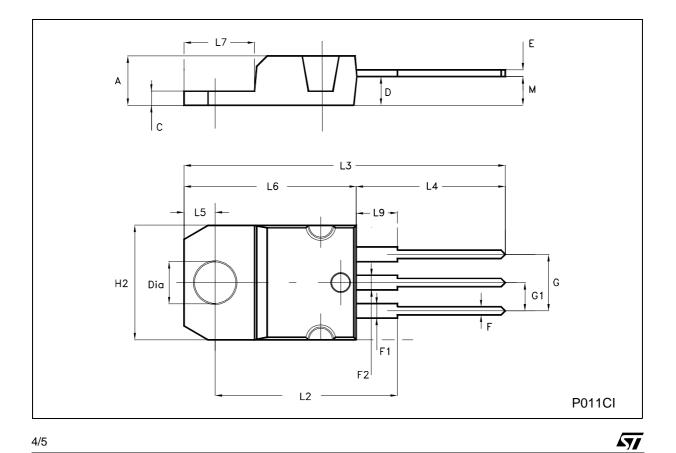

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics. The ST logo is a trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco -Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

http://www.st.com

57