

BAT42WS / BAT43WS


SURFACE MOUNT SCHOTTKY BARRIER DIODE

Features

Low Forward Voltage Drop Fast Switching Ultra-Small Surface Mount Package Lead Free/RoHS Compliant (Note 3)

Mechanical Data

Case: SOD-323 Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 Moisture Sensitivity: Level 1 per J-STD-020C Leads: Solderable per MIL-STD-202, Method 208 Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe). BAT42WS Marking: S7 BAT43WS Marking: S7 BAT43WS Marking: S8 Polarity: Cathode Band Weight: 0.004 grams (approx.)



SOD-323			
Dim	Min	Max	
Α	2.30	2.70	
В	1.60 1.80		
С	1.20 1.40		
D	1.05 Typical		
Е	0.25	0.35	
G	0.20 0.40		
Н	0.10 0.15		
J	0.05 Typical		
	0	8	
All Dimensions in mm			

Maximum Rati	1gs @ T _A = 25 C unless	otherwise specified
--------------	---	---------------------

Characteristic	Symbol	BAT42WS / BAT43WS	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	30	V
RMS Reverse Voltage	V _{R(RMS)}	21	V
Forward Continuous Current (Note 1)	I _{FM}	200	mA
Repetitive Peak Forward Current (Note 1) @ t < 1.0s	I _{FRM}	500	mA
Non-Repetitive Peak Forward Surge Current @ t < 10ms	I _{FSM}	4.0	А
Power Dissipation (Note 1)	Pd	200	mW
Thermal Resistance Junction to Ambient Air (Note 1)	R _{JA}	625	C/W
Operating and Storage Temperature Range	T_{j} , T_{STG}	-55 to +125	С

Pb

Electrical Characteristics @ T_A = 25 C unless otherwise specified


Characteristic		Symbol	Min	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 2)		V _{(BR)R}	30		V	I _R = 100 A
Forward Voltage Drop	Both Types BAT42WS BAT42WS BAT43WS BAT43WS	V _F	0.26	1.0 0.40 0.65 0.33 0.45	V	$ \begin{array}{l} I_F = 200 \text{mA} \\ I_F = 10 \text{mA} \\ I_F = 50 \text{mA} \\ I_F = 2.0 \text{mA} \\ I_F = 15 \text{mA} \end{array} $
Reverse Current (Note 2)		I _R		500 100	nA A	$V_{R} = 25V$ $V_{R} = 25V, T_{j} = 100 C$
Total Capacitance		CT		10	pF	V _R = 1.0, f = 1.0MHz
Reverse Recovery Time		t _{rr}		5.0	ns	$I_F = I_R = 10mA,$ $I_{rr} = 0.1 \text{ x } I_R, R_L = 100$

Notes: 1. Part mounted on FR4 PC Board with recommended pad layout, which can be found on our website

at http://www.diodes.com/datasheets/ap02001.pdf.

2. Short duration test pulse used to minimize self-heating effect.

3. No purposefully added lead.

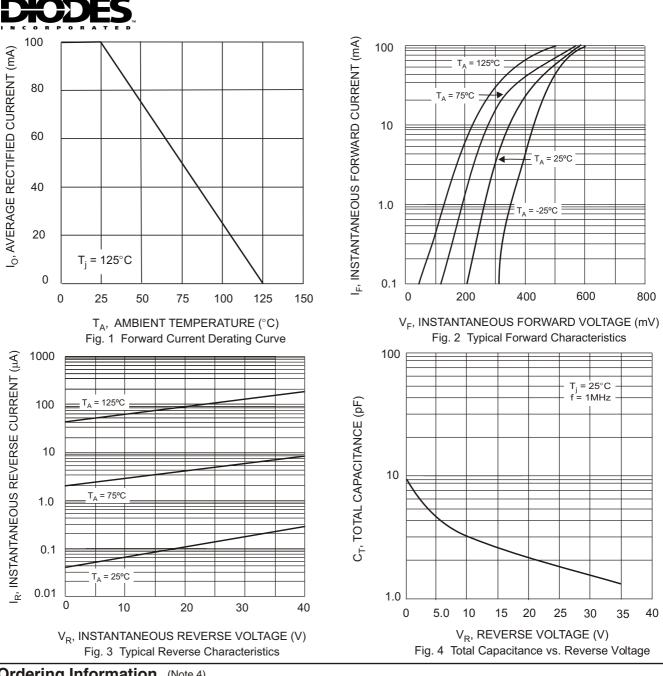


Ordering Information (Note 4)

Device	Packaging	Shipping
BAT42WS-7-F BAT43WS-7-F	SOD-323	3000/Tape & Reel

Notes: 4. For Packaging Details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.

Marking Information





IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.