


Chip tantalum capacitors (Bottom surface electrode type : Large capacitance)


TCT Series AS Case

Features (AS)

- 1) Vital for all hybrid integrated circuits board application.
- 2) Wide capacitance range.
- 3) Screening by thermal shock.

•Dimensions (Unit : mm)

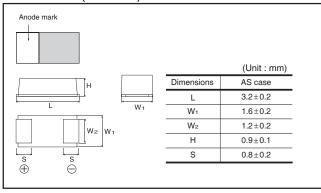

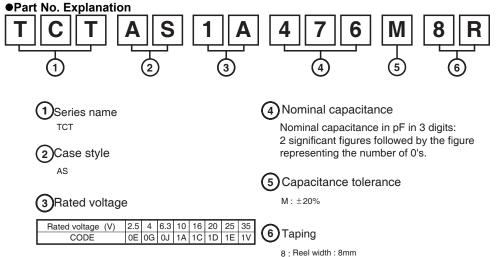

R : Positive electrode on the side opposite to sprocket hole

• Rated table

(μF)			Ra	ated volt	age (V,D)C)		
(μι)	2.5	4	6.3	10	16	20	25	35
1.0 (105)								AS
1.5 (155)								AS *
2.2 (225)								AS *
3.3 (335)							AS *	
4.7 (475)							AS	
6.8 (685)						AS *		
10 (106)						AS		
15 (156)					AS *			
22 (226)					AS			
33 (336)				AS				
47 (476)			AS	AS				
68 (686)			AS*					
100 (107)		AS	AS					
150 (157)		AS*						
220 (227)	AS *	AS						

* Under development

Marking

The indications listed below should be given on the surface of a capacitor.

(1) Polarity : The polarity should be shown by □ bar. (on the anode side)
(2) Rated DC voltage : Due to the small size of AS case, a voltage code is used as shown below.
(3) Visual typical example (1) voltage code (2) capacitance code

Voltage Code	Rated DC Voltage (V)	
е	2.5	
g	4	
j	6.3	
А	10	
С	16	
D	20	
Е	25	
V	35	

Capacitance Code	Nominal Capacitance (µF)			
A	1.0			
E	1.5			
J	2.2			
Ν	3.3			
S	4.7			
W	6.8			
а	10			
е	15			
j	22			
n	33			
S	47			
w	68			
ā	100			
ē	150			
j	220			

[AS case]

note 1)

 $\frac{A}{(1)}$ $\frac{s}{(2)}$



\ manufacture code note 2) voltage code and capacitance code are variable with parts number

• Characteristics

Iter	n					Pe	rforr	nan	се		Т	Fest o	cond	ditions (based	on JIS C 5101-	1 and JIS C 5101-3
Operating Temp		-5	5°C	to +	125	°C					V	/olta	ge r	eduction wher	n temperature ex	ceeds +85°C
Maximum operat temperature with derating	ting I no voltage	+8	5°C													
Rated voltage (VDC)	2.5	4	6.3	10	16	20	25	3	5	a	at 85°	°C			
Category voltag	je (VDC)	1.6	2.5	4	6.3	10	13	16	2	2	a	at 12	5°C			
Surge voltage (VDC)	3.2	3.2 5.0 8 13 20 26 32 44		a	at 85°	°C									
DC Leakage cu	rrent	Shall be satisfied the voltage on " Standard list "				A	As per 4.9 JIS C 5101-1 As per 4.5.1 JIS C 5101-3 Voltage : Rated voltage for 5min									
Capacitance tolerance Shall be satisfied allowance range. ±20%				A N N	As per 4.7 JIS C 5101-1 As per 4.5.2 JIS C 5101-3 Measuring frequency : 120±12Hz Measuring voltage : 0.5Vrms +1.5 to 2V.DC Measuring circuit : DC Equivalent series circuit											
Tangent of loss (Df, tan δ)	angle	Shall be satisfied the voltage on " Standard list "				A N N	As per 4.8 JIS C 5101-1 As per 4.5.3 JIS C 5101-3 Measuring frequency : 120±12Hz Measuring voltage : 0.5Vrms +1.5 to 2V.DC Measuring circuit : DC Equivalent series circuit									
Impedance		Shall be satisfied the voltage on " Standard list "			A N N	As per 4.10 JIS C 5101-1 As per 4.5.4 JIS C 5101-3 Measuring frequency : 100±10kHz Measuring voltage : 0.5Vrms or less Measuring circuit : DC Equivalent series circuit			eries circuit							
Resistance to Soldering heat	Appearance		There should be no significant abnormality. The indications should be clear.				A	As per 4.14 JIS C 5101-1 As per 4.6 JIS C 5101-3								
	L.C.	Le	ss th	nan	2009	% o	f initi	al liı	mit	t		Dip in the solder bath Solder temp : 260±10°C				
	ΔC / C	AS	60G2	227	: Wit	hin	+20/ +20/ % of	/-30	%	of i	lue F A					
	Df (tan δ)	Le	ss th	nan :	2009	% 0	f initi	al lii	mit	t						
Temperature cycle	Appearance						o sig ould				Á	As per 4.16 JIS C 5101-1 As per 4.10 JIS C 5101-3				
	L.C.	Le	ss th	nan	2009	% 0	f initi	al liı	mit	t				n : 5 cycles steps 1 to 4) v	without discontin	uation
	ΔC/C	AS0E227 : Within ±30% of initial value					``]		Temp.	Time					
							±30					ŀ	1	-55±3°C	30±3min.	
		Oti	ners	:vvit	nin -	£20	% of	Initi	iai	val		ŀ	2	Room temp.	3min. or less	
	Df (tan δ)	Le	ss th	nan :	2009	% 0	f initi	al lii	mit	t		ŀ	3	125±2°C	30±3min.	
												ľ	4	Room temp.	3min. or less	
															ave it at room te sure the sample	
Moisture resistance	Appearance	There should be no significant abnormality. The indications should be clear.			Â	As per 4.22 JIS C 5101-1 As per 4.12 JIS C 5101-3										
	L.C.	Le	ss th	nan	2009	% 0	f initi	al lii	mit	t		After leaving the sample under such atmospheric condition that the temperature and humidity are				
	ΔC / C	Wi	thin	±20	% of	f ini	tial v	alue	e						RH, respectively	
	Df (tan δ)	AS AS	0E2	27 :	Les : Les	s th ss th	nan 3 nan 3 2009	300%	% 0%	of ir	it te	 leave it at room temperature for over 24h and then measure the sample. 				

Iter	n	Performance	Test conditions (based on JIS C 5101-1 and JIS C 5101-3)
Temperature	Temp.	–55°C	As per 4.29 JIS C 5101-1
Stability	ΔC / C	AS0E227 : Within 0/-20% of initial value AS0G227 : Within 0/-20% of initial value Others:Within 0/-15% of initial value	As per 4.13 JIS C 5101-3
	Df (tan δ)	Shall be satisfied the voltage on " Standard list "	
	L.C.	_	
	Temp.	+85°C	
	ΔC / C	Within +15/0% of initial value	
	Df (tan δ)	Shall be satisfied the voltage on " Standard list "	
	L.C.	Less than 1000% of initial limit	
	Temp.	+125°C	
	ΔC / C	Within +20/0% of initial value	
	Df (tan δ)	Shall be satisfied the voltage on " Standard list "	
	L.C.	Less than 1250% of initial limit	
Surge voltage	Appearance	There should be no significant abnormality.	As per 4.26JIS C 5101-1
	L.C.	Less than 200% of initial value	As per 4.14JIS C 5101-3 Apply the specified surge voltage via the serial resistance of
	ΔC / C	Within ±20% of initial value	1kΩ every 5±0.5 min. for 30±5 s. each time in the atmospheric condition of $85\pm2^{\circ}$ C.
	Df (tan δ)	Less than 200% of initial limit	Repeat this procedure 1,000 times. After the specimens, leave it at room temperature for over 24h and then measure the sample.
Loading at	Appearance	There should be no significant abnormality.	As per 4.23 JIS C 5101-1
High temperature	L.C.	Less than 200% of initial limit	As per 4.15 JIS C 5101-3 After applying the rated voltage for 1000+36/0 h without
	ΔC / C	AS0E227 : Within +20/-30% of initial value AS0G227 : Within +20/-30% of initial value Others:Within ±20% of initial value	discontinuation via the serial resistance of 3Ω or less at a temperature of $85\pm2^{\circ}$ C, leave the sample at room temperature / humidity for over 24h and measure the value.
	Df (tan δ)	AS0E227 : Less than 300% of initial limit AS0G227 : Less than 300% of initial limit Others:Less than 200% of initial limit	
Terminal	Capacitance	The measured value should be stable.	As per 4.35 JIS C 5101-1
strength	Appearance	There should be no significant abnormality.	As per 4.9 JIS C 5101-3 A force is applied to the terminal until it bends to 1mm and by a prescribed tool maintain the condition for 5s. (See the figure below) (Unit : mm) 50 + 20 + 10 + 10 + 10 + 10 + 10 + 10 + 1

lt	em	Performance	Test conditions (JIS C 5101–1 and JIS C 5101–3)			
Adhesiven	ess	The terminal should not come off.	As per 4.34 JIS C 5101-1 As per 4.8 JIS C 5101-3 Apply force of 5N in the two directions shown in the figure below for 10±1s after mounting the terminal on a circuit board			
			Apply force a circuit board			
Dimensions Refer to		Refer to "External dimensions"	Measure using a caliper of JIS B 7507 Class 2 or higher grade.			
Resistance to solvents		The indication should be clear	As per 4.32 JIS C 5101-1 As per 4.18 JIS C 5101-3 Dip in the isopropyl alcohol for 30±5s, at room temperature.			
Solderabili	ty	3/4 or more surface area of the solder coated terminal dipped in the soldering bath should be covered with the new solder.	As per 4.15.2 JIS C 5101-1 As per 4.7 JIS C 5101-3 Dip speed=25±2.5mm / s Pre-treatment (accelerated aging): Leave the sample on the boiling distilled water for 1 h. Solder temp.: 245±5°C Duration : 3±0.5s Solder : M705 Flux : Rosin 25% IPA 75%			
Vibration	Vibration Capacitance Measure value should not fluctuate during measurement.		As per 4.17 JIS C 5101-1 Frequency : 10 to 55 to 10Hz/min. Amplitude : 1.5mm			
	Appearance	There should be no significant abnormality.	Time : 2h each in X and Y directions Mounting : The terminal is soldered on a print circuit board.			


• Standard products list, TCT series AS Case

Part No.	Rated voltage 85°C	Category voltage 125°C	Surge voltage 85°C	Cap. 120Hz	Tolerance	Leakage current 25°C	lo	ingent ss ang 120Hz (%)	le	Impedance 100kHz
	(V)	(V)	(V)	(μF)	(%)	1WV.5min (µA)	-55°C	25°C 85°C	125°C	(Ω)
* TCT AS 0E 227M8R	2.5	1.6	3.2	220	±20	27.5	35	20	25	2.5
TCT AS 0G 107M8R	4	2.5	5	100	±20	20	35	20	25	3
* TCT AS 0G 157M8R	4	2.5	5	150	±20	30	35	20	25	2.7
TCT AS 0G 227M8R	4	2.5	5	220	±20	88	80	30	40	2.5
TCT AS 0J 476M8R	6.3	4	8	47	±20	6	35	20	25	4
* TCT AS 0J 686M8R	6.3	4	8	68	±20	21.5	35	20	25	4
TCT AS 0J 107M8R	6.3	4	8	100	±20	31.5	34	18	24	3
TCT AS 1A 336M8R	10	6.3	13	33	±20	6.6	30	15	20	4
TCT AS 1A 476M8R	10	6.3	13	47	±20	9.4	35	20	25	4
* TCT AS 1C 156M8R	16	10	20	15	±20	4.8	30	15	20	4
TCT AS 1C 226M8R	16	10	20	22	±20	7.1	35	20	25	4
* TCT AS 1D 685M8R	20	13	26	6.8	±20	2.8	30	15	20	8
TCT AS 1D 106M8R	20	13	26	10	±20	4	30	15	20	4
* TCT AS 1E 335M8R	25	16	32	3.3	±20	1.7	30	15	20	8
TCT AS 1E 475M8R	25	16	32	4.7	±20	2.4	30	15	20	8
TCT AS 1V 105M8R	35	22	44	1	±20	0.7	30	15	20	8
* TCT AS 1V 155M8R	35	22	44	1.5	±20	1.1	30	15	20	8
* TCT AS 1V 225M8R	35	22	44	2.2	±20	1.6	30	15	20	8

*=Under development


• Packaging specifications

e i dona;	ging op	oomout		(Unit : mm)
Case code	A <u>+</u> 0.1	B <u>+</u> 0.1	t1 <u>+</u> 0.05	t2 <u>+</u> 0.1
AS	1.9	3.5	0.25	1.1

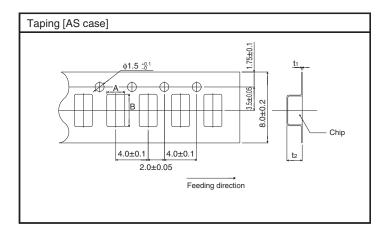

• Packaging style

Case code	Packaging	Packag	ging style	Symbol	Basic ordering units
AS case	Taping	plastic taping	¢180mm Reel	R	3,000pcs

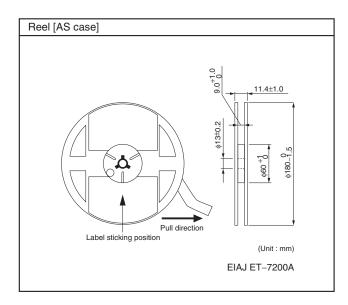

	g or reproduction of this document, in part or in whole, is permitted without the ROHM Co.,Ltd.
The conter	nt specified herein is subject to change for improvement without notice.
"Products	nt specified herein is for the purpose of introducing ROHM's products (hereinafte '). If you wish to use any such Product, please be sure to refer to the specifications be obtained from ROHM upon request.
illustrate th	of application circuits, circuit constants and any other information contained herein the standard usage and operations of the Products. The peripheral conditions mus to account when designing circuits for mass production.
However,	was taken in ensuring the accuracy of the information specified in this document should you incur any damage arising from any inaccuracy or misprint of such n, ROHM shall bear no responsibility for such damage.
examples implicitly, a other parti	cal information specified herein is intended only to show the typical functions of and of application circuits for the Products. ROHM does not grant you, explicitly o any license to use or exercise intellectual property or other rights held by ROHM and es. ROHM shall bear no responsibility whatsoever for any dispute arising from the h technical information.
equipment	cts specified in this document are intended to be used with general-use electroni- c or devices (such as audio visual equipment, office-automation equipment, commu evices, electronic appliances and amusement devices).
The Produ	cts specified in this document are not designed to be radiation tolerant.
	HM always makes efforts to enhance the quality and reliability of its Products, a ay fail or malfunction for a variety of reasons.
against the failure of a shall bear	sure to implement in your equipment using the Products safety measures to guard e possibility of physical injury, fire or any other damage caused in the event of the ny Product, such as derating, redundancy, fire control and fail-safe designs. ROHM no responsibility whatsoever for your use of any Product outside of the prescribed ot in accordance with the instruction manual.
system wh may result instrument controller of the Pro	icts are not designed or manufactured to be used with any equipment, device of hich requires an extremely high level of reliability the failure or malfunction of which in a direct threat to human life or create a risk of human injury (such as a medica c, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel- or other safety device). ROHM shall bear no responsibility in any way for use of an ducts for the above special purposes. If a Product is intended to be used for an ial purpose, please contact a ROHM sales representative before purchasing.
be control	nd to export or ship overseas any Product or technology specified herein that ma led under the Foreign Exchange and the Foreign Trade Law, you will be required to cense or permit under the Law.



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/