


# **SERIES 75**

0.3" Diameter, 200 mA




#### **FEATURES**

- Small Size
- Flush, Shafted, or Knobbed Shaft




## **DIMENSIONS** In inches (and millimeters)

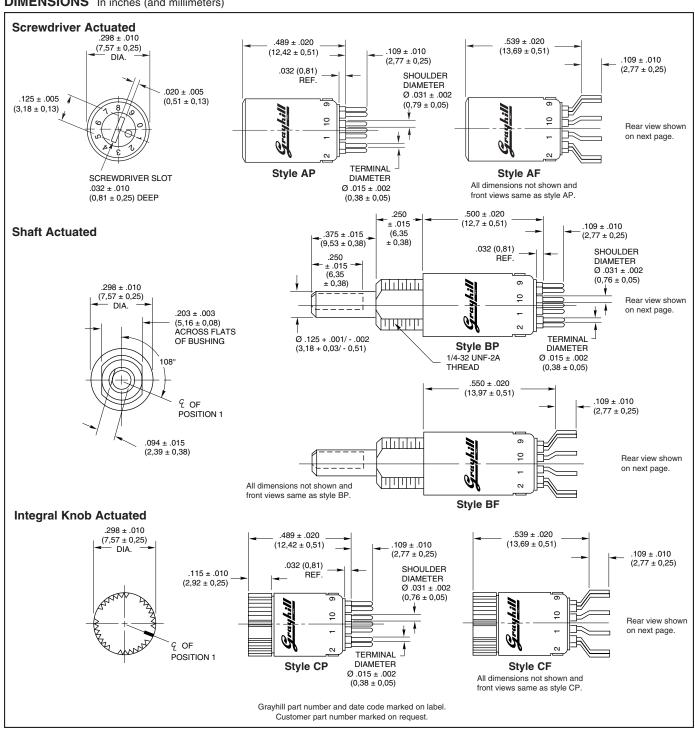




#### **CIRCUIT DIAGRAMS AND REAR VIEWS**

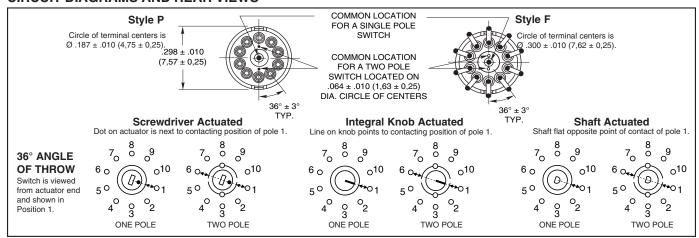

# SPECIFICATIONS Electrical Ratings

Chart shown for non-shorting (break before make) contacts, resistive load.



One cycle is 360° rotation and a return through all switch positions to the starting position. The data for the curve was measured at sea level, 25°C and 68% relative humidity with the following limiting criteria:

**Contact Resistance:** 50 milliohms maximum (15 milliohms initially).

**Insulation Resistance:** 10,000 Mohms minimum between mutually insulated parts.

Voltage Breakdown: 500 Vac between mutually insulated parts.

**Life Expectancy:** 10,000 cycles at 200 milliamps. One cycle is 360° rotation and a return through all switch positions to the starting position.

Low Level Rating: Make and break a 50 mV, 1 milliamp, resistive load for 10,000 cycles with a maximum contact resistance of 50 milliohms.

Contact Grayhill for information if the life limiting criteria is more critical than those listed, if the required cycles of operation are greater than those listed, if a larger make and break current is required than the one listed for the desired number of cycles, or if elevated temperatures or reduced pressures are part of the operating environment.

# **Materials and Finishes**

Switch Base: Diallyl per MIL-M-14
Detent Cover and Detent Rotor in Styles AP,
AF, BP, and BF: Phenolic per MIL-M-14
Bushing: Brass, tin zinc plating

**Stop Pin:** Stainless steel, passivated **Detent Balls:** Steel, nickel-plated

**Detent and Contact Springs:** Tinned music

wire

Rotor Contact: Silver cad-oxide, gold-plated Terminals and Common: Brass, gold plate .00002" minimum thickness over silver plate .0003" minimum.

Shaft in Style BF or BP: Zinc Integral Knob and Detent Rotor in Style CF or

CP: Red Thermoplastic

Mounting Hardware for Style BF or BP: One mounting nut .062" thick by .312" across flats and one external tooth lockwasher supplied with each switch. Mounting nut is brass, zinc plated and lockwasher is spring steel.

## Additional Characteristics


**Contact Type:** Non-shorting, wiping contacts **Terminals:** Switches are provided with the full circle of terminals regardless of the number of active positions.

Stop Strength: 8 ounce-inches minimum

## **CHOICES AND LIMITATIONS**

Style and Des Ø 0.187 (4,75) Circle of Term.		esignation Ø 0.300 (7,62) Circle of Term.	Angle Of Throw	Stops	Terminal	Poles Per Deck	Numbe Shorting	r of Decks Non- Shorting	Number of Positions/Pole
BP =	Screwdriver Actuated Shaft Operated Integral Knob	AF = Screwdriver Actuated BF = Shaft Operated CF = Integral Knob	36°	Fixed	Printed	1 2	Not Available	1 1	2 thru 10 2 thru 5

# **ORDERING INFORMATION**

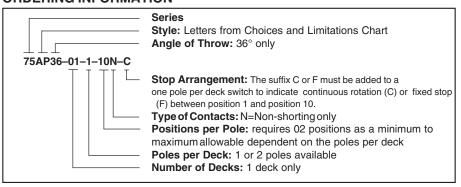

#### Available from your local Grayhill Distributor.

For prices and discounts, contact a local Sales Office, an authorized local Distributor, or Grayhill.