# **ULTRA LOW CAPACITANCE STEERING DIODE/TVS ARRAY**



### DESCRIPTION

The PLR0504F is subminiature, ultra low capacitance steering diode/TVS suppressor array designed for the protection of sensitive IC components from the damaging effects of Electrostatic Discharge (ESD) and Electrical Fast Transients (EFT). This device is ideally suited for use in portable electronics such as SMART phones, laptops, and other wireless devices as well as gigabit Ethernet applications.

The PLR0504F provides protection in accordance with IEC 61000-4-2 and IEC 61000-4-4 requirements. This device is available in a SC70-6L package configuration and is rated at 200 Watts peak pulse power  $(8/20\mu s)$  per line.

### **FEATURES**

- Compatible with IEC 61000-4-2 (ESD): Air 15kV, Contact 8kV
- Compatible with IEC 61000-4-4 (EFT): 40A, 5/50ns
- 200 Watts Peak Pulse Power per Line(tp = 8/20μs)
- ESD Protection > 25 kilovolts
- Protects 4 Data Lines
- Low Clamping Voltage
- Ultra Low Capacitance: 1.9pF Typical
- RoHS Compliant
- REACH Compliant


### **MECHANICAL CHARACTERISTICS**

- Molded JEDEC SC70-6L Package
- Approximate Weight: 7milligrams
- Lead-Free Nickel Paladium Gold Plating
- Solder Reflow Temperature: 260-270°C
- Flammability Rating UL 94V-0
- 8mm Tape and Reel per EIA Standard 481

### **APPLICATIONS**

- SMART Phones
- Portable Electronics
- · Gigabit Ethernet
- USB 2.0, DVI, & Video Card Interfaces

## PIN CONFIGURATION




## **TYPICAL DEVICE CHARACTERISTICS**

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified							
PARAMETER	SYMBOL	VALUE	UNITS				
Peak Pulse Power (tp = 8/20μs) - See Figure 1	P <sub>pp</sub>	200	Watts				
Operating Temperature	T <sub>L</sub>	-55 to 150	°C				
Storage Temperature	T <sub>stg</sub>	-55 to 150	°C				
Forward Surge Rating (1/120 seconds @ 25°C, I <sub>F</sub> = 10mA)	V <sub>F</sub>	1.5	Volts				


ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified								
PART NUMBER	DEVICE MARKING	RATED STAND-OFF VOLTAGE (Note 1)  V WM VOLTS	MINIMUM BREAKDOWN VOLTAGE (Note 1)  @ 1mA V(BR) VOLTS	MAXIMUM CLAMPING VOLTAGE (Fig. 2) (Note 1) @ I <sub>p</sub> = 1A V <sub>c</sub> VOLTS	MAXIMUM CLAMPING VOLTAGE (Fig. 2) (Note 1) @ I <sub>p</sub> = 5A V <sub>c</sub> VOLTS	MAXIMUM LEAKAGE CURRENT (Note 1)  @V WM I D HA	MAXIMUM CAPACITANCE (Note 1)  @0V, 1MHz C <sub>j(SD)</sub> pF	
PLR0504F	A5	5.0	6.0	15.0	25.0	3	1.9	


## NOTES

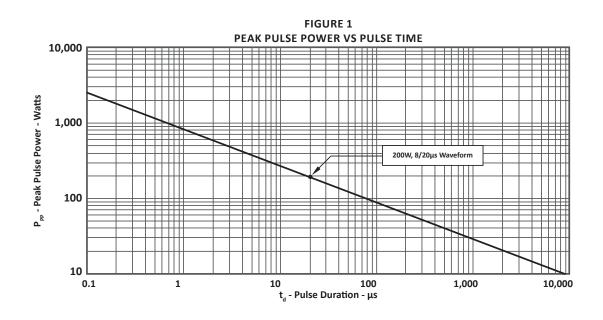


<sup>1.</sup> From I/O pin to ground.

## **TYPICAL DEVICE CHARACTERISTICS**

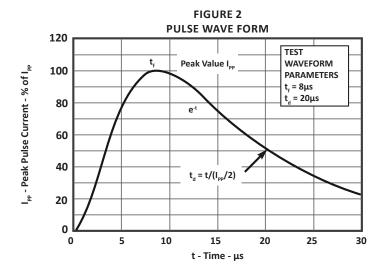

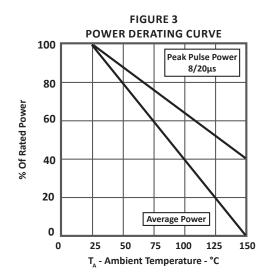

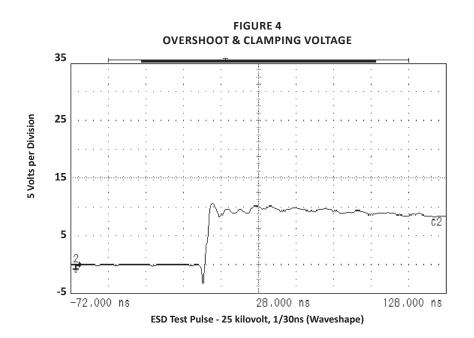






## **SC70-6L PACKAGE INFORMATION**

OUTLINE DIMENSIONS								
DIM	MILLIN	IETERS	INCHES					
ווועו	MIN	MAX	MIN	MAX				
Α	1.90 2.15		0.074	0.084				
В	1.15 1.35		0.045	0.055				
С	0.80	1.00	0.031	0.040				
D	0.15	0.30	0.005	0.012				
Е	0.65	BSC	0.026 BSC					
F	1.30 BSC		0.051 BSC					
G	0.80	1.10	0.031	0.043				
J	0.08 0.25		0.003	0.010				
K	2.00 2.40		0.078	0.095				
L		- 0.10		0.004				
М	0.26 0.46		0.010	0.018				

### **NOTES**


- 1. Controlling dimension: inches.
- 2. Dimensioning and tolerances per ANSI Y14.5M, 1985.
- 3. Dimensions are exclusive of mold flash and metal burrs.

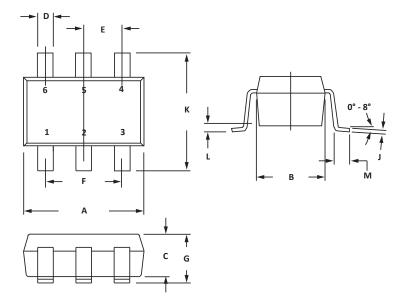


PAD LAYOUT DIMENSIONS						
DIM	MILLIMETERS	INCHES				
	NOMINAL	NOMINAL				
А	0.50	0.020				
В	1.30	0.051				
С	0.65	0.026				
D	1.72	0.068				
Е	0.60	0.024				

### NOTES

1. Controlling dimension: inches.



## **TAPE AND REEL**

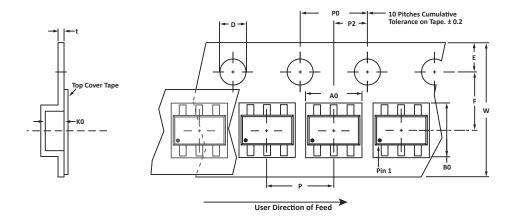

SPECIFICATIONS												
REEL DIA.	TAPE WIDTH	A0	В0	КО	D	E	F	W	P0	P2	Р	tmax
178mm (7")	8mm	2.25 ± 0.10	2.34 ± 0.10	1.22 ± 0.10	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.25

### NOTES

- 1. Dimensions are in millimeters.
- 2. Surface mount product is taped and reeled in accordance with EIA-481.
- 3. Suffix T73 = 7" Reel 3,000 pieces per 8mm tape.
- 4. Marking on Part marking code (see page 2) and pin one defined by dot on package.

Package outline, pad layout and tape specifications per document number 06019.R5 3/11.

ORDERING INFORMATION							
BASE PART NUMBER LEADFREE SUFFIX TAPE SUFFIX QTY/REEL REEL SIZE TUBE							
PLR0504F	PLR0504F -P -T73		3,000	7"	n/a		
This device is only available in a Lead-Free configuration.							

05240.R3 9/12 Page 5 <u>www.protekdevices.com</u>



### **COMPANY INFORMATION**

#### **COMPANY PROFILE**

In business more than 20 years, ProTek Devices™ is a privately-held company located in Tempe, Arizona, that offers a product line of transient voltage suppressors (TVS); avalanche breakdown diodes; steering diode TVS arrays and other surge suppressor component products. These TVS devices protect electronic systems from the effects of lightning, electrostatic discharge (ESD), nuclear electromagnetic pulses (NEMP), inductive switching and EMI / RFI. ProTek Devices also offers high performance interface and linear products that include analog switches; multiplexers; LED drivers; audio control ICs; RF and related high frequency products. The analog devices work in a host of consumer; industrial; automotive and other applications.

### **CONTACT US**

### **Corporate Headquarters**

2929 South Fair Lane Tempe, Arizona 85282 USA

## By Telephone

General: 602-431-8101

Sales: & Marketing: 602-414-5109 Customer Service: 602-414-5114

Product Technical Support: 602-414-5107

#### By Fax

General: 602-431-2288

### By E-mail:

Sales: sales@protekdevices.com

Customer Service: <a href="mailto:service@protekdevices.com">service@protekdevices.com</a>
Technical Support: <a href="mailto:support@protekdevices.com">support@protekdevices.com</a>

## ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19

Zervex

Singapore - 408538 Tel: +65-67488312 Fax: +65-67488313

## Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 2007 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.