



Description

The EX-400 provides exceptionally low aging rates and tight temperature stabilities in an extremely small package over a wide range of environmental conditions. This EMXO series bridges the gap between current large, high precision OCXO's and smaller TCXO's. The EX-400 Series becomes the most economical choice where there is a need for spectral purity, short and long term stability, along with small size and dramatically reduced power consumption.

Features Applications

- 4-Pin Dip
- Uses Doubly Rotated Crystal
- Low Power Consumption: <0.35 watts @ +25°C
- Previous Model Number: EX-380, EX-381, EX-385 series
- Frequency Range: 10 MHz 80 MHz

- SONET/SDH, DWDM, FDM, ATM, 3G
- Telecom Transmission and Switching Equipment
- Wireless Communication Equipment
- · Military Airborne and Mobile systems

Performance Specifications


Frequency Stabilities ¹					
Parameter	Min	Тур	Max	Units	Condition
vs. operating temperature range (refer-	-75		+75	ppb	-20 +70°C(10 to 20.49 MHz)
enced to +25°C)	-100		+100	ppb	-20 +70°C (10 to 50 MHz)
	-100		+100	ppb	-40 +85°C (10 to 20.49 MHz)
	-150		+150	ppb	-20 +70°C
	-150		+150	ppb	-40… +85°C
	-150		+150	ppb	-55 +85°C (10 to 50 MHz)
	-250		+250	ppb	-20 +70°C
	-250		+250	ppb	-40… +85°C
	-250		+250	ppb	-55… +85°C
	-500		+500	ppb	-20 +70°C
	-500		+500	ppb	-40 +85°C
	-500		+500	ppb	-55… +85°C

Performance Specifications

Frequency Stabilities ¹							
Parameter		Min Typ Max Units		Units	Condition		
vs. Stratum 3 per GR-1244- CORE	Operating Temp Holdover Drift MTIE	-140 -140 -140 -370 -4.63		+140 +140 +140 +370 +4.63 +1	ppb ppb ppb ppb 10-13/sec ppm	-20 +70°C -40 +85°C (10 to 50 MHz) -55 +85°C (10 to 20.49 MHz) 24 hours Over 7100 seconds 0.16sec < Observe Times < 64 sec	
Wa	rm-up Time			1 2	minutes minutes	to \pm 1ppm of final frequency (1 hour) to \pm 100ppb of final frequency (1 hour)	
Initial Tolerance (10 to 19.9 MHz) Initial Tolerance (20 to 80 MHz)		-1.0 -1.5 -2.5		+1.0 +1.5 +2.5	ppb ppb	for fixed frequency for fixed frequency $ VS \pm 5\% $	
	e change (10 to 50 MHz) e change (50 to 80 MHz)	-5.0		+5.0	ppb	VS ± 5% VS ± 5%	
vs. load change (10 to 80 MHz)	-15		+15	ppb	Load ± 5%	
vs. aging / day (1 vs. aging / day (1 vs. aging / day (2 vs. aging / day (5	5 to 19.9 MHz) 0 to 49.9 MHz)	-1.0 -2.0 -3.0 -4.0		+1.0 +2.0 +3.0 +4.0	ppb ppb ppb ppb	after 30 days of operation after 30 days of operation after 30 days of operation after 30 days of operation	
vs. aging / 1 year vs. aging / 1 year vs. aging / 1 year	(15 to 19.9 MHz)	-200 -300 -500		+200 +300 +500	ppb ppb ppb	after 30 days of operation after 30 days of operation after 30 days of operation	
vs. aging / 10 yea	vs. aging / 10 year (10 to 14.9 MHz) vs. aging / 10 year (15 to 19.9 MHz) vs. aging / 10 year (20 to 80 MHz)		6	+1000 +2000 +3000	ppb ppb ppb	after 30 days of operation after 30 days of operation after 30 days of operation	
Cumply valtage (Store doud)	4.75	Supp 5.0	ly Volta 5.25	ge (Vs) VDC		
Supply voltage (Supply voltage		3.135	3.3	3.465	VDC		
Supply voltage (option,	3.133	3.3	1.5	Watts	during warm-up	
Power Consump	tion			0.35 0.45	Watts Watts	steady state @ +25°C (10 to 29.99 MHz) steady state @ +25°C (30 to 80 MHz)	
				0.7	Watts	steady state @ -40°C (10 to 29.99 MHz)	
				0.8	Watts	steady state @ -40°C (30 to 80 MHz)	
				RF Outp	ut		
Signal [Standard				CMOS	n.c		
Load			15		pF		
Signal Level (Vol		0.0		0.4	VDC		
Signal Level (Vol	n) 	0.8			VDC		
Rise/Fall Time				+5	ns	(10-80%)	
Duty cycle		40 60 %		%	(Voh-Vol)/2		
Signal [Option]			Sinewave				
Load	tous doud?		50	. 4	ohm	50 Object to all	
Output Power [S		0		+4	dBm	50 Ohm load	
Output Power [Option]		+3		+7	dBm	50 Ohm load	

Frequency Stabilities ¹						
Parameter	Min Typ Max Units		Units	Condition		
Frequency Tuning (EFC) 10 to 80 MHz						
Tuning Range	Fixed OCXO; No adjust			djust		
Tuning Range	±1.0 ±2.0 ±3.0 ±4.0		±5.0 ±8.0 ±10.0 ±12.0	ppm ppm ppm ppm	with 10 to 14.99 MHz with 15 to 20.48 MHz with 20.5 to 49.99 MHz with 50 to 80 MHz	
Control Voltage Range	0		Vdd	VDC		
Tuning Slope		Р	ositive			
		Additi	onal Par	ameters		
			-100	dBc/Hz	10 Hz	
			-130	dBc/Hz	100 Hz	
Phase Noise @ 20 MHz (Typical)			-140	dBc/Hz	1 KHz	
			-145	dBc/Hz	10 KHz	
			-150	dBc/Hz	10 KHz	
			-80	dBc/Hz	10 Hz	
			-110	dBc/Hz	100 Hz	
Phase Noise @ 50 MHz (Typical)			-130	dBc/Hz	1 KHz	
			-135	dBc/Hz	10 KHz	
			-140	dBc/Hz	10 KHz	
Allan Deviation			0.2	ppb	Tau = 1 sec to 10 sec (10 to 20.49 MHz)	
Allah Beviation			0.5	ppb	Tau = 1 sec to 10 sec (20.5 to 80 MHz)	
Weight			5	g		
Absolute Maximum Ratings						
Supply Voltage			5.5	VDC	with Vs=5 V	
Supply voltage			5.5	VDC	with Vs=3.3 V	
Output Load			30	pF		
Operable temperature range	-55		+85	°C		
Storage temperature range	-55		+85	°C		

Outline Drawing / Enclosure

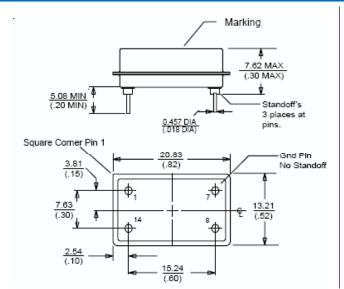


Dimensions in mm (inches)

Type A				
Code	Height "H"	Pin Length "L"		
0	7.62	5.08		

Pin Connections				
1	EFC \ No Connect \ Oven Monitor			
7	Ground (Case)			
8	RF Output			
14	Supply Voltage Input			

Outline Drawing / Enclosure

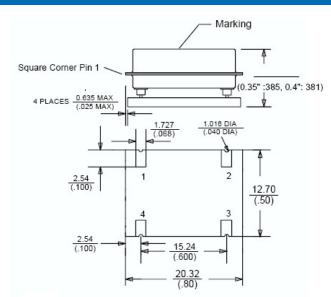


Dimensions in mm (inches)

Туре В					
Code	Height "H"	Pin Length "L"			
1	8.9 (0.35")	NA			
2	10.2 (0.4")	NA			


Pin Connections				
1	EFC \ No Connect \ Oven Monitor			
7	Ground (Case)			
8	RF Output			
14	Supply Voltage Input			

Recommended Reflow Profile

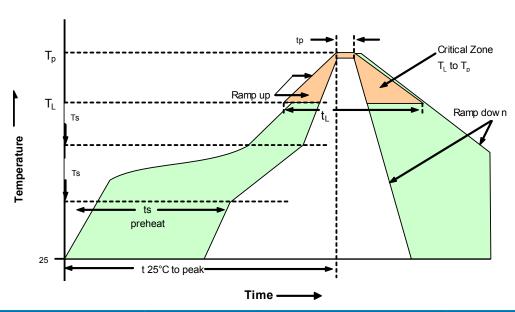

Profile Feature	Sn-Pb Assembly	Profile Feature	Sn-Pb Assembly			
PRECAUTION: Series shall not expose to temperature higher than 230°C. If exposing to temperature higher than 230°C, stability and power consumption may permanently degrade.						
Average ramp-up rate (TL to Tp)	3°C/second max.	Time 25°C to Peak Temperature	4 minutes max.			
Preheat -Temperature Min Tsmin) -Temperature Min Tsmax) -Time (min to max) (ts)	135°c 155°c 60-90 seconds	Time maintained above - Temperature (TL) - Time (tL)	183°C 45-60 seconds			
Tsmax to TL - Ramp-up Rate	3°C/second max.					
Time maintained above - Temperature (TL) - Time (tL)	183°C 45-60 seconds	Time within 5°C of actual Peak Temperature (tp)	10-20 seconds max.			
Peak Temperature (Tp)	max 220°C	Ramp-down Rate	6°C/second max.			
Note: All temperatures refer to topside of the package, measured on the package body surface.						

Ordering Information

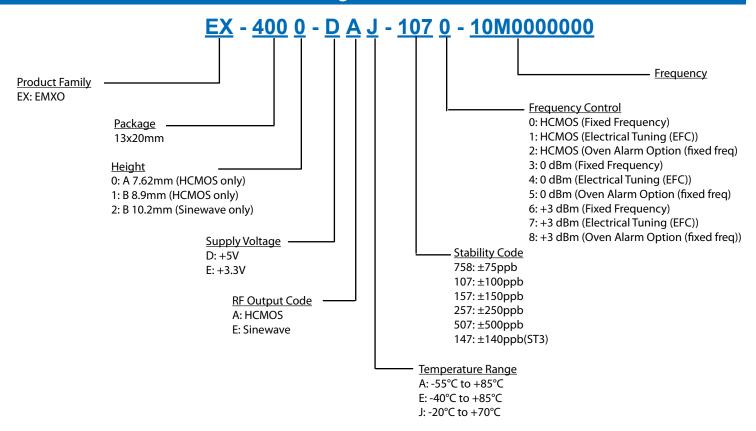

Notes:

- 1. Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
- 2. Unless other stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
- 3. Phase noise degrades with increasing output frequency.
- 4. Subject to technical modification.
- 5. Contact factory for availability.

For Additional Information, Please Contact USA: Asia: Europe: Vectron International Vectron International **Vectron International** 267 Lowell Road Landstrasse, D-74924 1F-2F, No 8 Workshop, No 308 Fenju Road Hudson, NH 03051 Neckarbischofsheim, Germany WaiGaoQiao Free Trade Zone Tel: 1.888.328.7661 Tel: +49 (0) 3328.4784.17 Pudong, Shanghai, China 200131 Tel: 86.21.5048.0777 Fax: 1.888.329.8328 Fax: +49 (0) 3328.4784.30 Fax: 86.21.5048.1881 Disclaimer Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Rev: 11-24-2008 daf