


SAW Bandpass Filter F9175



Features

- RF bandpass filter
- High attenuation
- Usable bandwidth 45MHz
- No matching 50Ω single-ended operation
- Ceramic Surface Mounted Device (SMD) Package

Package Dimensions

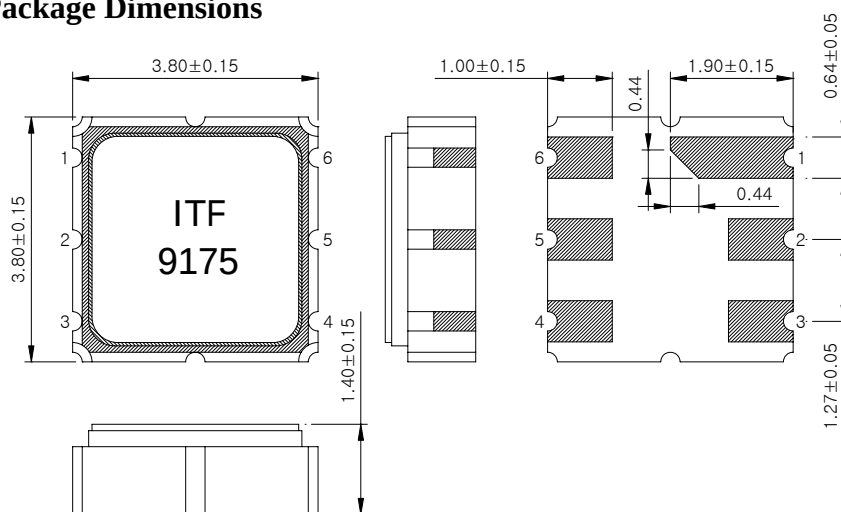

Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um
Ni Plating

Pin Configuration

2	Input
5	Output
1, 3, 4, 6	Case ground

Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-10	25	60
Storage Temperature Range	°C	-40	-	85
Power Handling Capability	dBm	-	-	-

Electrostatics Sensitive Device (ESD)

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9175	
		Rev. Date	2004-11-01	
		Rev.	NR1014-AS02	1/7

SAW Bandpass Filter F9175



Specifications

$F_c = 917.0\text{MHz}$

Terminating source impedance : 50Ω

Terminating load impedance : 50Ω

		Minimum	Typical	Maximum
Center Frequency (F_c)	MHz	-	917.0	-
Insertion Loss ($F_c \pm 22.5\text{ MHz}$)	dB	-	4.5	6.0
Amplitude Ripple ($F_c \pm 22.5\text{ MHz}$)	dB	-	2.0	2.5
Absolute Group Delay at F_c	nsec	-	35	-
Group Delay Variation ($F_c \pm 22.5\text{ MHz}$)	nsec	-	15	-
VSWR ($F_c \pm 22.5\text{ MHz}$)		-	1.5	-
Relative Attenuation ... ~ $F_c - 75\text{ MHz}$ $F_c + 50\text{ MHz} \sim \dots F_c + 125\text{ MHz}$ $F_c + 125\text{ MHz} \sim \dots$	dB	40 20 50	50 25 55	-
Temperature Coefficient of Frequency	ppm/ $^{\circ}\text{C}$	-	-80	-

Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9175	
		Rev. Date	2004-11-01	
		Rev.	NR1014-AS02	2/7

SAW Bandpass Filter F9175



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)



Marking Configuration

ITF¹⁾

9175²⁾

1) Manufacturer name

2) Marking Number

* Ink or Laser Marking available

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9175	
		Rev. Date	2004-11-01	
		Rev.	NR1014-AS02	3/7

SAW
DEVICE

16 Apr 2004 03:53:52


[CH1] S21 LOG 10 dB/ REF 0 dB 2: 13780 dB 45.000 000 MHz

PRM

Cor

CH1 Markers
mean: -4 4606 dB Δ REF=1
s. dev: . 5350 dB
p-p: 1 3829 dB



CENTER 917.000 000 MHz SPAN 400.000 000 MHz

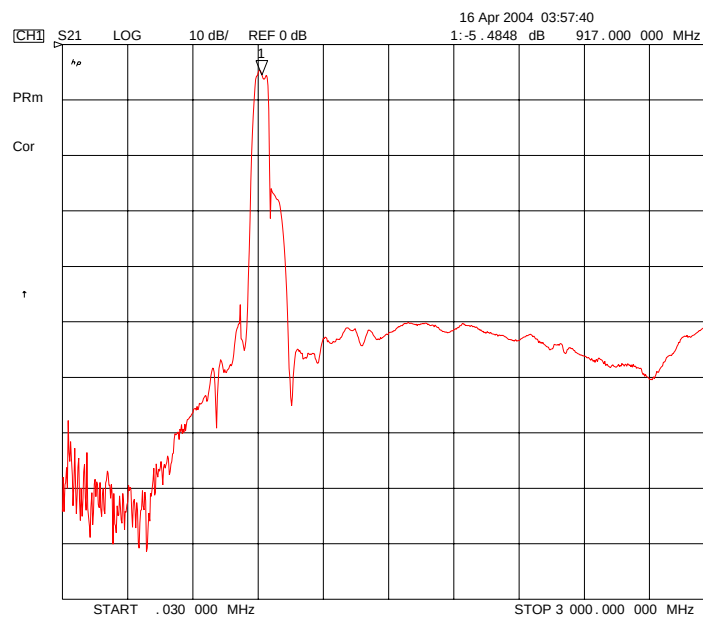



SAW Bandpass Filter F9175



Input / Output VSWR Charts

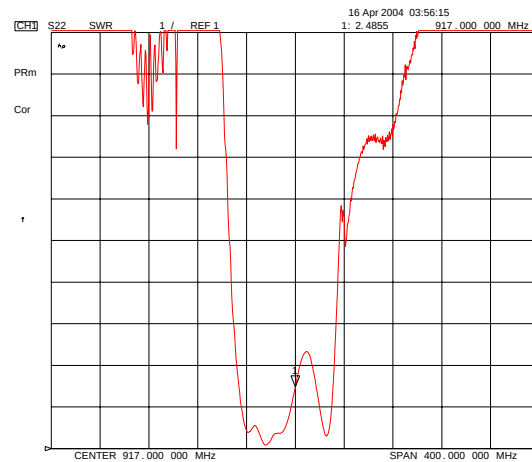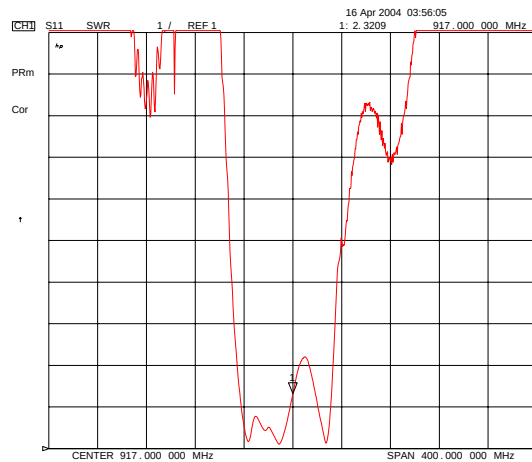

Input / Output Smith Charts

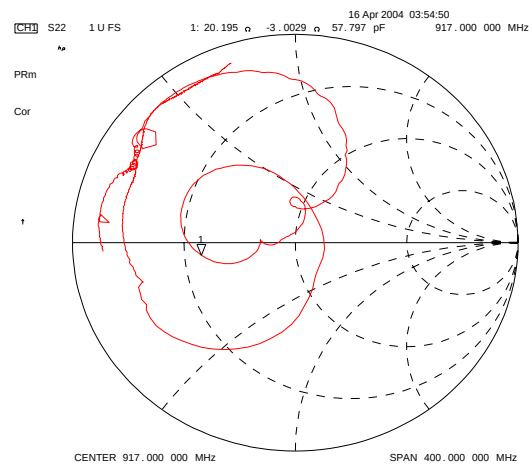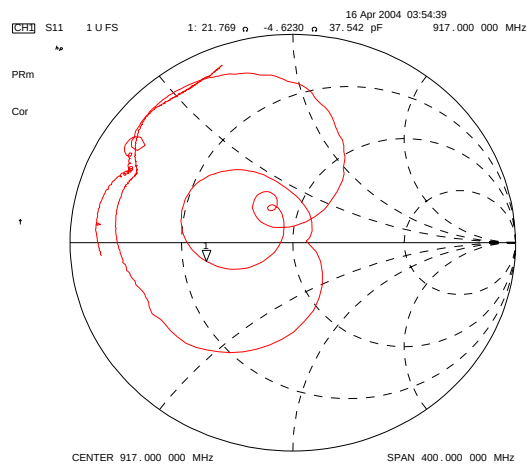


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9175	
		Rev. Date	2004-11-01	
		Rev.	NR1014-AS02	5/7

SAW Bandpass Filter F9175




Packing Specification

1. Reeling Quantity : 1000 pcs / reel
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

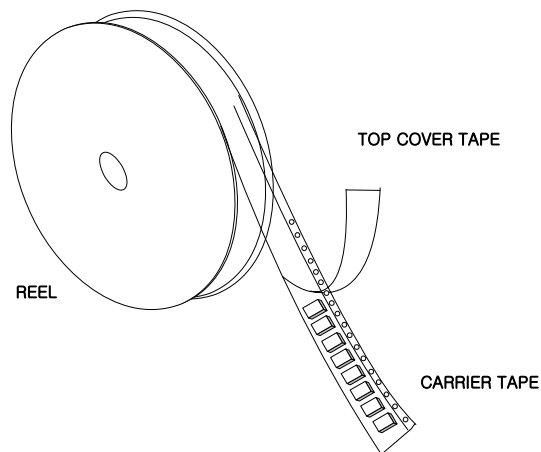

Tape Specification

1. Leader part and vacant position specification

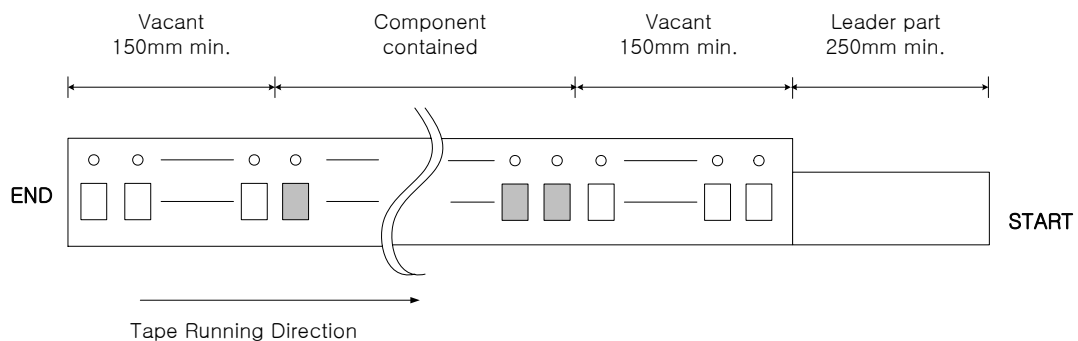


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : $0 \sim 15^\circ$
- 2) speed : 300mm/min
- 3) force : 20~70g

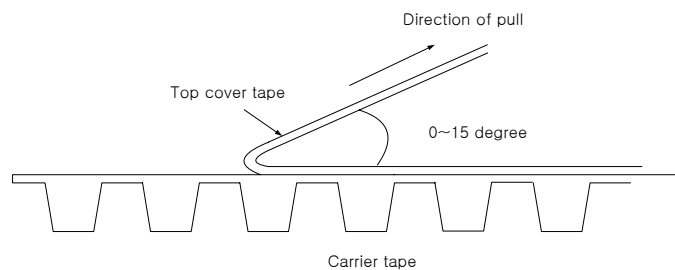


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9175	
		Rev. Date	2004-11-01	
		Rev.	NR1014-AS02	6/7

SAW Bandpass Filter F9175




Carrier Tape Dimensions [unit : mm]

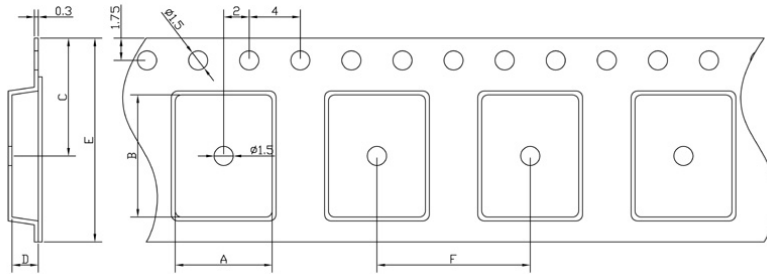


A	4.30 ± 0.1
B	4.30 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

Part Direction

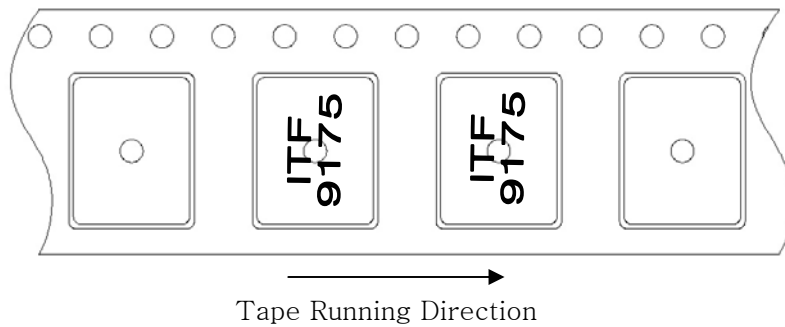

Tape Running Direction

Reel Dimensions [unit : mm]

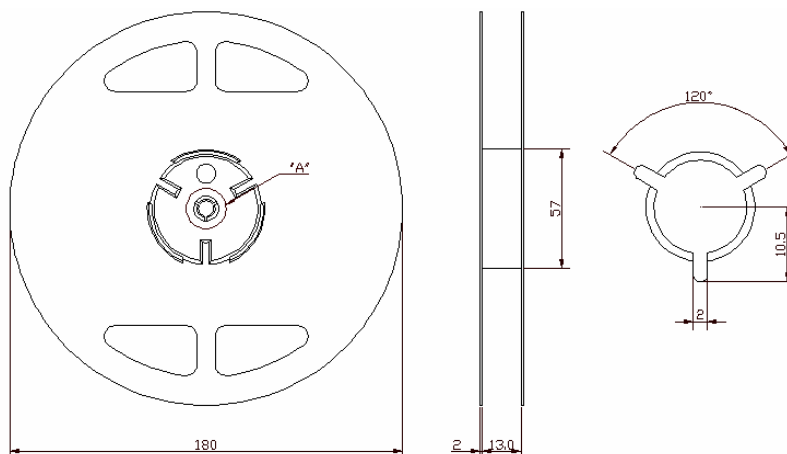

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F9175	
		Rev. Date	2004-11-01	
		Rev.	NR1014-AS02	7/7