

## DOCSIS 3.0 and video front-end for gateway set-top box and cable modem

Data brief

### Features

- Dual CPU architecture - one for DOCSIS® and one for host including eRouting and VoIP management
- ARM Cortex-A9 770 MHz, dual-core CPU with NEON™ SIMD co-processor
- DOCSIS 3.0 data cable modem:
  - Up to 16 downstream channels (up to 800 Mbit/s)
  - Up to 4 upstream channels
- Up to 8 video QAM demodulation channels
- Video QAM operations independent from DOCSIS
- Digital direct interface to full band tuners
- VoIP through ARM Cortex-A9 CPU:
  - Up to 2 lines VoIP with PacketCable™ 1.5 or 2.0 reference software
- USB 2.0 host interface
- 2 x PCIe interfaces for WiFi connectivity
- DDR2/3, 8/16-bit LMI interface
- Serial NOR, SPI interface

- 3 x Gbit Ethernet ports
- Flexible channel allocation for active standby power consumption reduction


### Description

STiD128 is STMicroelectronics' next generation front-end device for interactive cable gateway and set-top box applications. STiD128 can also be used standalone for cable modem application.

STiD128 provides a solution for operators to specify a range of very high-performance DOCSIS 3.0 STB, multimedia gateway or cable modem platforms.

A total of 16 demodulation channels can be used for DOCSIS out of which 8 channels can be used as video channels. Allocation of the channels is flexible.

A powerful dual core CPU allows telephony and data distribution including routing/switching and firewalling.

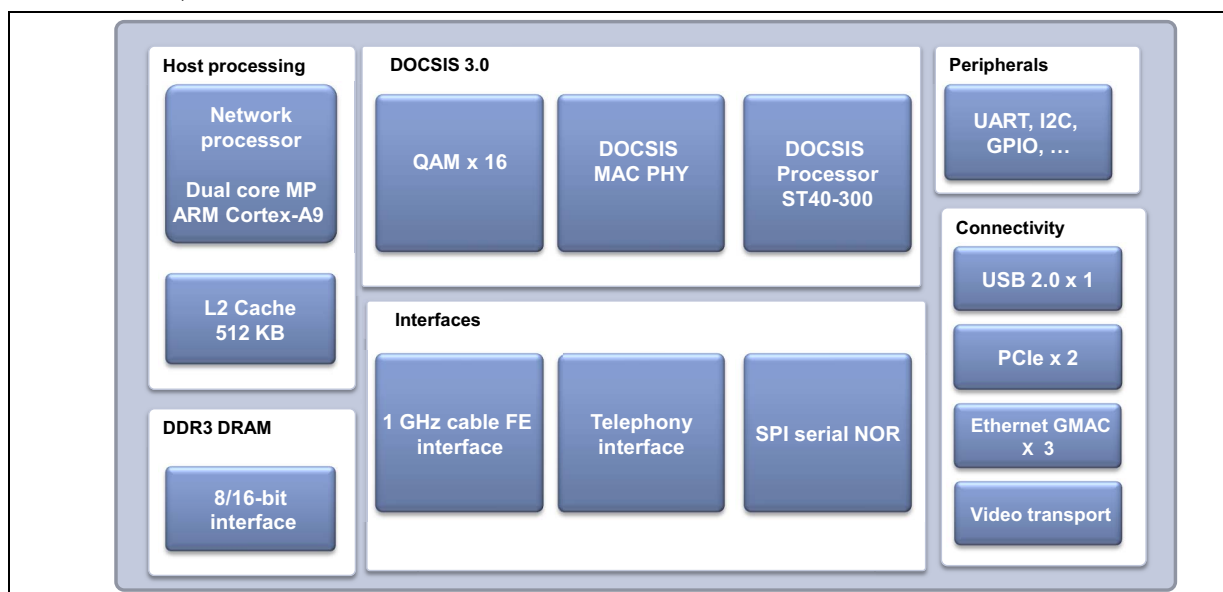

# 1 Introduction

The STiD128 DOCSIS 3.0 cable modem integrates multi-stream transport processing, real-time CPU, eRouter/switch, embedded cable modem, embedded digital voice adaptor, VoIP, USB 2.0 host, three GMAC interfaces and two PCIe interfaces.

## Features

Dual-core, ARM Cortex-A9, 770 MHz applications CPU with 512 KB L2 cache.

16 QAM channels for DOCSIS.

Telephony, VoIP with PacketCable™ 1.5 and 2.0 complete stack.

eRouter and firewall for data distribution through Gbit Ethernet MAC or PCIe interface.

Video over DOCSIS extraction and MPEG transport stream transmissions to backend device.

## Benefits

Enables high performance networking and VoIP.

With 16-channels capability, STiD128 can provide a future proof solution for next generation gateway devices.

STiD128 enables a complete, cost-effective telephony solution, with external components reduced down to a standard Slic Codec.

A direct interface to an RF DECT or CAT-iq™ device is available to allow the integration of the DECT functionality with the packet cable or set-top box stack.

STiD128 manages the broadband data distribution within the home. The Gigabit Ethernet interfaces allow connection to a switch or PHY, or to home networking technology devices such as MoCA®, HomePlug or HPNA.

The PCIe interfaces permit efficient data transfer through WiFi devices.

STiD128 provides high-bit-rate data and live TV video demodulation. With the capability to extract and merge video over IP with live video, STiD128 is the perfect solution to bridge conventional video distribution to a full IP solution.

## 2 Revision history

**Table 1. Document revision history**

Date	Revision	Changes
29-Aug-2012	1.0	Initial release.
07-Nov-2012	2.0	– Updated the document for number of Ethernet ports. – Updated the cover page diagram. – Added the last feature and benefit in <a href="#">Chapter 1</a> . – Updated the introductory text in <a href="#">Chapter 1</a> . – Updated the description on cover page for transport streams.
17-Dec-2012	3.0	– Updated the cover page. – Changed the title.

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2012 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)