

# PART OBSOLETE - EOL18

Bulletin I2716 rev. F 06/03

International  
**IOR** Rectifier

## 4GBL Series

### 4.0 Amps Single Phase Full Wave

### Bridge Rectifier

#### Features

- Diode chips are glass passivated
- Easy to assemble & install on P.C.B.
- High Surge Current Capability
- High Isolation between terminals and molded case (1500 V<sub>RMS</sub>)
- Lead free terminals solderable as per MIL-STD-750 Method 2026
- Terminals suitable for high temperature soldering at 260°C for 8-10 secs
- UL E160375 approved


$$I_{O(AV)} = 4A$$
$$V_{RRM} = 50/ 800V$$

#### Description

These GBL Series of Single Phase Bridges consist of four glass passivated silicon junction connected as a Full Wave Bridge. These four junctions are encapsulated by plastic molding technique. These Bridges are mainly used in Switch Mode power supply and in industrial and consumer equipment.

#### Major Ratings and Characteristics

Parameters	4GBL	Units
$I_O$	4	A
@ $T_C$	50	°C
$I_{FSM}$	150	A
@ 50Hz	158	A
@ 60Hz	113	A <sup>2</sup> s
$I^2t$	104	A <sup>2</sup> s
$V_{RRM}$ range	50 to 800	V
$T_J$	- 55 to 150	°C

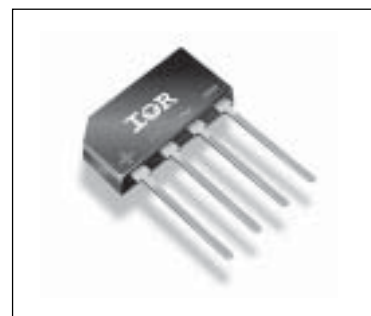

4GBL

**ELECTRICAL SPECIFICATIONS**

Voltage Ratings

Type number	Voltage Code	$V_{RRM}$ , max repetitive peak rev. voltage $T_J = T_J \text{ max.}$ V	$V_{RMS}$ , maximum RMS voltage $T_J = T_J \text{ max.}$ V	$V_{RSM}$ , max non-repetitive reverse voltage $T_J = T_J \text{ max.}$ V	$I_{RRM}$ max. @ rated $V_{RRM}$ $T_J = 25^\circ\text{C}$ $\mu\text{A}$	$I_{RRM}$ max. @ rated $V_{RRM}$ $T_J = 150^\circ\text{C}$ $\mu\text{A}$
4GBL	005	50	35	75	5	400
	01	100	70	150	5	400
	02	200	140	275	5	400
	04	400	280	500	5	400
	06	600	420	725	5	400
	08	800	560	900	5	400

**Forward Conduction**


Parameters	4GBL	Unit	Conditions
$I_O$ Maximum DC output current	4	A	$T_C = 50^\circ\text{C}$ , Resistive & inductive load
	3.2		$T_C = 50^\circ\text{C}$ , Capacitive load
$I_{FSM}$ Maximum peak, one-cycle non-repetitive surge current, following any rated load condition and with rated $V_{RRM}$ reapplied	150		t = 10ms, 20ms
	158		t = 8.3ms, 16.7ms $T_J = 150^\circ\text{C}$
$I^2t$ Maximum $I^2t$ for fusing, initial $T_J = T_J \text{ max}$	113	$\text{A}^2\text{s}$	t = 10ms
	104		t = 8.3ms
$V_{FM}$ Maximum peak forward voltage per diode	0.975	V	$T_J = 25^\circ\text{C}$ , $I_{FM} = 4\text{A}$
$I_{RM}$ Typical peak reverse leakage current t per diode	5	$\mu\text{A}$	$T_J = 25^\circ\text{C}$ , 100% $V_{RRM}$
$V_{RRM}$ Maximum repetitive peak reverse voltage range	50 to 800	V	

**Thermal and Mechanical Specifications**


Parameters	4GBL	Unit	Conditions
$T_J$ Operating and storage temperature range	-55 to 150	$^\circ\text{C}$	
$R_{thJC}$ Max. thermal resistance junction to case	6.5	$^\circ\text{C/W}$	DC rated current through bridge (1)
$R_{thJA}$ Thermal resistance, junction to ambient	22	$^\circ\text{C/W}$	DC rated current through bridge (1)
W Approximate weight	2 (0.07)	g (oz)	

Note (1): Devices mounted on 75 x 75 x 3 mm aluminum plate

**Ordering Information Table**

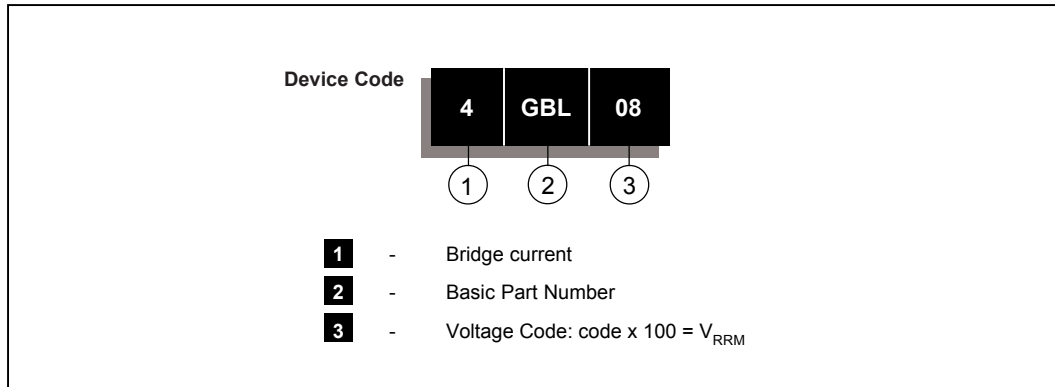

**Outline Table**

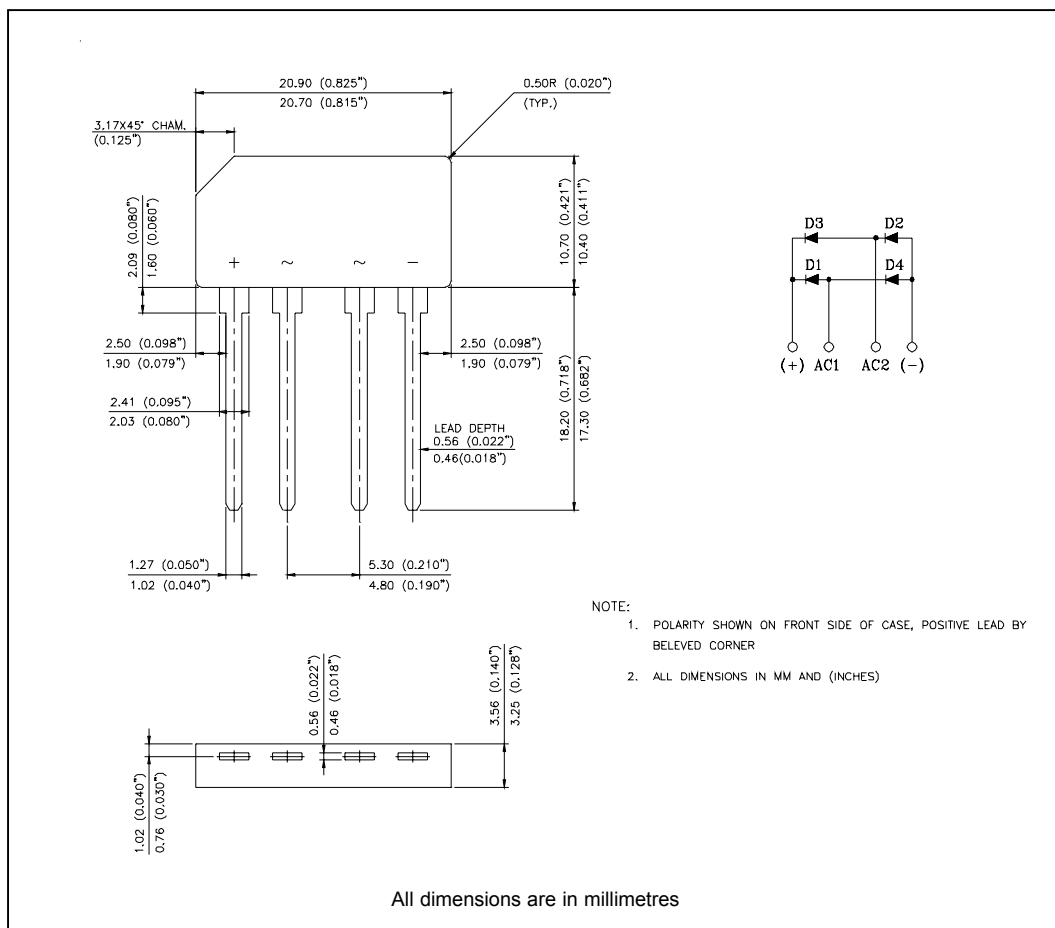

NOTE:  
 1. POLARITY SHOWN ON FRONT SIDE OF CASE, POSITIVE LEAD BY BEVELED CORNER  
 2. ALL DIMENSIONS IN MM AND (INCHES)

# 4GBL Series

Bulletin I2716 rev. F 06/03

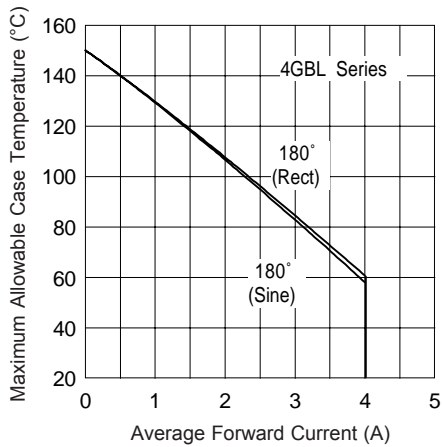


Fig. 1 - Current Ratings Characteristics

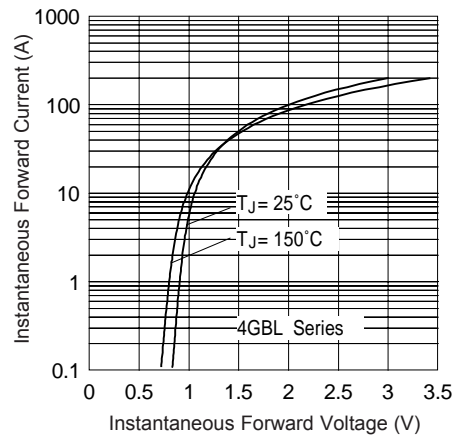


Fig. 2 - Forward Voltage Drop Characteristics

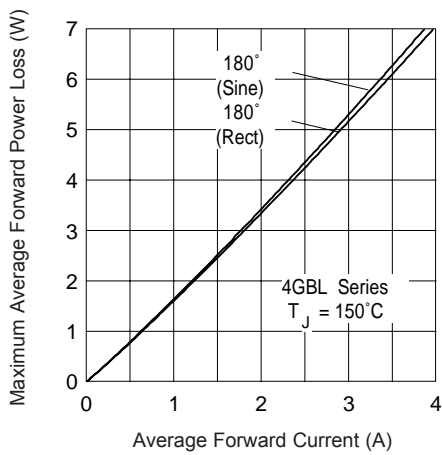


Fig. 3 - Total Power Loss Characteristics

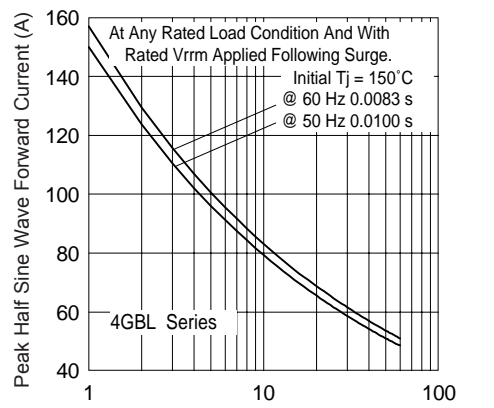


Fig. 4 - Maximum Non-Repetitive Surge Current

Data and specifications subject to change without notice.  
This product has been designed and qualified for Multiple Level.  
Qualification Standards can be found on IR's Web site.

International  
**IOR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 06/03