



SB820F THRU SB8100F

ISOLATION SCHOTTKY BARRIER RECTIFIERS
 VOLTAGE - 20 to 100 Volts CURRENT - 8.0 Amperes


FEATURES

Plastic package has Underwriters Laboratory
 Flammability Classification 94V-0 utilizing
 Flame Retardant Epoxy Molding Compound
 Exceeds environmental requirements

High surge capacity
 For use in low voltage, high frequency inverters,
 free wheeling, and polarity protection applications

MECHANICAL DATA

Case: ITO-220AC full molded plastic package
 Terminals: Leads, solderable per MIL-STD-202, Method 208
 Polarity: As marked
 Mounting Position: Any
 Weight: 0.08 ounce, 2.24 grams

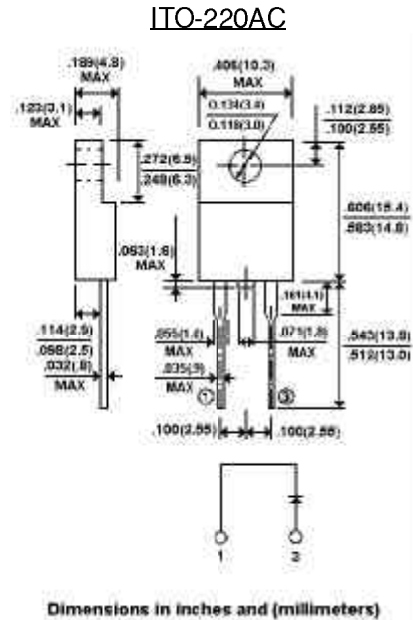

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Resistive or inductive load.

For capacitive load, derate current by 20%.

	SB820F	SB830F	SB840F	SB850F	SB860F	SB880F	SB8100F	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	80	100	V
Maximum RMS Voltage	14	21	26	35	42	56	80	V
Maximum DC Blocking Voltage	20	30	40	50	60	80	100	V
Maximum Average Forward Rectified Current at T _C =100 °C	8.0							A
Peak Forward Surge Current, 8.3ms single half sine wave superimposed on rated load(JEDEC method)	150							A
Maximum Forward Voltage at 8.0A per element Maximum	0.55		0.75		0.85			V
Typical Thermal Resistance Note R _{θJKJA}	60							°C/W
Operating and Storage Temperature Range T _J	-50 TO +150							°C

NOTES:

Thermal Resistance Junction to Ambient

RATING AND CHARACTERISTIC CURVES

SB820F THRU SB8100F

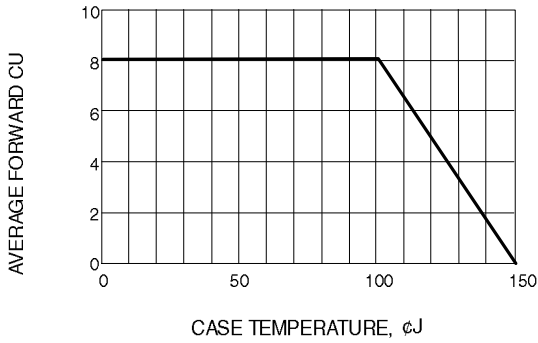


Fig. 1-FORWARD CURRENT DERATING CURVE

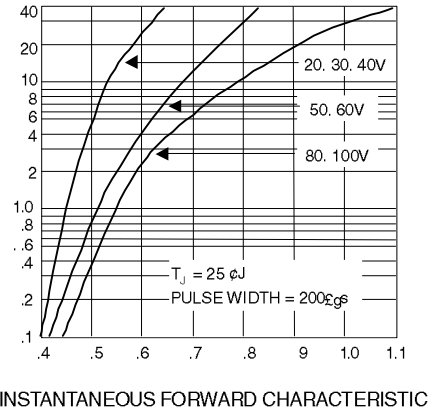


Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

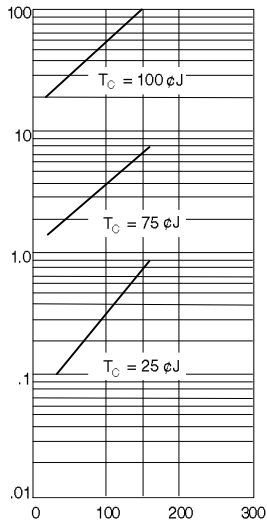


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

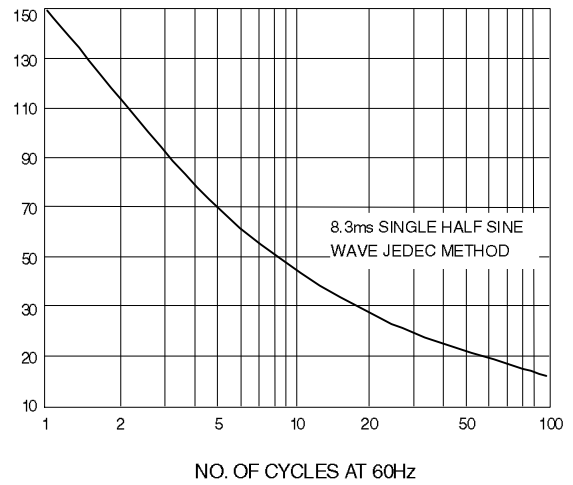


Fig. 4-MAXIMUM NON-REPETITIVE SURGE CURRENT

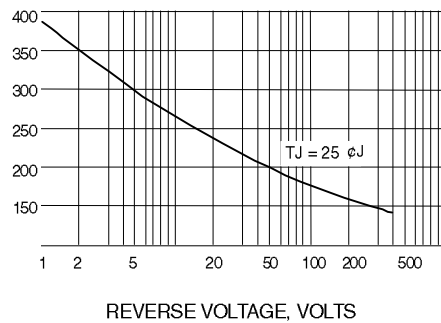


Fig. 5-TYPICAL JUNCTION CAPACITANCE