




2.3" 5 × 8 DOT MATRIX DISPLAYS


**YELLOW GMA 2885C GMC 2885C
HER GMA 2985C GMC 2985C
GREEN GMA 2485C GMC 2485C
BICOLOR RED/GREEN GMA 2685C**

PACKAGE DIMENSIONS

A. GMX2X85C

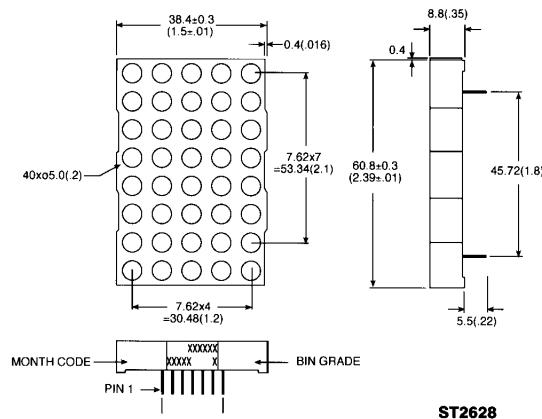

B. GMA2685C

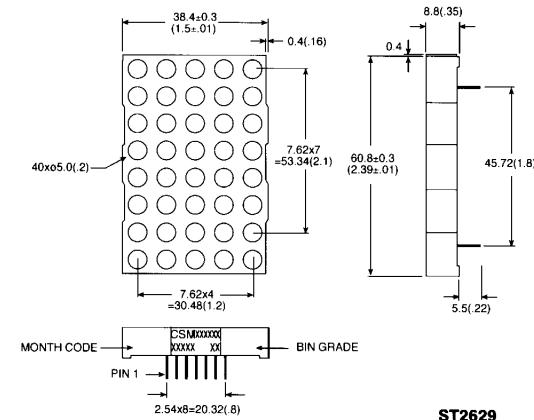

DESCRIPTION

These are 5×8 dot matrix displays with large emitting area (0.2" diameter) LED sources. The GMX2X85C series are single color displays with the exception of GMA2685C which is a bicolor of red/green displays.

All displays have gray face and white dot color. Other face or dot colors are available with minimum requirement.

The X in GMX denotes row anode or row cathode.

FEATURES

- 2.3" (58.4 mm) character height
- Low power requirement
- High contrast & brightness
- Wide viewing angle 130°
- 5 × 8 array with X-Y select
- Compatible with USASCII and EBCDIC codes
- X-Y stackable
- Choice of two matrix orientation anode or cathode column
- Easy mounting on PCB
- Categorized for luminous intensity
- Single color displays have the choice of 3 bright colors — yellow/orange/green
- Multicolor color displays are applicable to 3 bright colors — greens, orange (HER) and yellow (green and HER mixed)

NOTES:

1. ALL PINS ARE 00.5 (.02).
2. DIMENSIONS IN MILLIMETERS (INCH), TOLERANCE IS ±0.25 (.01) UNLESS OTHERWISE NOTED.



**2.3" 5 × 8
DOT MATRIX DISPLAYS**

ABSOLUTE MAXIMUM RATING ($T_A = 25^\circ\text{C}$ unless otherwise specified)				
PARAMETER	YELLOW	HER	GREEN	UNITS
Power dissipation per dot/color	60	70	75	mW
Peak forward current per dot/color (duty cycle 1/10, 10KHz)	80	100	100	mA
Continuous I_F per dot/color	20	25	25	mA
Reverse voltage V_R per dot/color	5	5	5	V
Operating and storage temperature range	-25°C to +85°C			
Soldering time at 260°C (1/16 inch below seating plane)	3 sec			

MODEL NUMBERS						
PART NO.			MULTI-COLOR	DESCRIPTION	PACKAGE DIMENSION	INTERNAL CIRCUIT DIAGRAM
YELLOW	HER	GREEN				
GMC2885C	GMC2985C	GMC2485C		Anode column, cathode row	A	A
GMA2885C	GMA2985C	GMA2485C	GMA2685C	Cathode column, anode row	A	B
				Cathode column, anode row	B	C



2.3" 5 × 8 DOT MATRIX DISPLAYS

ELECTRICAL/OPTICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise specified)

GMX 2485C

PARAMETER	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
Average luminous intensity	3000			μcd	$I_F=20 \text{ mA}$
Peak emission wavelength	565			nm	$I_F=20 \text{ mA}$
Spectral line half-width	30			nm	$I_F=20 \text{ mA}$
Forward voltage, any dot	2.1	2.8		V	$I_F=20 \text{ mA}$
Reverse voltage, any dot	100			μA	$V_R=5 \text{ V}$

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES

($T_A=25^\circ\text{C}$ Unless otherwise specified)

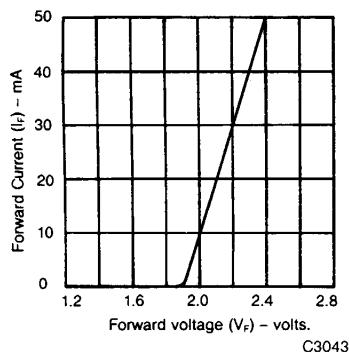


Fig. 1. Forward Current vs.
Forward Voltage

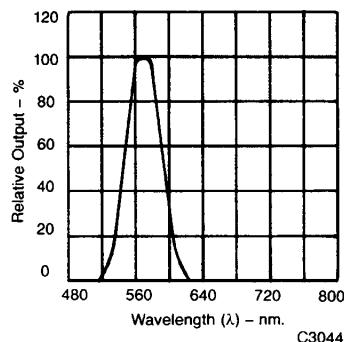


Fig. 2. Spectral Response

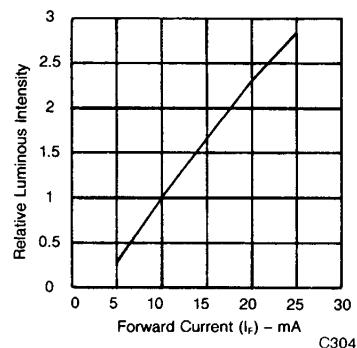


Fig. 3. Relative Luminous Intensity vs.
Forward Current

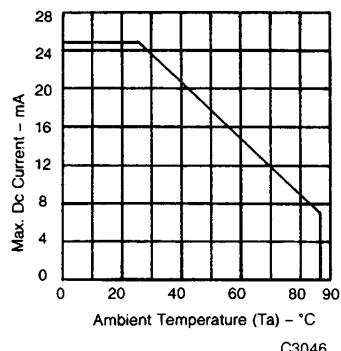


Fig. 4. Maximum Allowable
DC Current Per Segment vs.
A Function of Ambient
Temperature

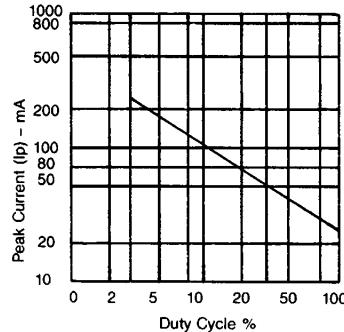


Fig. 5. Max Peak Current vs. Duty Cycle %
(Refresh Rate $f=1 \text{ KHz}$)

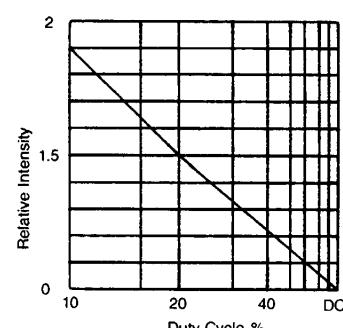


Fig. 6. Luminous Intensity vs.
Duty Cycle %
(Average $I_F=10 \text{ mA}$ Per Seg.)



**2.3" 5 × 8
DOT MATRIX DISPLAYS**

ELECTRICAL/OPTICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise specified)
GMX 2985C

PARAMETER	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
Average luminous intensity	3000			μcd	$I_F=20 \text{ mA}$
Peak emission wavelength	635			nm	$I_F=20 \text{ mA}$
Spectral line half-width	30			nm	$I_F=20 \text{ mA}$
Forward voltage, any dot	2.1	2.8		V	$I_F=20 \text{ mA}$
Reverse voltage, any dot	100			μA	$V_R=5 \text{ V}$

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ Unless otherwise specified)

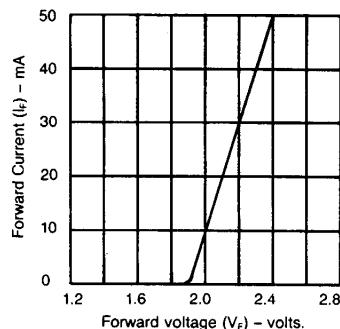


Fig. 1. Forward Current vs.
Forward Voltage

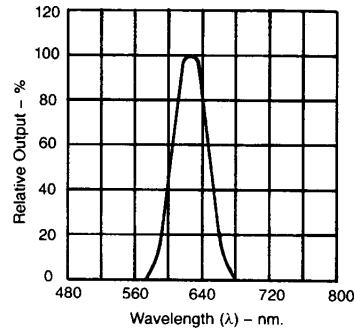


Fig. 2. Spectral Response

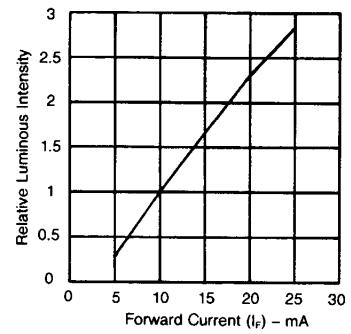


Fig. 3. Relative Luminous Intensity vs.
Forward Current

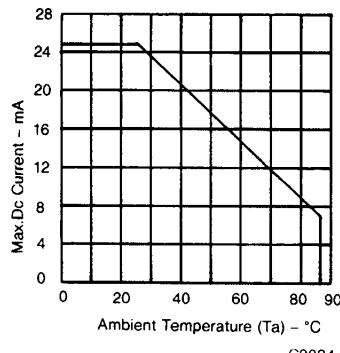


Fig. 4. Maximum Allowable
DC Current Per Segment vs.
A Function of Ambient
Temperature

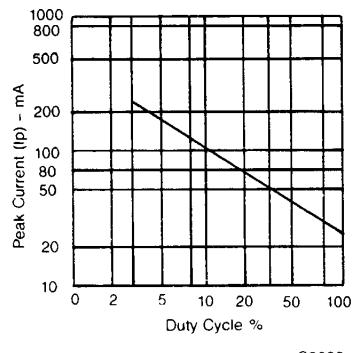


Fig. 5. Max. Peak Current vs.
Duty Cycle %
(Refresh Rate $f=1 \text{ KHz}$)

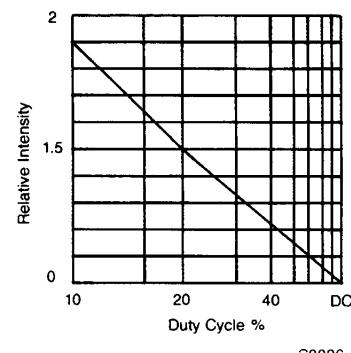


Fig. 6. Luminous Intensity vs.
Duty Cycle %



2.3" 5 × 8 DOT MATRIX DISPLAYS

ELECTRICAL/OPTICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise specified)

GMX 2885C

PARAMETER	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
Average luminous intensity	3000			μcd	$I_f=20 \text{ mA}$
Peak emission wavelength	585			nm	$I_f=20 \text{ mA}$
Spectral line half-width	30			nm	$I_f=20 \text{ mA}$
Forward voltage, any dot	2.1	2.8		V	$I_f=20 \text{ mA}$
Reverse voltage, any dot	100			μA	$V_R=5 \text{ V}$

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ Unless otherwise specified)

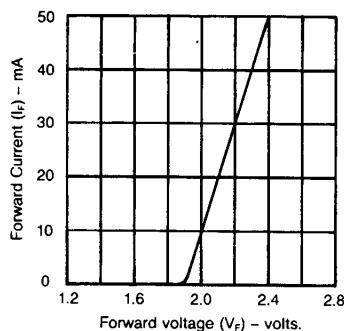


Fig. 1. Forward Current vs.
Forward Voltage

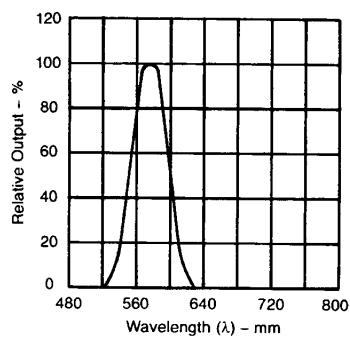


Fig. 2. Spectral Response

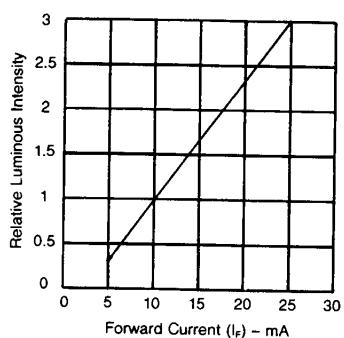


Fig. 3. Relative Luminous Intensity vs.
Forward Current

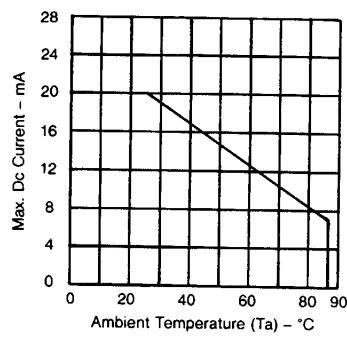


Fig. 4. Maximum Allowable
DC Current Per Segment vs.
A Function of Ambient
Temperature

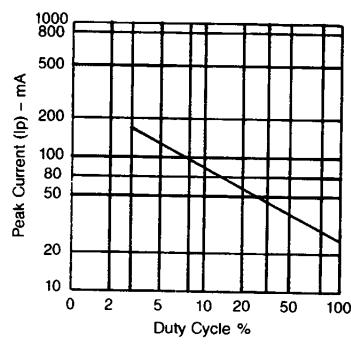


Fig. 5. Max Peak Current vs. Duty Cycle %
(Refresh Rate $f=1 \text{ KHz}$)

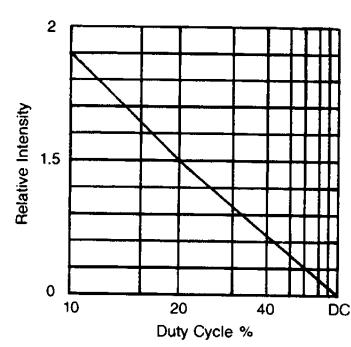



Fig. 6. Luminous Intensity vs.
Duty Cycle %
(Average 1=10 mA Per Seg.)



**2.3" 5 × 8
DOT MATRIX DISPLAYS**

PIN CONNECTION


PIN NO.	GMC2X85C	GMA2X85C	GMC2685C
1	Cathode row 6	Anode row 6	Cathode column 1 green
2	Cathode row 8	Anode row 8	Cathode column 2 green
3	Anode column 2	Cathode column 2	Cathode column 2 HER
4	Anode column 3	Cathode column 3	Cathode column 3 HER
5	Cathode row 5	Anode row 5	Anode row 6
6	Anode column 5	Cathode column 5	Anode row 7
7	Cathode row 7	Anode row 7	Cathode column 4 HER
8	Cathode row 3	Anode row 3	Anode row 5
9	Cathode row 1	Anode row 1	Anode row 8
10	Anode column 4	Cathode column 4	Cathode column 5 green
11	Anode column 3	Cathode column 3	Cathode column 5 HER
12	Cathode row 4	Anode row 4	Cathode column 4 green
13	Anode column 1	Cathode column 1	Anode column 3 green
14	Cathode row 2	Anode row 2	Anode row 4
15			Anode row 2
15			Anode row 1
15			Anode row 3
			Cathode column 1 HER




**2.3" 5 × 8
DOT MATRIX DISPLAYS**

INTERNAL CIRCUIT DIAGRAM

A. GMC2X85C

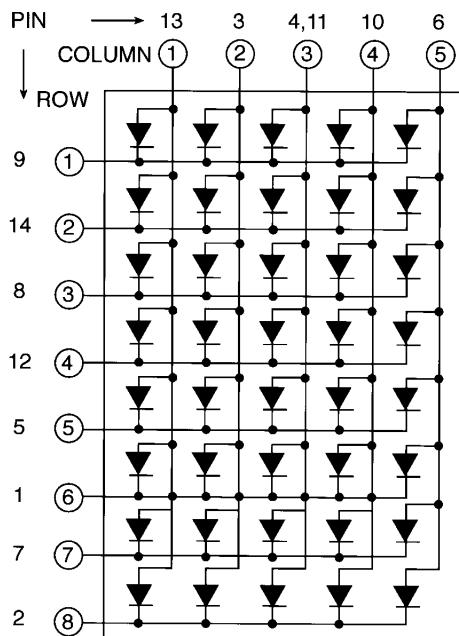

B. GMA2X85C

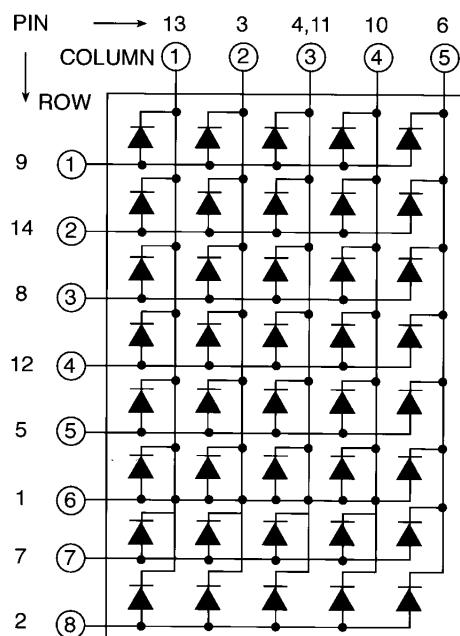

C. GMA2685C

