

# AP148 1 TO 200 MHz TO-8 CASCADABLE AMPLIFIER

**Typical Values** **AP148**  
**High Output Power** ..... > +25.0 dBm  
**High Third Order I.P.** ..... +43 dBm  
**High Performance Thin Film**  
**Standard Size TO-8**

## SPECIFICATIONS\*

Parameter	Typical	Guaranteed	
		0 to 50° C	-55 to 85° C
Frequency (Min.)	1-300 MHz	1-200 MHz	1-200 MHz
Small Signal Gain (Min.)	11.0 dB	10.5 dB	10.0 dB
Gain Flatness (Max.)	±0.2 dB	±0.4 dB	±0.6 dB
Noise Figure (Max.)	3.5 dB	4.2 dB	4.7 dB
SWR (Max.) Input/Output	<1.5:1	1.7:1	1.8:1
Power Output (Min.) @ 1dB comp.	> +25.0 <sup>^</sup> dBm	+24.5 <sup>^</sup> dBm	+24.0 <sup>^</sup> dBm
DC Current (Max.)	109.0 mA	115.0 mA	118.0 mA

\* Measured in a 50-ohm system at +15 Vdc unless otherwise specified.  
<sup>^</sup> 0.5 dB lower below 30 MHz.


## INTERMODULATION PERFORMANCE

**Typical @ 25° C; 100 MHz** **AP148**  
**Second Order Harmonic Intercept Point** ..... +65 dBm  
**Second Order Two Tone Intercept Point** ..... +59 dBm  
**Third Order Two Tone Intercept Point** ..... +43 dBm

## ABSOLUTE MAXIMUM RATINGS


**Storage Temperature** ..... -62 to 125° C  
**Maximum Case Temperature** ..... +125° C  
**Maximum DC Voltage** ..... +17 Volts  
**Maximum Continuous RF Input Power** ..... +17 dBm  
**Maximum Short Term Input Power (1 Minute Max.)** ..... 100 Milliwatts  
**Maximum Peak Power (3 μsec Max.)** ..... 0.5 Watt  
**Burn-in Temperature** ..... +100° C  
**Thermal Resistance<sup>1</sup> (θjc)** ..... +23° C/Watt  
**Junction Temperature Rise Above Case (Tjc)** ..... +39.6° C

<sup>1</sup> Thermal resistance is based on total power dissipation.

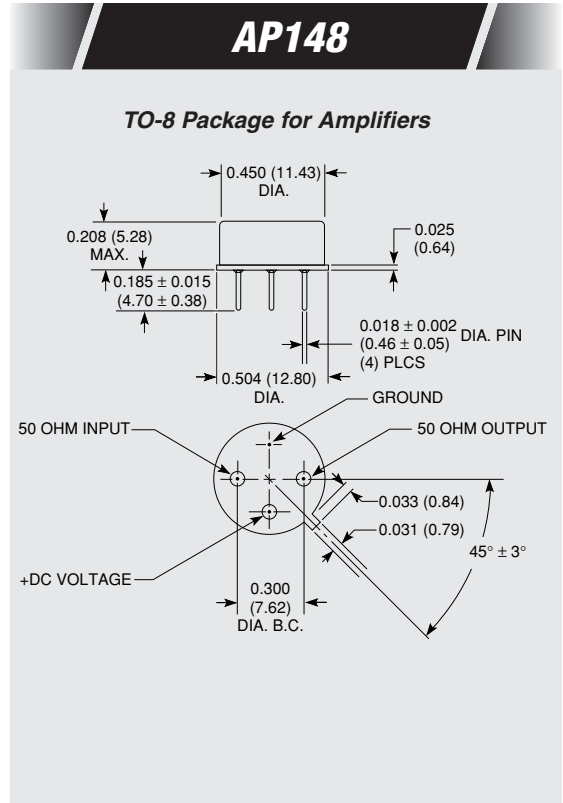

## APS148

### SMT0-8 Package for Amplifiers





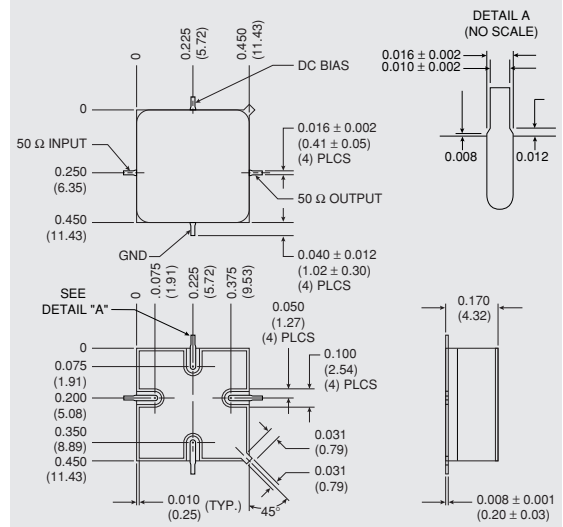


**If DC is present on RF input/output, this model requires additional external blocking capacitors.**

DIMENSIONS ARE IN INCHES (MILLIMETERS)



## TYPICAL PERFORMANCE

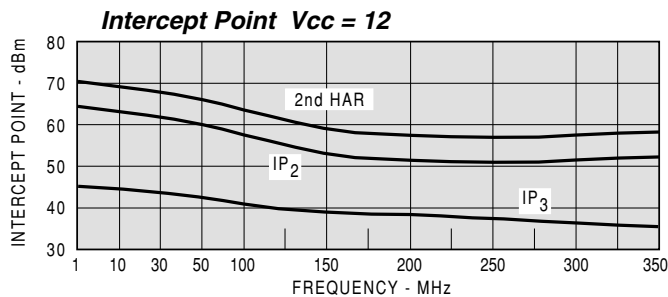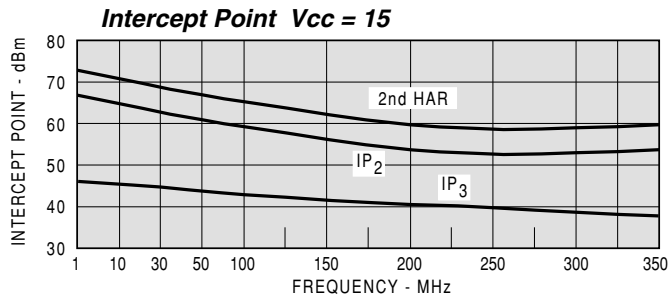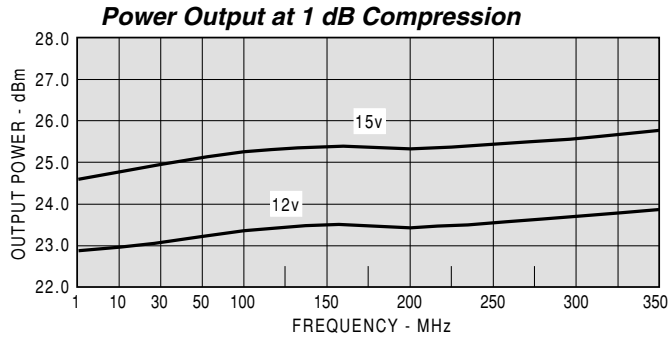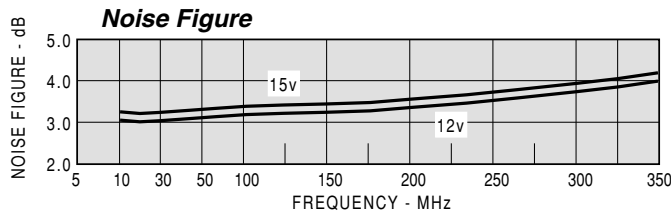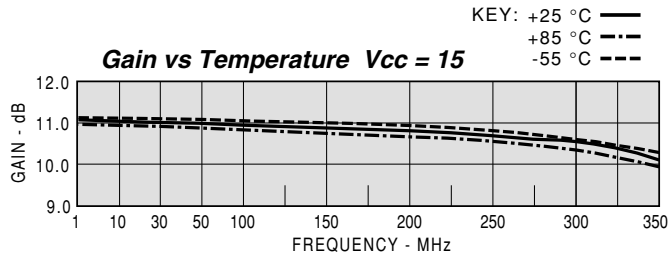

## TYPICAL AUTOMATIC TEST DATA

Model: AP148 Vcc=+15V Icc=108.29

FREQ MHz	SWR IN	SWR OUT	GAIN DB	DELAY NSEC	REV/ISO DB
0.5	1.65	2.42	10.1		-14.0
1	1.19	1.32	11.4		-17.4
5	1.02	1.08	11.3	8.187	-18.7
10	1.01	1.07	11.3	1.511	-18.8
50	1.02	1.07	11.2	0.811	-18.9
100	1.05	1.09	11.2	0.741	-18.9
150	1.12	1.09	11.1	0.749	-19.0
200	1.23	1.09	11.1	0.771	-19.1
250	1.40	1.12	11.0	0.816	-19.2
300	1.67	1.23	10.7	0.866	-19.5

Model: AP148 Vcc=+15V Icc=108.29

LINEAR S-PARAMETERS

FREQ. MHz	S11 MAG	S11 ANG	S21 MAG	S21 ANG	S12 MAG	S12 ANG	S22 MAG	S22 ANG
0.5	0.24	-48.9	3.18	-144.1	0.199	171.0	0.42	176.6
1.0	0.09	-95.1	3.74	-167.1	0.135	164.0	0.14	109.9
5	0.01	-104.8	3.69	-178.9	0.116	175.0	0.04	50.9
10	0.00	-89.6	3.68	-178.5	0.115	175.0	0.03	32.6
50	0.01	-91.3	3.65	-167.4	0.114	166.0	0.04	17.3
100	0.03	-135.4	3.62	-154.8	0.113	153.0	0.04	8.2
150	0.06	-157.9	3.60	-142.0	0.112	139.0	0.04	-12.4
200	0.10	-175.0	3.58	-128.9	0.111	125.0	0.04	-50.5
250	0.17	-169.1	3.53	-114.9	0.109	110.0	0.06	-102.2
300	0.25	-153.9	3.44	-100.0	0.106	94.0	0.10	-143.4
350	0.35	-138.4	3.26	-84.2	0.099	77.0	0.18	-172.1
350	0.46	-122.6	2.98	-67.8	0.090	58.0	0.27	-164.5

Model: AP148 Vcc=+12V Icc=85.17

FREQ MHz	SWR IN	SWR OUT	GAIN DB	DELAY NSEC	REV/ISO DB
0.5	1.47	1.93	11.2		-14.8
1	1.14	1.23	11.4		-17.7
5	1.01	1.07	11.3	7.102	-18.8
10	1.01	1.07	11.3	1.432	-18.8
50	1.02	1.08	11.2	0.807	-18.9
100	1.06	1.09	11.2	0.743	-18.9
150	1.12	1.10	11.1	0.752	-19.0
200	1.24	1.10	11.1	0.775	-19.1
250	1.42	1.13	10.9	0.820	-19.2
300	1.69	1.24	10.7	0.871	-19.5

Model: AP148 Vcc=+12V Icc=85.17

LINEAR S-PARAMETERS

FREQ. MHz	S11 MAG	S11 ANG	S21 MAG	S21 ANG	S12 MAG	S12 ANG	S22 MAG	S22 ANG
0.5	0.19	-71.2	3.65	-150.1	0.183	165.0	0.32	156.7
1.0	0.06	-100.5	3.72	-169.0	0.130	165.0	0.10	102.9
5	0.01	-105.6	3.68	-179.1	0.115	175.0	0.04	41.3
10	0.00	-79.7	3.67	-178.4	0.115	176.0	0.03	25.9
50	0.01	-90.5	3.64	-167.3	0.114	166.0	0.04	13.6
100	0.03	-133.7	3.61	-154.6	0.113	153.0	0.04	4.6
150	0.06	-157.0	3.59	-141.8	0.112	139.0	0.05	-15.8
200	0.11	-174.4	3.57	-128.6	0.111	125.0	0.05	-53.2
250	0.17	-169.6	3.52	-114.5	0.109	110.0	0.06	-102.8
300	0.26	-154.1	3.42	-99.6	0.106	94.0	0.11	-143.2
350	0.36	-138.6	3.24	-83.7	0.099	76.0	0.18	-171.9
350	0.46	-122.7	2.96	-67.3	0.090	58.0	0.27	-164.6