

GHB-3M35-YG

Features


- ✓ LOW POWER CONSUMPTION.
- ✓ POPULAR T-1 DIAMETER PACKAGE.
- ✓ GENERAL PURPOSE LEADS.
- ✓ RELIABLE AND RUGGED.
- ✓ LONG LIFE - SOLID STATE RELIABILITY.

Description

The Green source color devices are made with InGaAlP on GaAs substrate Light Emitting Diode.

T-1 (3mm) SOLID STATE LAMP

Package Dimensions

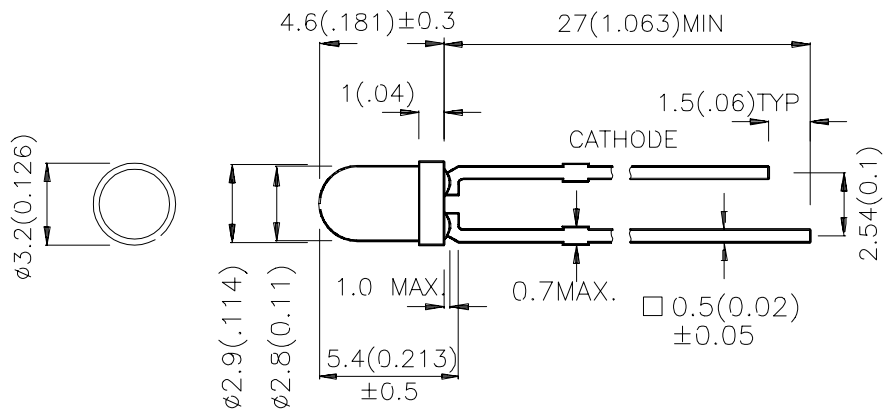

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $0.25 (0.01)$ " unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subject to change without notice.

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) @ 20mA		Viewing Angle
			Min.	Typ.	
GHB-3M35-YG	GREEN (InGaAlP)	WATER CLEAR	110	350	34°

Note:

1. 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Electrical / Optical Characteristics at T_A=25 C


Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
peak	Peak Wavelength	Green	574		nm	I _F = 20mA
D	Dominate Wavelength	Green	570		nm	I _F = 20mA
1/2	Spectral Line Half-width	Green	20		nm	I _F = 20mA
C	Capacitance	Green	15		pF	V _F = 0V; f = 1MHz
V _F	Forward Voltage	Green	2.1	2.5	V	I _F = 20mA
I _R	Reverse Current	Green		10	uA	V _R = 5V

Absolute Maximum Ratings at T_A=25 C


Parameter	Green	Units
Power dissipation	105	mW
DC Forward Current	30	mA
Peak Forward Current [1]	150	mA
Reverse Voltage	5	V
Operating/Storage Temperature	-40 C To +85 C	
Lead Solder Temperature [2]	260 C For 5 Seconds	

Notes:


1. 1/10 Duty Cycle, 0.1ms Pulse Width.
2. 2mm below package base.

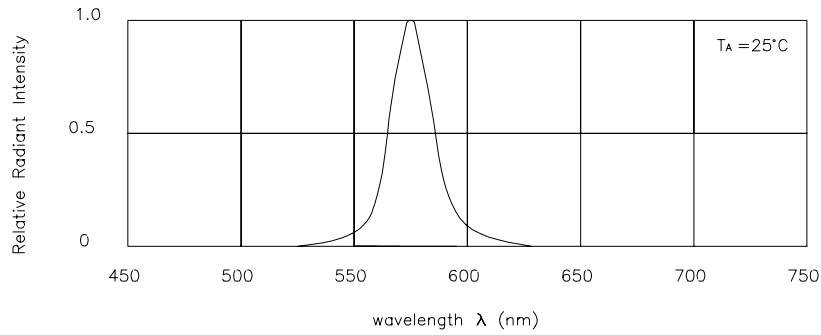


RELATIVE INTENSITY Vs. WAVELENGTH




FORWARD CURRENT Vs. FORWARD VOLTAGE




LUMINOUS INTENSITY Vs. FORWARD CURRENT



FORWARD CURRENT DERATING CURVE

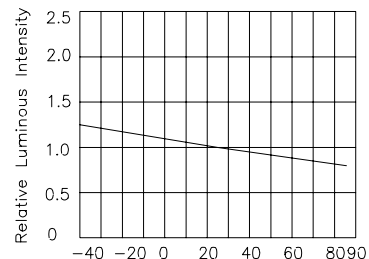

LUMINOUS INTENSITY Vs. AMBIENT TEMPERATURE



SPATIAL DISTRIBUTION