


TYPICAL PERFORMANCE

PRELIMINARY

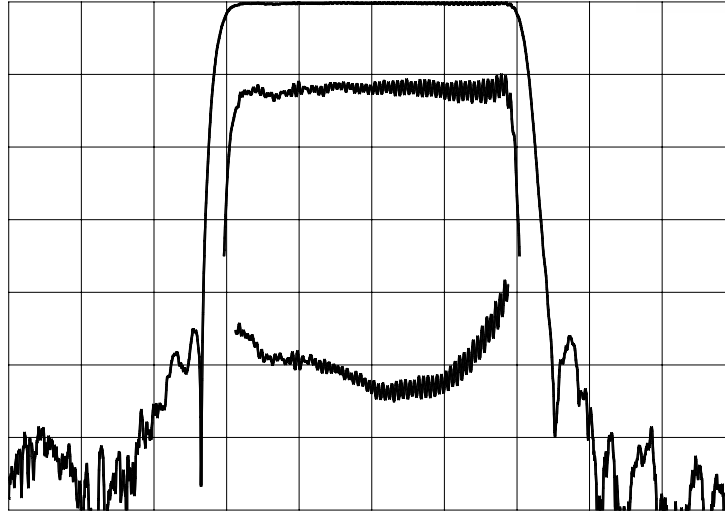

Horizontal: 8 MHz/div

Vertical (from top): Magnitude 10 dB/div
Magnitude 1 dB/div
Phase Deviation 5 deg/div




SPECIFICATION

Parameter	Min	Typ	Max	Units
Center Frequency (Fc) ¹		87.5		MHz
Insertion Loss ^{2,5}		16	18	dB
Lower 1 dB Frequency ⁴		71.7	72.5	MHz
Upper 1 dB Frequency ⁴	102.5	103.4		MHz
Passband Ripple ^{6,4}		0.6	1.0	dB
Passband Ripple, extended temperature range ^{3,5}			1.5	dB
Phase Deviation from Linear ^{3,5}		9	14	deg
Lower 40 dB Frequency ⁴	67.5	68.9		MHz
Upper 40 dB Frequency ⁴		106.9	107.5	MHz
Lower 38 dB Frequency ⁵	67.5	69.0		MHz
Upper 38 dB Frequency ⁵		106.7	107.5	MHz
Absolute Delay		1.0	1.2	µs
Operating Temperature Range	0		70	°C
Extended Operating Temperature Range	-20		85	°C
System Source and Load Impedance		50		Ω

- Notes:
1. Average of lower & upper 3 dB frequencies (3 dB measured from peak).
 2. Measured at 87.5 MHz.
 3. Evaluated over 87.5 ± 15 MHz.
 4. Limit met over operating temperature range.
 5. Limit met over extended operating temperature range.
 6. Evaluated over 87.5 ± 14.5 MHz

PACKAGE OUTLINE

PRELIMINARY

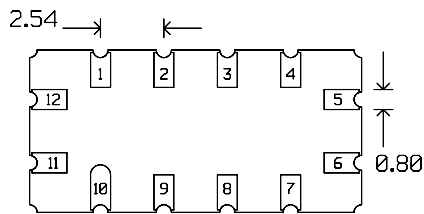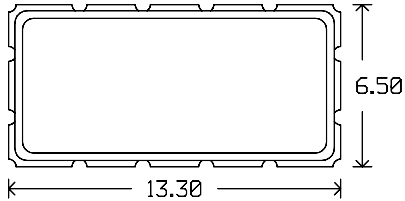


Units: mm

Pin Configuration:

Input: 11
Output: 5
Ground: 1,2,3,4,6,7,8,9,10,12

MATCHING CIRCUIT

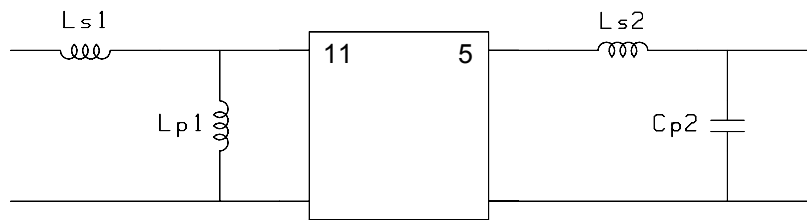

Component values in 50 Ω: Lp1 = 91 nH Ls2 = 120 nH
(Minimum Q = 45) Ls1 = 100 nH Cp2 = 22 pF

Notes

- Optimum component values may change depending on board layout. The values shown here are intended as a guide only.
- Requires 2% matching components.

ISO 9001
Registered