

isc Silicon PNP Power Transistor

2SA1116

DESCRIPTION



- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = -200V(\text{Min.})$
- High Power Dissipation
- Complement to Type 2SC2607

APPLICATIONS

- Designed for general purpose applications.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-200	V
V_{CEO}	Collector-Emitter Voltage	-200	V
V_{EBO}	Emitter-Base Voltage	-6	V
I_C	Collector Current-Continuous	-15	A
I_B	Base Current-Continuous	-5	A
P_C	Collector Power Dissipation @ $T_c=25^\circ\text{C}$	150	W
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-65~150	$^\circ\text{C}$

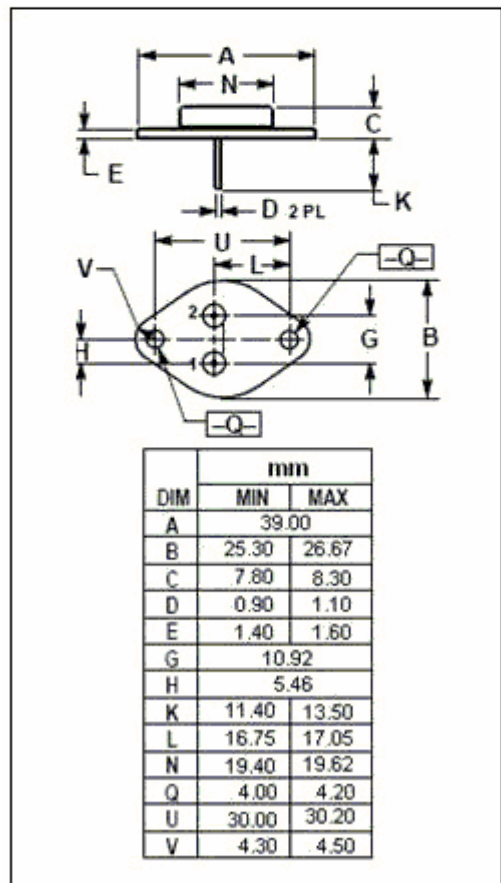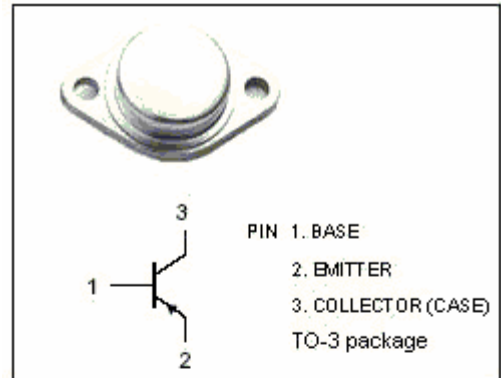

isc Silicon PNP Power Transistor**2SA1116****ELECTRICAL CHARACTERISTICS****T_j=25°C unless otherwise specified**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = -50mA; I _B = 0	-200			V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = -10A; I _B = -1A			-3.0	V
I _{CBO}	Collector Cutoff Current	V _{CB} = -200V; I _E = 0			-100	μ A
I _{EBO}	Emitter Cutoff Current	V _{EB} = -6V; I _C = 0			-100	μ A
h _{FE}	DC Current Gain	I _C = -5A ; V _{CE} = -4V	30			
f _T	Current-Gain—Bandwidth Product	I _E = 0.5A; V _{CE} = -12V		20		MHz

Switching Times

t _r	Rise Time	I _C = -5A, R _L = 12 Ω, I _{B1} = -I _{B2} = -0.5A, V _{CC} = -60V		0.3		μ s
t _{stg}	Storage Time			0.9		μ s
t _f	Fall Time			0.2		μ s