


<b>SCHOTTKY BARRIER RECTIFIERS</b>	<b>REVERSE VOLTAGE - 30 to 100Volts</b> <b>FORWARD CURRENT - 10.0 Amperes</b>
------------------------------------	--

### FEATURES

- Metal of silicon rectifier , majority carrier conduction
- Guard ring for transient protection
- Low power loss,high efficiency
- High current capability,low VF
- High surge capacity
- For use in low voltage,high frequency inverters,free wheeling,and polarity protection applications

### MECHANICAL DATA

- Case: JEDEC DO-27 molded plastic
- Polarity: Color band denotes cathode
- Weight: 0.04ounces , 1.1grams
- Mounting position: Any

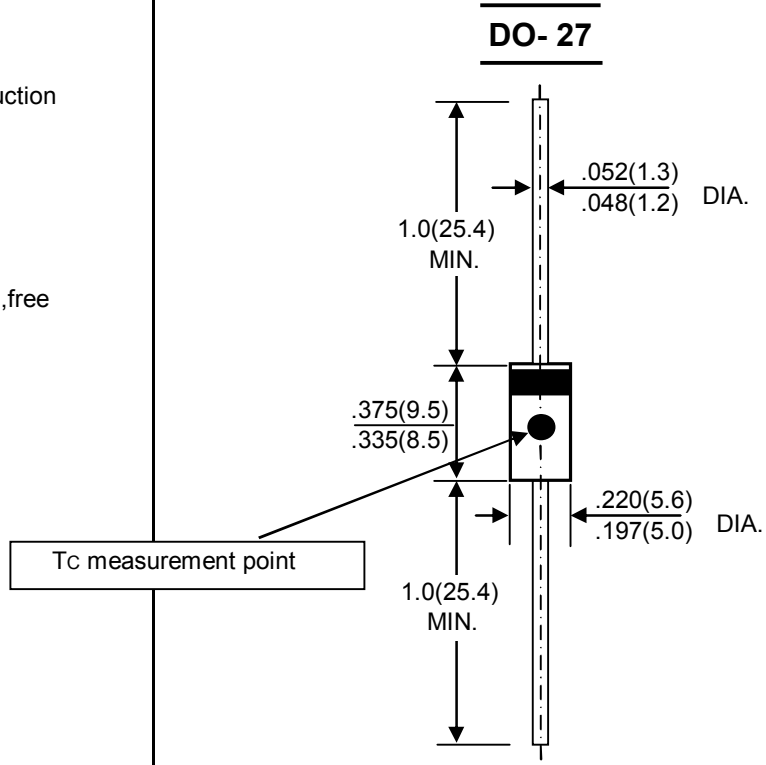

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	SQ1030	SQ1035	SQ1040	SQ1045	SQ1050	SQ1060	SQ1080	SQ10100	UNIT	
Maximum Recurrent Peak Reverse Voltage	VRRM	30	35	40	45	50	60	80	100	V	
Maximum RMS Voltage	VRMS	21	24.5	28	31.5	35	42	56	70	V	
Maximum DC Blocking Voltage	VDC	30	35	40	45	50	60	80	100	V	
Maximum Average Forward Rectified Current @Tc=95 °C	I(AV)	10								A	
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load(JEDEC Method)	IFSM	275								A	
Peak Forward Voltage at 10A DC(Note1)	VF	0.55			0.7		0.8			V	
Maximum DC Reverse Current @Tj=25°C at Rated DC Bolcking Voltage @Tj=100°C	IR	0.5				50					mA
Typical Junction Capacitance (Note2)	CJ	450								pF	
Typical Thermal Resistance (Note3)	RθJC	3.0								°C/w	
Operating Temperature Range	TJ	-55 to+200								°C	
Storage Temperature Range	TSTG	-55 to+200								°C	

NOTES:1.300us Pulse Width, 2%Duty Cycle.

2.Measured at 1.0 MHZ and applied reverse voltage of 4.0VDC.

3.Thermal Resistance Junction to case.

# RATING AND CHARACTERISTIC CURVES

## SQ1030 thru SQ10100



FIG.1-FORWARD CURRENT DERATING CURVE

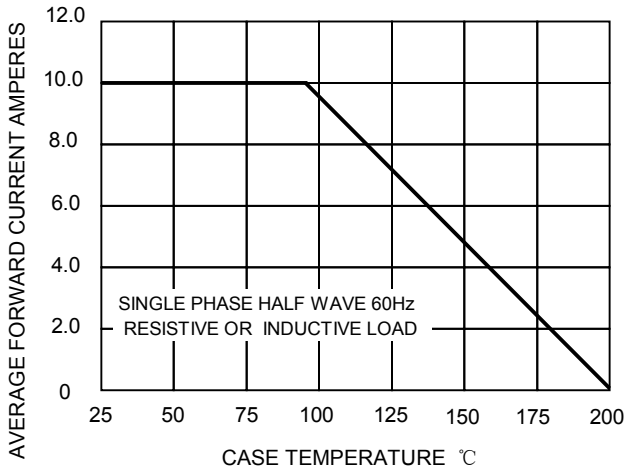


FIG.2-MAXIMUM NON-REPETITIVE SURGE

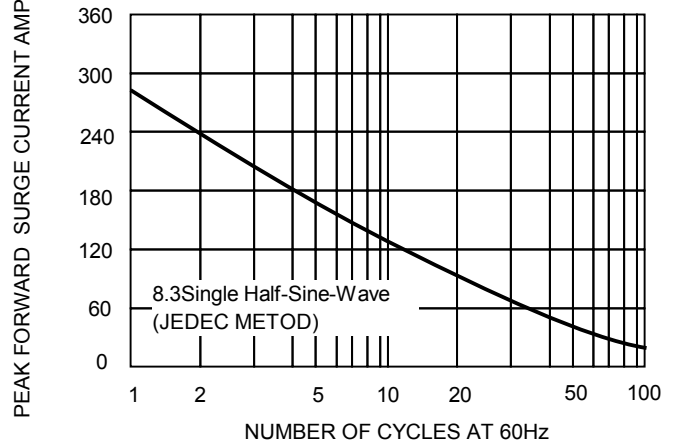


FIG.3-TYPICAL REVER CHARACTERISTICS

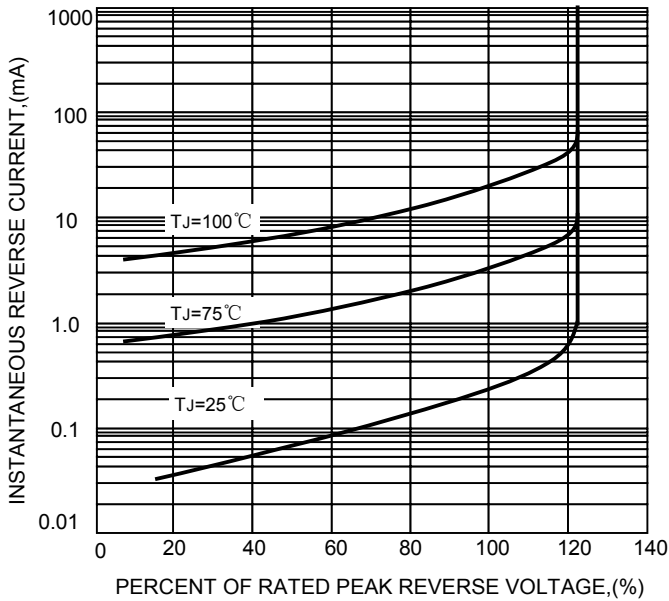


FIG.4-TYPICAL FORWARD CHARACTERISTICS

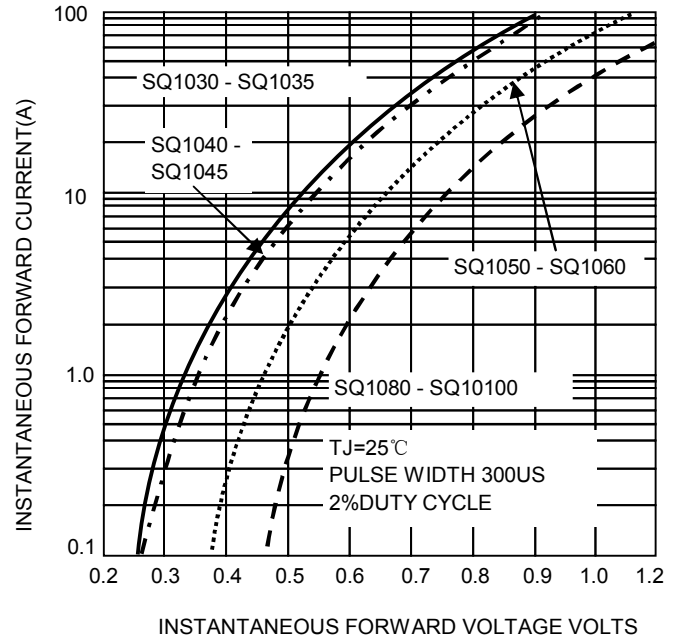


FIG.5-TYPICAL JUNCTION CAPACITANCE

