



Description

The 250S High Voltage Radial device is a Polymer-based PTC suitable to protect telephony equipment against lightning and power cross strikes. The 250S Series is fully compatible with telecommunications standards.

PRELIMINARY DATA SHEET: This product is scheduled for release by end of 2008 and specifications may change. Please refer to www.littelfuse.com/series/250S.html for the current information.


Features

- RoHS Compliant, Directive 2002/95/EC
- Low resistance
- Compatible with telecom standards
- Helps meet ITU K.20, K.21/Telcordia standards
- Excellent solder joint inspectability
- High voltage


Applications

- Telecommunications
- Networking
- ISDN Equipment
- XSDN Equipment

Agency Approvals

AGENCY	AGENCY FILE NUMBER
	Pending

Electrical Characteristics

Part Number	I _{hold} (A)	I _{trip} (A)	V _{max} (V _{int} /V _{op})	I _{max} (A)	P _d typ. (W)	Time to Trip at 1A		Resistance			Agency Approvals
						Typical (Sec.)	Maximum (Sec.)	R _{min} (Ω)	R _{max} (Ω)	R _{1max} (Ω)	
250S130	0.13	0.26	250/60	3	1.2	0.9	4.0	4.0	13	20	–
250S130-RA	0.13	0.26	250/60	3	1.2	1.4	4.0	6.5	10	15	–
250S130-RB	0.13	0.26	250/60	3	1.2	0.7	4.0	9	13	20	–
250S130-RC	0.13	0.26	250/60	3	1.2	1.1	4.0	7	11	17	–


I_{hold} = Hold current: maximum current device will pass without tripping in 23°C still air.
 I_{trip} = Trip current: minimum current at which the device will trip in 23°C still air.
 V_{int} = Maximum voltage the device can withstand without damage at rated current (I_{max})
 V_{op} = The device regular operation voltage
 I_{max} = Maximum fault current device can withstand without damage at rated voltage (V_{max})
 P_d = Power dissipated from device when in the tripped state at 23°C still air.

R_{min} = Minimum resistance of device in initial (un-soldered) state.
 R_{max} = Maximum resistance of device in initial (un-soldered) state.
 R_{1max} = Maximum resistance of device at 20°C measured one hour after tripping.
Caution: Operation beyond the specified rating may result in damage and possible arcing and flame.


Temperature Derating

Part Number	Ambient Operation Temperature								
	-40°C	-20°C	0°C	23°C	40°C	50°C	60°C	70°C	85°C
250S130	0.21	0.19	0.17	0.13	0.11	0.10	0.09	0.07	0.05

Average Time Current Curves

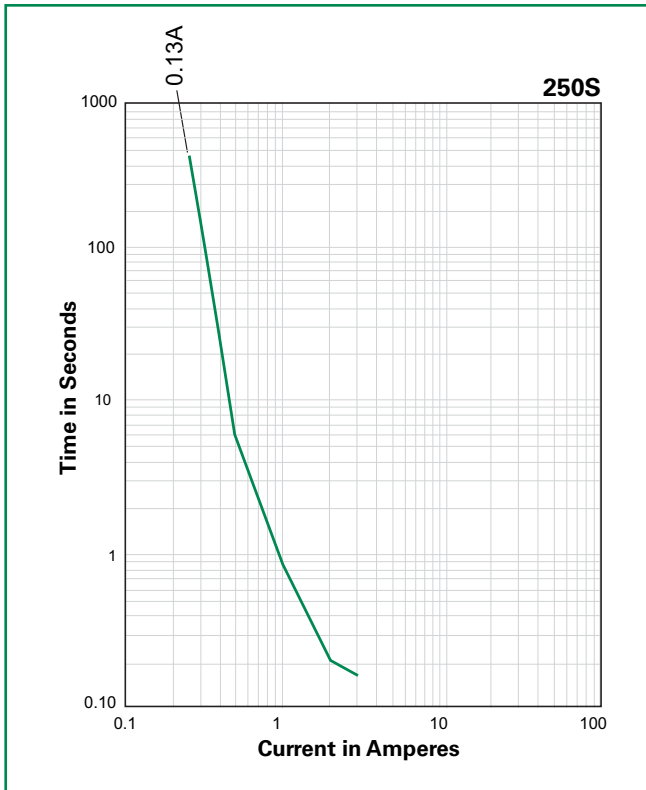

Temperature Derating Curve

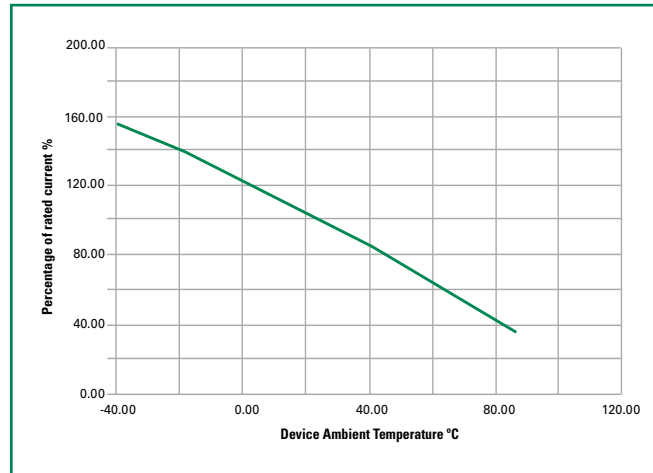

Agency Specification Selection Guide For Telecom and Networking Applications

Product	Lightning	Power Cross
250S130		
250S130-RA	ITU K.20/21/45 –	ITU K.20/21/45 –
250S130-RB	1.5kV 10/700µs	230Vac, 10Ω
250S130-RC		


Protection Application Guide

Region/ Specification	Application	Device Selection
South America/ Asia/Europe ITU K.45	Access network equipment Remote terminal Repeaters WAN equipment Cross –connect	250S130 250S130-RA 250S130-RB 250S130-RC
South America/ Asia/Europe ITU K.21	Customer and IT equipment Analog modems ADSL, xDSL Phone sets, PBX systems Internet appliances POS terminals	250S130 250S130-RA 250S130-RB 250S130-RC
South America/ Asia/Europe ITU K.20	Central Office POTS/ISDN linecards T1/E1/J1 linecards ADSL/VDSL splitters CSU/DSU	250S130 250S130-RA 250S130-RB 250S130-RC

The average time current curves and Temperature Derating curve performance is affected by a number of variables, and these curves provided as guidance only. Customer must verify the performance in their application.

Soldering Parameters

Profile Feature		Pb-Free Assembly
Average Ramp-Up Rate ($T_{s(max)}$ to T_p)		3°C/second max
Pre Heat:	Temperature Min ($T_{s(min)}$)	150°C
	Temperature Max ($T_{s(max)}$)	200°C
	Time (Min to Max) (t_s)	60 – 180 secs
Time Maintained Above:	Temperature (T_L)	217°C
	Temperature (t_L)	60 – 150 seconds
Peak / Classification Temperature (T_p)		260 ^{+0/-5} °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max.

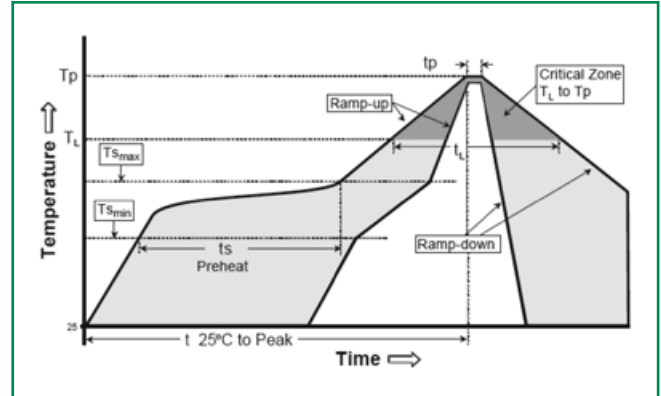

- All temperature refer to topside of the package, measured on the package body surface
- If reflow temperature exceeds the recommended profile, devices may not meet the performance requirements
- Recommended reflow methods: IR, vapor phase oven, hot air oven, N₂ environment for lead
- Recommended maximum paste thickness is 0.25mm (0.010inch)
- Devices can be cleaned using standard industry methods and solvents
- Devices can be reworked using the standard industry practices


Physical Specifications

Terminal Material	Solder-Plated Copper (Solder Material: Matte Tin(Sn))
Lead Solderability	Meets EIA Specification RS186-9E, ANSI/J-STD-002 Category 3.

Environmental Specifications


Operating/Storage Temperature	-40°C to +85°C
Maximum Device Surface Temperature in Tripped State	125°C +/-10°C
Passive Aging	+85°C, 1000 hours
Humidity Aging	+85°C, 85%, R.H., 1000 hours
Thermal Shock	MIL-STD-202F, Method 107G +125°C to -55°C 10 times
Solvent Resistance	MIL-STD-202, Method 215F
Moisture Sensitivity Level	Level 1, J-STD-020C

Dimensions

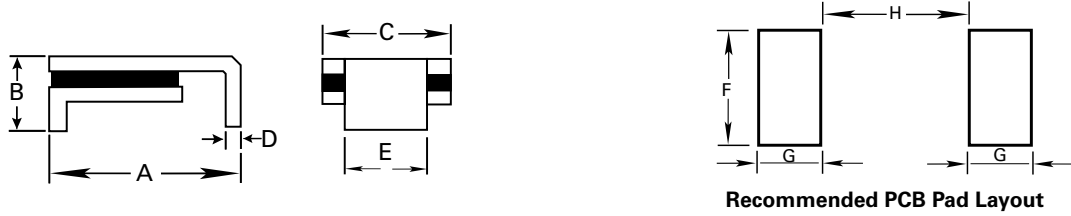

Part Number	A		B		C		D		E		Physical Characteristics Material	F		G		H	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm		Inch	mm	Inch	mm	Inch	mm
	Max.	Max.	Max.	Max.	Max.	Max.	Max.	Max.	Max.	Max.		Max.	Max.	Max.	Max.	Max.	Max.
250S130	0.37	9.4	0.15	3.7	0.29	7.4	0.016	0.4	0.15	3.8	Sn/Ni/Cu	0.18	4.6	0.07	1.8	0.24	6.1
250S130-RA	0.37	9.4	0.15	3.7	0.29	7.4	0.016	0.4	0.15	3.8	Sn/Ni/Cu	0.18	4.6	0.07	1.8	0.24	6.1
250S130-RB	0.37	9.4	0.15	3.7	0.29	7.4	0.016	0.4	0.15	3.8	Sn/Ni/Cu	0.18	4.6	0.07	1.8	0.24	6.1
250S130-RC	0.37	9.4	0.15	3.7	0.29	7.4	0.016	0.4	0.15	3.8	Sn/Ni/Cu	0.18	4.6	0.07	1.8	0.24	6.1

Part Ordering Number System

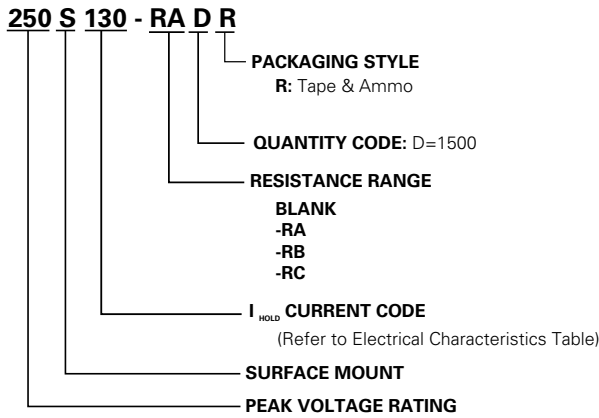

Packaging

Part Number	Ordering Number	I _{hold} (A)	I _{hold} Code	Packaging Option	Quantity	Quantity & Packaging Code
250S130	250S130DR	0.13	130	Tape and Reel	1500	DR
250S130-RA	250S130-RADR	0.13	130	Tape and Reel	1500	DR
250S130-RB	250S130-RBDR	0.13	130	Tape and Reel	1500	DR
250S130-RC	250S130-RCDR	0.13	130	Tape and Reel	1500	DR

Tape and Reel Specifications

TAPE SPECIFICATIONS: EIA-481-1 (mm)	
W	16 +/-0.30
F	7.5 +/-0.05
E₁	1.75 +/-0.10
D₀	1.5 +/-0.05
D₁	1.00(MIN)
P₀	4.00 +/-0.10
P₁	12.00 +/-0.10
P₂	2.00 +/-0.05
A₀	6.9 +/-0.10
B₀	9.6 +/-0.10
T_{max}	0.4 +/-0.10
K₀	3.4 +/-0.15
Leader Min.	300
Trailer Min.	300

REEL DIMENSIONS: EIA-481-1 (mm)	
H	22.4 +/-0.05
W	16.4 .0 +0/+2
D	Ø60+0.5
F	Ø13.0+/-0.2
C	Ø340+/-1.0
H₁	11+/-0.5
W₁	2.2+/-0.5
W₂	3.0+0.5
W₃	4.0+0.5
W₄	5.5+0.5

Tape and Reel Diagram

