

FAST RECOVERY RECTIFIER

VOLTAGE RANGE 400 to 1000 Volts CURRENT 1.0 Ampere

FEATURES


- * Fast switching
- * Low leakage
- * Low forward voltage drop
- * High current capability
- * High surge capability
- * High reliability

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: Device has UL flammability classification 94V-0
- * Lead: MIL-STD-202E method 208C guaranteed
- * Mounting position: Any
- * Weight: 0.33 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

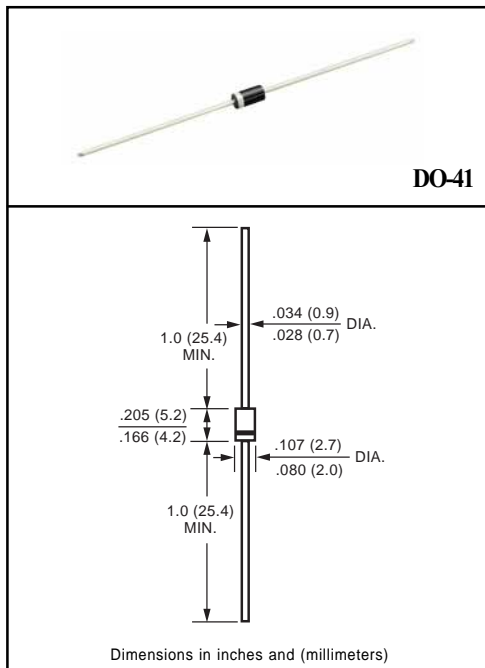

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	BA157	BA158	BA159	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	400	600	1000	Volts
Maximum RMS Voltage	VRMS	280	420	700	Volts
Maximum DC Blocking Voltage	VDC	400	600	1000	Volts
Maximum Average Forward Rectified Current at TA = 75°C	IO	1.0			Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	30			Amps
Typical Junction Capacitance (Note 2)	CJ	15			pF
Operating and Storage Temperature Range	TJ, TSTG	-65 to +150			°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	BA157	BA158	BA159	UNITS
Maximum Instantaneous Forward Voltage at 1.0A DC	VF	1.3			Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage TA = 25°C	IR	5.0			uAmps
Maximum Full Load Reverse Current Full Cycle Average, .375" (9.5mm) lead length at TL = 55°C		100			uAmps
Maximum Reverse Recovery Time (Note 1)	trr	250			nSec

NOTES : 1. Test Conditions: IF = 0.5A, IR = -1.0A, IRR = -0.25A
 2. Measured at 1 MHz and applied reverse voltage of 4.0 volts

RATING AND CHARACTERISTIC CURVES (BA157 THRU BA159)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

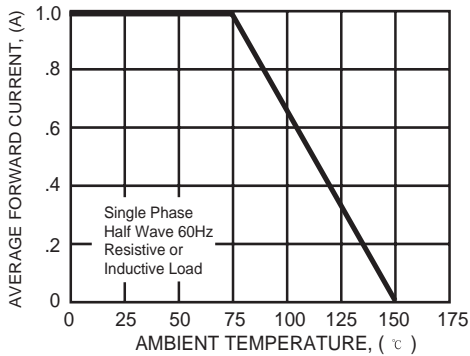


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

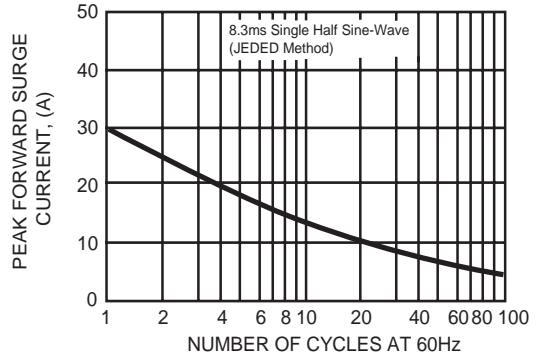


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

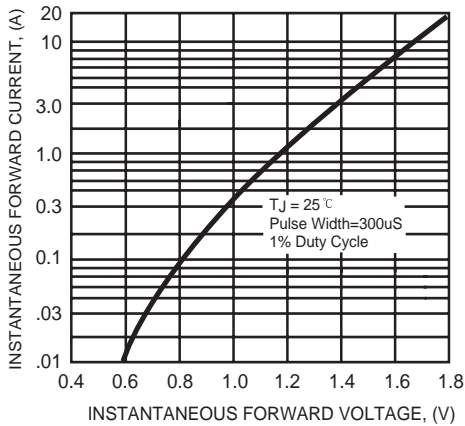


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

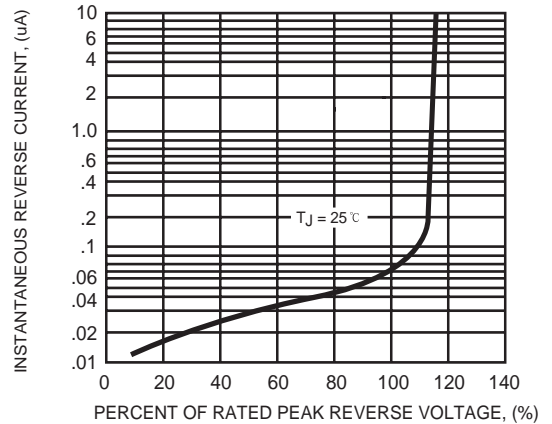


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

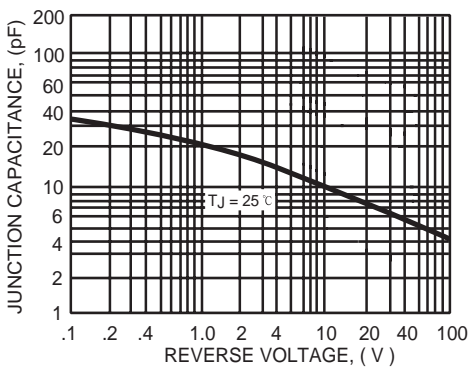


FIG. 6 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

