



Surface Mount Schottky Barrier Diode Arrays

KAT54TW,ADW,CDW,SDW,BRW

(BAT54TW,ADW,CDW,SDW,BRW)

■ Features

- Low Forward Voltage Drop
- Fast Switching
- Ultra-Small Surface Mount Package
- PN Junction Guard Ring for Transient and ESD Protection

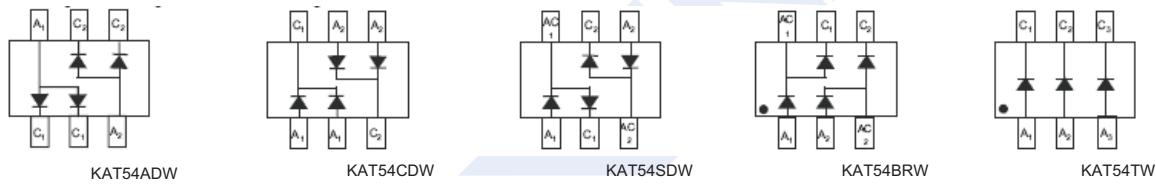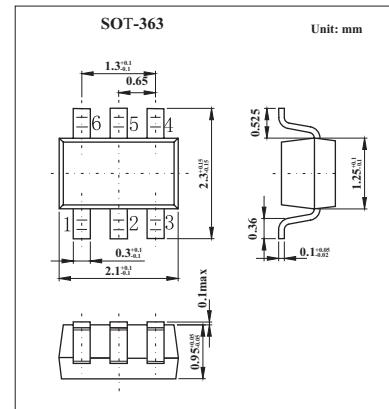

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V _{RRM}		
Working Peak Reverse Voltage	V _{RWM}	30	V
DC Blocking Voltage	V _R		
Forward Continuous Current *	I _F	200	mA
Repetitive Peak Forward Current *	I _{FRM}	300	mA
Forward Surge Current * @ t < 1.0s	I _{FSM}	600	mA
Power Dissipation*	P _d	200	mW
Thermal Resistance, Junction to Ambient Air*	R _{θ JA}	625	°C/W
Operating and Storage Temperature Range	T _j , T _{TSG}	-65 to +125	°C

*. Device mounted on FR-4 PCB, 1 inch X 0.85 inch X 0.062 inch;

KAT54TW,ADW,CDW,SDW,BRW (BAT54TW,ADW,CDW,SDW,BRW)

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Reverse Breakdown Voltage *	V _{(BR)R}	I _R =100 μ A	30			V
Maximum Forward Voltage *	V _{FM}	I _F = 0.1mA I _F = 1mA I _F = 10mA I _F = 30mA I _F = 100mA			240 320 400 500 1000	mV
Peak Reverse Current 8	I _R	V _R = 25V			2.0	μ A
Junction Capacitance	C _j	V _R = 1.0V, f = 1.0MHz			10	pF
Reverse Recovery Time	t _{rr}	I _F = 10mA through I _R = 10mA to I _R = 1.0mA, R _L = 100 Ω			5	ns

* Short duration test pulse used to minimize self-heating effect.

■ Marking

NO.	KAT54ADW	KAT54CDW	KAT54SDW	KAT54BRW	KAT54TW
Marking	KL6	KL7	KL8	KLB	KLA