

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0901420014](#)
Status: **Active**
Overview: [cgrid_iii](#)
Description: 2.54mm (.100") Pitch C-Grid III™ Crimp Housing - Dual Row, 14 Circuits

Documents:

[3D Model](#) [Product Specification PS-99020-0001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Crimp Housings
Series	90142
MolexKits	Yes
Overview	cgrid_iii
Product Name	C-Grid III™

Physical

Breakaway	No
Circuits (maximum)	14
Color - Resin	Black
Gender	Female
Glow-Wire Compliant	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Resin	PPO
Number of Rows	2
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Pitch - Term. Interface (in)	0.100 In
Pitch - Term. Interface (mm)	2.54 mm
Polarized to Mating Part	Yes
Ports	0
Stackable	No
Temperature Range - Operating	-55°C to +105°C


Electrical

Current - Maximum per Contact	3A
-------------------------------	----

Material Info

Reference - Drawing Numbers

Product Specification	PS-99020-0001
Sales Drawing	SD-90142

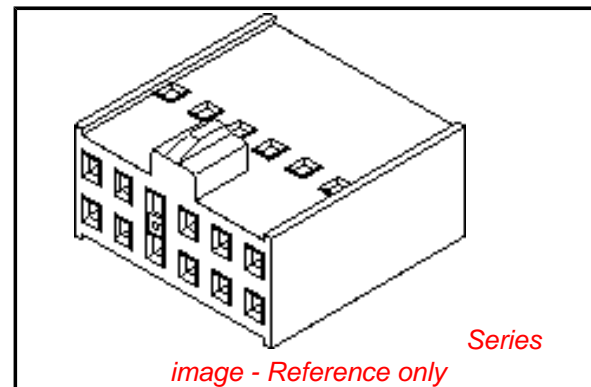

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
 Not Reviewed
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of
 Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
 non-product compliance questions.

Search Parts in this Series


[90142Series](#)

Mates With

C-Grid III™ Header, Dual Row [90122](#) ,
[90130](#) , [90131](#)

Use With

C-Grid III™ Crimp Terminal [90119](#)

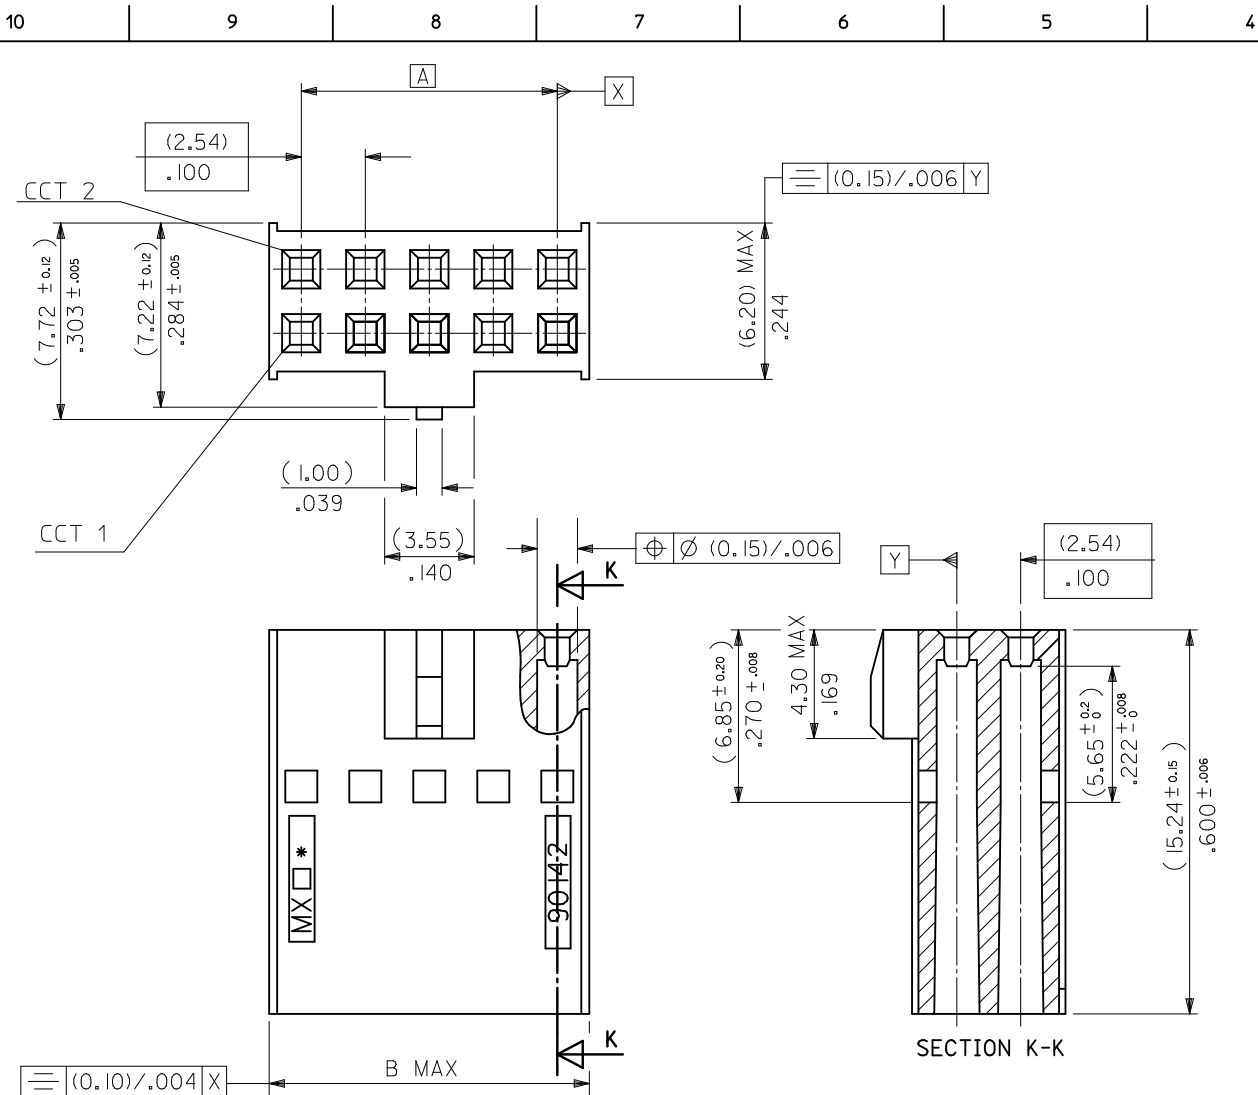

No. OF CKTS	PART NUMBER	DIM A	DIM B
6	90142-XX06	(5.08) / .200	(7.62) / .300
8	-XX08	(7.62) / .300	(10.16) / .400
10	-XX10	(10.16) / .400	(12.70) / .500
12	-XX12	(12.70) / .500	(15.24) / .600
14	-XX14	(15.24) / .600	(17.78) / .700
16	-XX16	(17.78) / .700	(20.32) / .800
18	-XX18	(20.32) / .800	(22.86) / .900
20	-XX20	(22.86) / .900	(25.40) / 1.000
22	-XX22	(25.40) / 1.000	(27.94) / 1.100
24	-XX24	(27.94) / 1.100	(30.48) / 1.200
26	-XX26	(30.48) / 1.200	(33.02) / 1.300
28	-XX28	(33.02) / 1.300	(35.56) / 1.400
30	-XX30	(35.56) / 1.400	(38.10) / 1.500
32	-XX32	(38.10) / 1.500	(40.64) / 1.600
34	-XX34	(40.64) / 1.600	(43.18) / 1.700
36	-XX36	(43.18) / 1.700	(45.72) / 1.800
38	-XX38	(45.72) / 1.800	(48.26) / 1.900
40	-XX40	(48.26) / 1.900	(50.80) / 2.000
42	-XX42	(50.80) / 2.000	(53.34) / 2.100
44	-XX44	(53.34) / 2.100	(55.88) / 2.200
46	-XX46	(55.88) / 2.200	(58.42) / 2.300
48	-XX48	(58.42) / 2.300	(60.96) / 2.400
50	-XX50	(60.96) / 2.400	(63.50) / 2.500
52	-XX52	(63.50) / 2.500	(66.04) / 2.600
54	-XX54	(66.04) / 2.600	(68.58) / 2.700
56	-XX56	(68.58) / 2.700	(71.12) / 2.800
58	-XX58	(71.12) / 2.800	(73.66) / 2.900
60	-XX60	(73.66) / 2.900	(76.20) / 3.000
62	-XX62	(76.20) / 3.000	(78.74) / 3.100
64	-XX64	(78.74) / 3.100	(81.28) / 3.200

SECTION K-K

NOTES:

- MATERIAL CODE - XX
00 = STANDARD OPTION - POLYPHENYLENE OXIDE
UL 94 V1 COLOUR BLACK

10 = GLOW WIRE OPTION - PBT UL 94 V2 COLOUR NATURAL
IEC 60695 @ 750° C
- PART NUMBER OPTIONS
90142 - XX YY
MATERIAL CODE _____ INDICATES No OF CIRCUITS
SEE NOTE 1

ADD IDENT. MARKING EC NO: S2010-0831 DRWN:SKANG 2010/03/31 CHKD:ATSEE 2010/04/22 APPR:MLONG 2010/04/23	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY	DATE	TITLE			
		4 PLACES	± ---	± ---	KS	1987/09/08	C-GRID III DUAL ROW CRIMP CONNECTOR HOUSING				
		3 PLACES	± ---	± ---	CHECKED BY	DATE					
2 PLACES	± 0.35	± .014	APPROVED BY	DATE	MOLEX INCORPORATED						
1 PLACE	± 0.35	± .014	MLONG	2010/04/22							
ANGULAR ± 1/2°				MATERIAL NO.	DOCUMENT NO.	SHEET NO.					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE TABLE		SD-90142		1 OF 1			
				SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
N1				A3							