

PFS

HIGH EFFICIENCY RECTIFIER

HER201 THRU HER208

VOLTAGE RANGE
CURRENT


50 to 1000 Volts
2.0Ampere

FEATURES

- Low coat construction
- Fast switching for high efficiency.
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 secods/.375”(9.5mm)lead length at 5 lbs(2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.014ounce, 0.39 grams

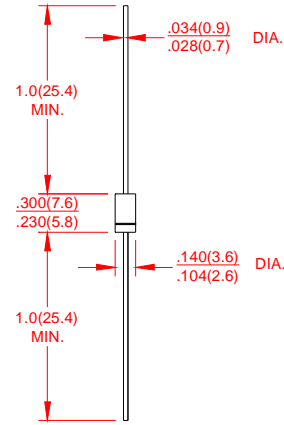

DO-15

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	HER 201	HER 202	HER 203	HER 204	HER 205	HER 206	HER 207	HER 208	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	300	400	600	800	1000	Volts
Maximum RMS Voltage	V _{RMS}	35	70	140	210	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	300	400	600	800	1000	Volts
Maximum Average Forward Rectified Current 0.375”(9.5mm) lead length at T _A = 50°C	I _(AV)	2.0								Amp
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I _{FSM}	60								Amps
Maximum Instantaneous Forward Voltage @ 1.5A	V _F	1.0		1.3		1.5		1.7		Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	I _R	5.0								μA
		250								
Maximum Full Load Recovery Current,full cycle average 0.375”(9.5mm)lead length at TL=55°C	I _{R(AV)}	100								μA
Maximum Reverse Recovery Time(NOTE 1)	t _{rr}	50				75				ns
Typical Thermal Resistance (NOTE 2)	C _J	30				20				PF
Typical Thermal Resistance(NOTE 3)	R _{0JA}	40								°C/W
Operating Junction Temperature Range	T _J , T _{STG}	(-55 to +150)								°C

Notes:

1. Test Condition:IF=0.5A,IR=1.0A,IRR=0.25A
2. Measured at 1 MHz and applied reverse of 4.0 volts.
3. Thermal resistance from junction to ambient with .375”(9.5mm)lead length, P.C.B. mounted.

RATING AND CHARACTERISTIC CURVES HER201 THRU HER208

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

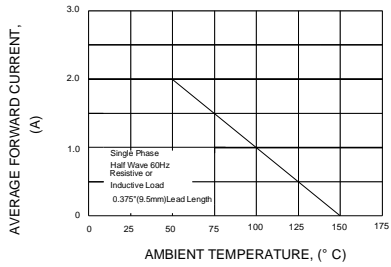


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

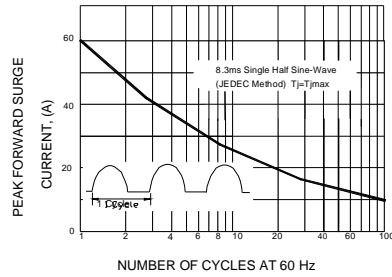


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

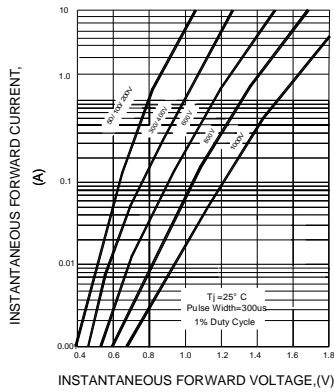


FIG.4-TYPICAL REVERSE CHARACTERISTICS

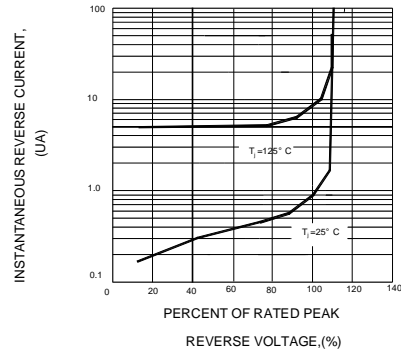


FIG.5-TYPICAL JUNCTION CAPACITANCE


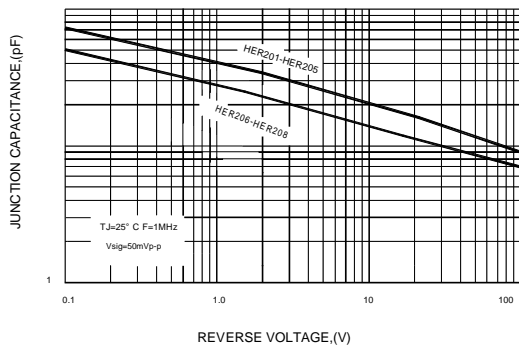


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

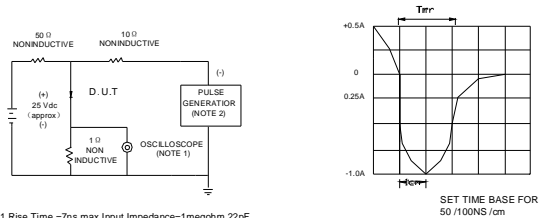

NOTE: 1. Rise time = 7ns max. Input Impedance = 1 megohm. 22pF
2. Rise time = 10ns max. Source Impedance = 50 ohms

SET TIME BASE FOR 50 / 100NS /cm