



Target Specification of 6MB150S-060

1. Output Drawing (Unit : mm)

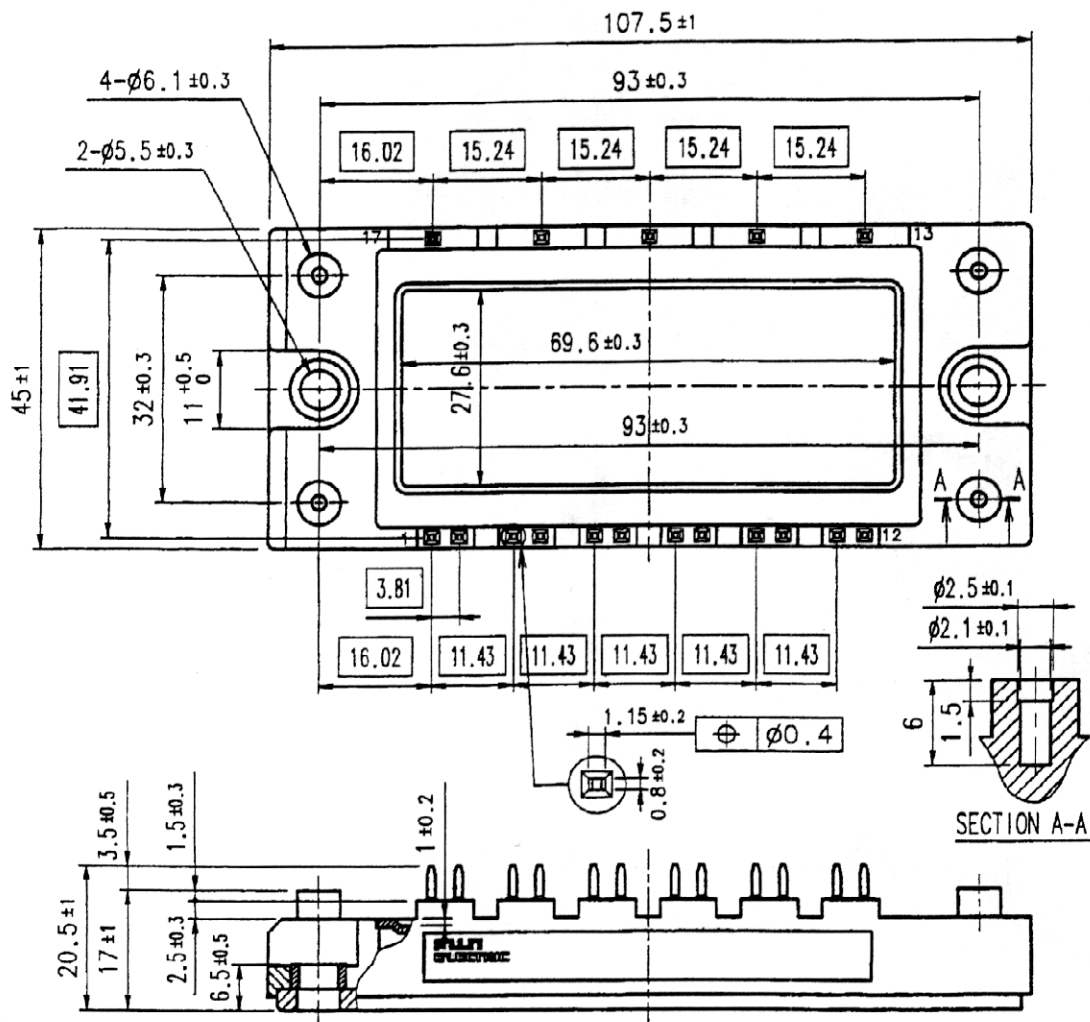

□ shows theoretical dimension.

2. Equivalent circuit

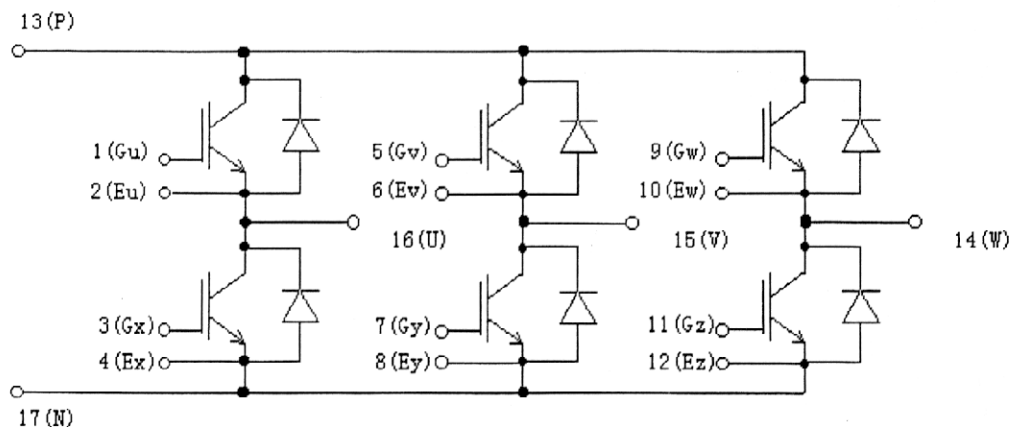

DATE	NAME	APPROVED
DRAWN June 1 - '99	T. Mori	
CHECKED June 4 - '99	S. Hiyama	
REVISIONS		

Fuji Electric Co., Ltd

DWG. NO.

MT5F10058

1/2

3. Absolute Maximum Ratings (at Tc= 25°C unless otherwise specified)

Items	Symbols	Conditions	Maximum Ratings	Units
Collector-Emitter voltage	VCES		600	V
Gate-Emitter voltage	VGES		±20	V
Collector current	Ic	Continuous	50	A
	Ic pulse	1ms	100	
	-Ic		50	
	-Ic pulse	1ms	100	
Collector Power Dissipation	Pc	1 device	200	W
Junction temperature	Tj		150	°C
Storage temperature	Tstg		-40~ +125	°C
Isolation voltage ^(*)	Viso	AC : 1min.	2500	V
Mounting Screw Torque ^(*)			3.5	N · m

(*) All terminals should be connected together when isolation test will be done.

(*) Recommendable Value : 2.5~3.5 N · m (M5)

4. Electrical characteristics (at Tj= 25°C unless otherwise specified)

Items	Symbols	Conditions	Characteristics			Units
			min.	typ.	Max.	
Zero gate voltage Collector current	ICES	VGE = 0 V, VCE = 600 V			1.0	mA
Gate-Emitter leakage current	IGES	VCE = 0 V, VGE = ±20 V			200	nA
Gate-Emitter threshold voltage	VGE(th)	VCE = 20 V, Ic = 50 mA		7.8		V
Collector-Emitter saturation voltage	VCE(sat)	VGE = 15 V, Tj = 25 °C		1.95		V
		Ic = 50 A, Tj = 125 °C		2.10		
Input capacitance	Cies	VGE = 0 V		5000		pF
Output capacitance	Coes	VCE = 10 V		900		
Reverse transfer capacitance	Cres	f = 1 MHz		600		
Turn-on time	ton	Vcc = 300 V		0.45		μs
	tr	Ic = 50 A		0.25		
	tr(i)	VGE = ±15 V		0.08		
Turn-off time	toff	RG = 51 Ω		0.40		
	tf			0.05		
Forward on voltage	VF	IF = 50 A, Tj = 25 °C		1.9		V
		Tj = 125 °C		1.8		
Reverse recovery time	trr	IF = 50 A				ns

5. Thermal resistance characteristics

Items	Symbols	Conditions	Characteristics			Units
			min.	typ.	Max.	
Thermal resistance (1 device)	Rth(j-c)	IGBT			0.63	°C/W
		FWD			1.33	
Contact Thermal resistance	Rth(c-f)	with Thermal Compound (※)		0.05		

※ This is the value which is defined mounting on the additional cooling fin with thermal compound.

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party, nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

REVISIONS			
CHECKED			
DRAWN			

DATE	NAME	APPROVED	Fuji Electric Co., Ltd.
DWG. NO. MT5F10058 2/2			