

# Low Noise Amplifier


## 6 GHz - 18 GHz

This Low Noise Amplifier offers low Noise figure performance of 3.8 dB over the band 6 GHz to 18 GHz with 36 dB Gain.

Teledyne Microwave amplifiers are balanced or feedback designs and manufactured with the latest MIC & MMIC technology. The GaAs FET's used in these amplifiers are well established proven devices from multiple sources.

Teledyne Microwave offers a complete line of Narrow and broadband Amplifiers covering the frequency range 500 MHz to 40 GHz. These products are available in either connectorized packages or as modules. For a complete list of these products and more, please visit our website.

Other products from Teledyne Microwave include: Transceivers, Synthesizers, and YIG Products

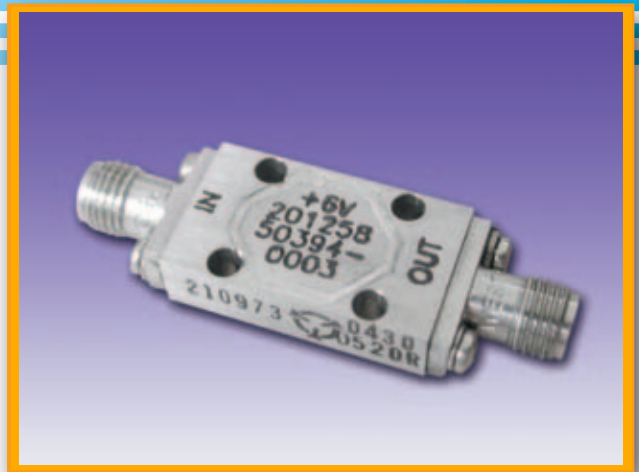

---

### Specifications:

Model Number: TLA-18-6007

Frequency Range: 6 GHz - 18 GHz

Gain (min): 36 dB

Gain Vs Temp at any Frequency: This Amplifier is not Temperature Compensated

Noise Figure (max): 3.8 dB

Output Power @ 1dB Compression: 18 dBm

Gain Flatness Vs Frequency: +/-2.0 dB

3<sup>rd</sup> Order Intercept (Typ): 23 dBm

Power Supply:

Input Voltage: 11.5 to 15 VDC

Current @ 12 VDC (typ): 490 mA

Current @ 12 VDC (max): 560 mA

Case Type (See attached Outline): SX8

Temperature Range: +25




**TELEDYNE  
MICROWAVE**

ISO 9001:2000

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845  
www.teledynemicrowave.com • microwave@teledyne.com

# Low Noise Amplifier

## 6 GHz - 18 GHz

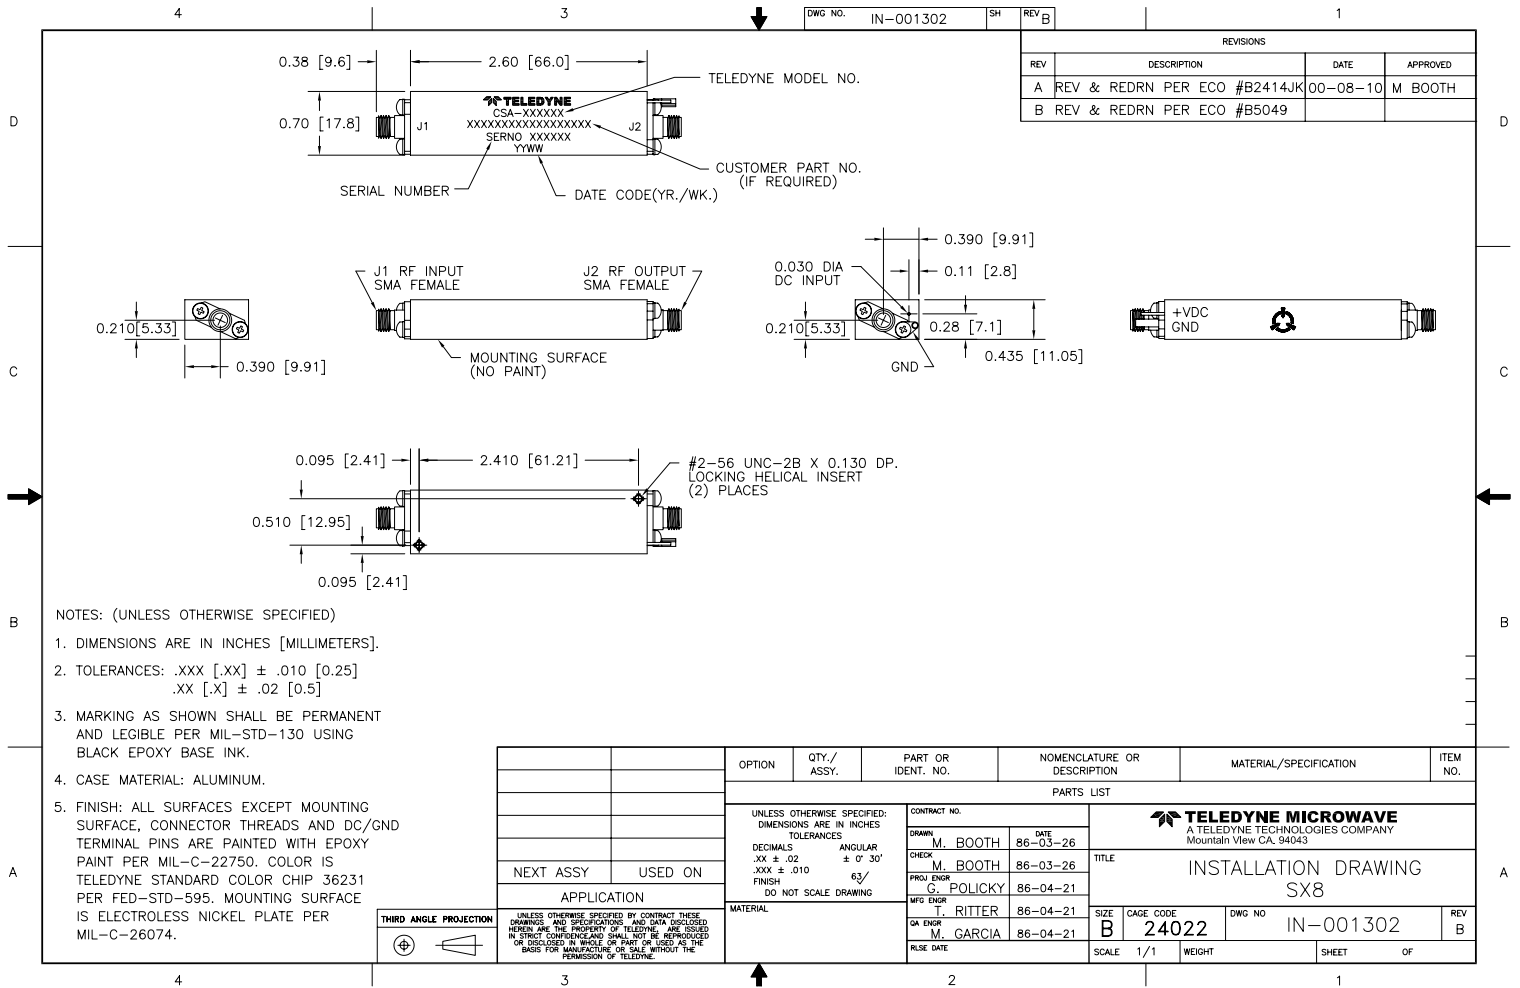

ISO 9001:2000

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845  
www.teledynemicrowave.com • microwave@teledyne.com