

QLUM2216-PT280C Device Data Sheet



..... Utopia Level 2 Master/Master Bridge Datasheet

1.0 Utopia Level 2 (L2) Bridge Features

- Compliant with ATM-Forum af-phy-0039.000, June 1995 specification
- Implements two Utopia L2 Masters providing a solution to bridge Utopia Slave devices
- Single chip solution for improved system integration
- Supports cell level transfer mode
- Meets 50MHz performance offering up to 800Mbps cell rate transfers
- Cell and clock rate decoupling with on chip FIFOs
- Up to 1.5 KByte of on chip FIFO per data direction
- Integrated management interface and built-in errored cell discard
- ATM Cell size programmable via external pins from 16 to 128 bytes
- Optional Utopia parity generation/checking enable/disable via external pin
- Built in JTAG port (IEEE1149 compliant)
- Simulation model available for system level verification (Contact Quicklogic for details)
- Solution also available as flexible Soft-IP core, delivered with a full device modelization and verification testbenches



2.0 Utopia Overview

The Utopia (Universal Test & Operations PHY Interface for ATM) interface is defined by the ATM Forum to provide a standard interface between ATM devices and ATM PHY or SAR (segmentation and Re-assembly) devices.

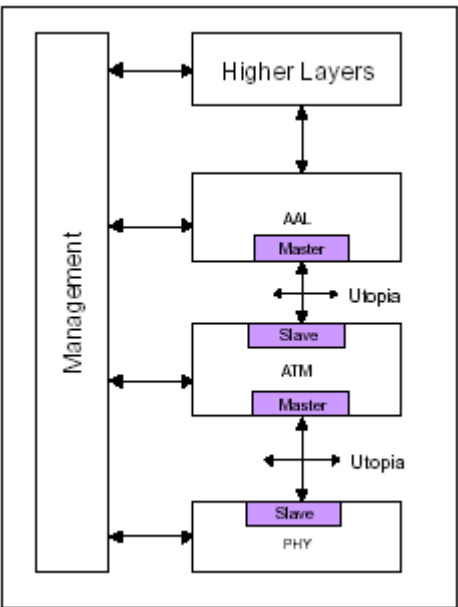


Figure 1: Utopia Reference Model

The Utopia Standard defines a full duplex bus interface with a Master/Slave paradigm. The Slave interface responds to the requests from the Master. The Master performs PHY arbitration and initiates data transfers to and from the Slave device.

The ATM forum has standardized the Utopia Levels 1 (L1) to 3 (L3). Each level extends the maximum supported interface speed from OC3, 155Mbps (L1) over OC12, 622Mbps (L2) to 3.2Gbit/s (L3).

The following Table 1 gives an overview of the main differences in these three levels.

Table 1: Utopia Level Differences

Utopia Level	Interface Width	Max. Interface Speed	Maximum Throughput
1	8-bit	25 MHz	200 Mbps (typ. OC3 155 Mbps)
2	8-bit, 16-bit	50 MHz	800 Mbps (typ. OC12 622 Mbps)
3	8-bit, 32-bit	104 MHz	3.2 Gbps (typ. OC48 2.5 Gbps)

Utopia Level 1 implements an 8-bit interface running at up to 25MHz. Level 2 adds a 16 Bit interface and increases the speed to 50MHz. Level 3 extends the interface further by a 32 Bit word-size and speeds up to 104MHz providing rates up to 3.2 Gbit/s over the interface.

In addition to the differences in throughput, Utopia Level 2 uses a shared bus offering to physically share a single interface bus between one master and up to 31 slave devices (Multi-PHY or MPHY operation). This allows the implementation of aggregation units that multiplex several slave devices to a single Master device. The Level 2 and Level 3 are point-to-point only, whereas Level 1 has no notion of multiple slaves. Level 3 still has the notion of multiple slaves, but they must be implemented in a single physical device connected to the Utopia Interface.

3.0 Utopia Master/Master Bridge Application

As it is not possible to connect two Slave devices together, the Master/Master Bridge provides the necessary interfaces to convey between two Slave devices as shown in Figure 2.

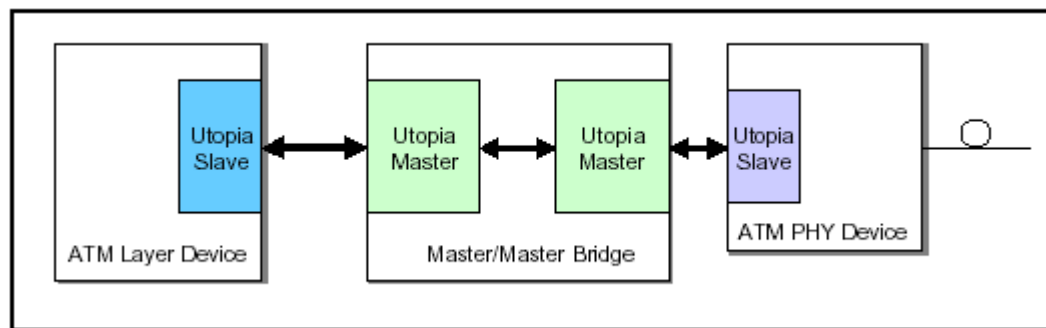


Figure 2: Utopia Master Bridge

The Bridge automatically transfers data as soon as it becomes available from one side to the other. Internal asynchronous FIFOs enable independent clock domains for each interface.

4.0 Application

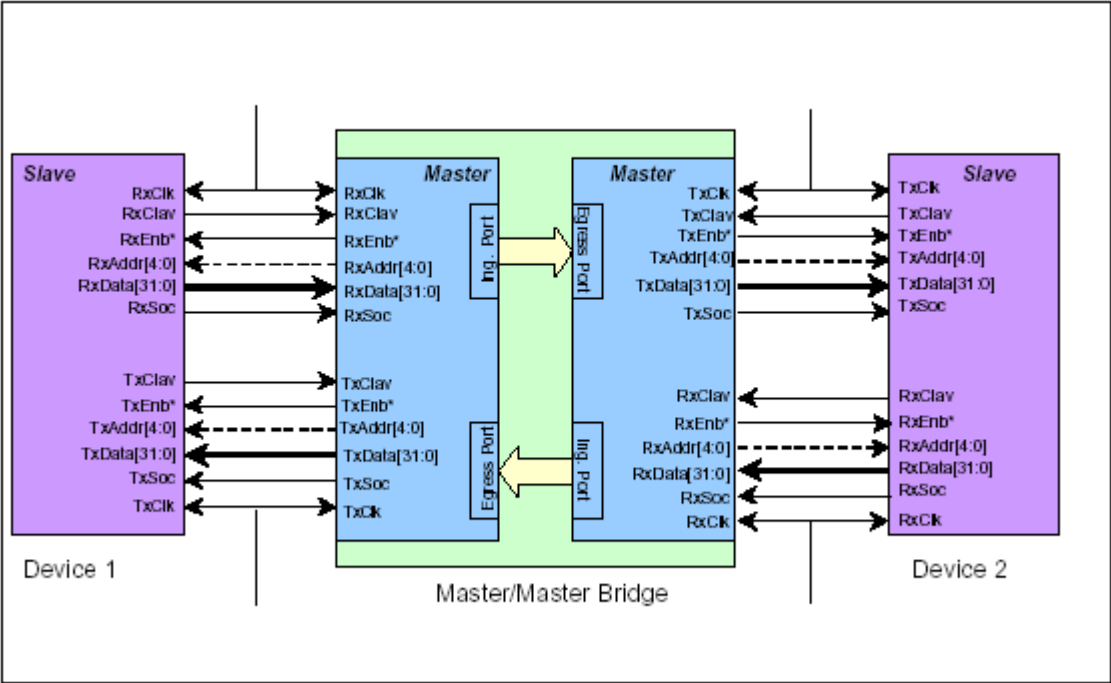


Figure 3: Master/Master Bridge connecting two Slave Devices

5.0 Bridge Core Pinout

Bridge Core implements all the required Utopia signals and provides all the Utopia optional signals (Indicated by an 'O' in the following tables).

In addition to the Utopia Interface signals, error indication signals are available for error monitoring or statistics. An error indication always shows that a cell has been discarded by the bridge. Possible errors are parity or cell-length errors on the receive interface of the corresponding Utopia Interfaces.

All Utopia interfaces work in the same transfer mode (cell level).

To identify the sides of the bridge, the notion "WEST" and "EAST" for the corresponding interfaces will be used.

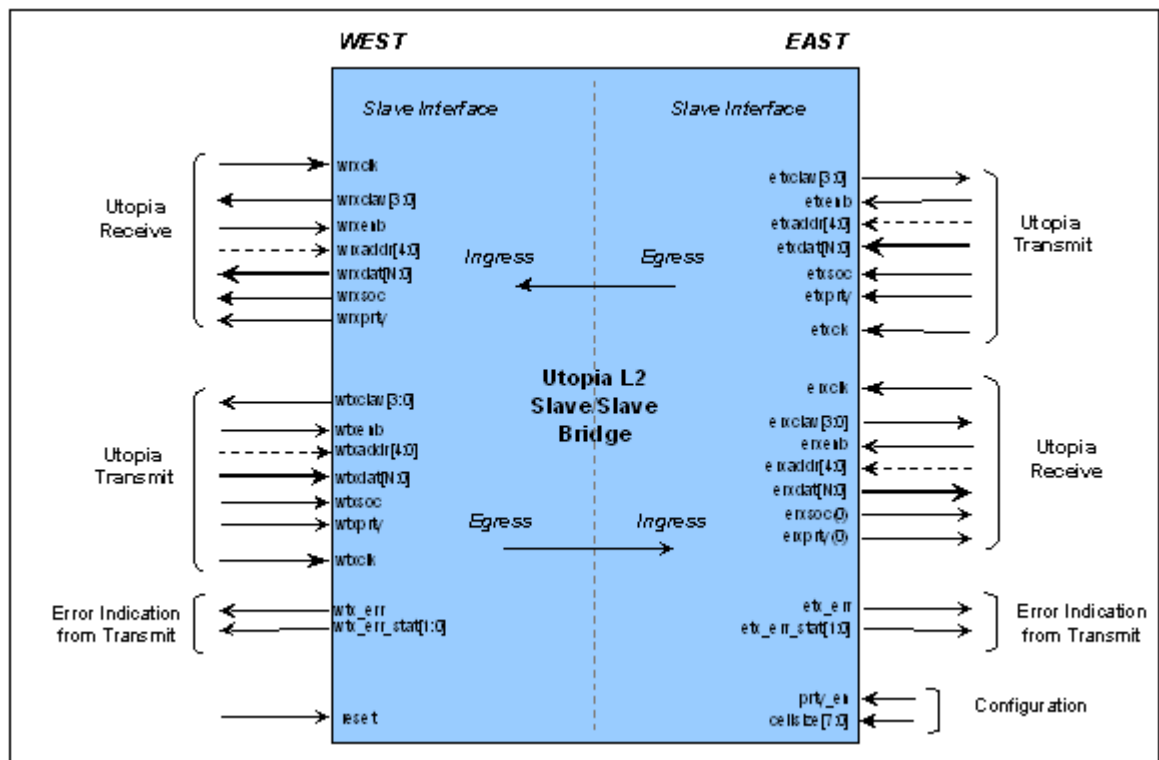


Figure 4: Utopia Level 2 Master/Master Bridge Top Entity

5.1 Signal Descriptions

Table 2: Global Signal

Pin	Mode	Description
reset	In	Active high chip reset

Table 3: Device Management Interface

Pin	Mode	Description
wrx_err	Out	Receive error indication on west receive interface. When driven high, indicates that an errored cell (Wrong parity or wrong length) was received from the device connected to the west interface and is discarded.
wrx_err_stat(1:0)	Out	Receive error status information for west receive interface. When wrx_err is driven, indicates the error status of the discarded cell: <ul style="list-style-type: none"> wrx_err_stat(0) : When set to '1' indicates that a cell is discarded because of a parity error. wrx_err_stat(1) : When set to '1' indicates that a cell is discarded because it has a wrong length (Consecutive assertion of ut_tx_soc on the Utopia interface within less than a complete cell time).
erx_err(n)	Out	Receive error indication on east receive interface(s). When driven high, indicates that an errored cell (Wrong parity or wrong length) was received from the device connected to the east interface side.
erx_err_stat(n) (1:0)	Out	Receive error status information for east receive interface. When erx_err is driven, indicates the error status of the discarded cell: <ul style="list-style-type: none"> erx_err_stat(0) : When set to '1' indicates that a cell is discarded because of a parity error. erx_err_stat(1) : When set to '1' indicates that a cell is discarded because it has a wrong length (Consecutive assertion of ut_tx_soc on the Utopia interface within less than a complete cell time).

Table 4: West Utopia Master Transmit Interface

Pin	Mode	Description
wtxclk	In	50MHz transmit byte clock. The Core samples all Utopia Transmit signals on txclk rising edge.
wtxdata[15:0]	Out	Transmit data bus.
wtxprty	Out	Transmit data bus parity. Standard odd or non-standard even parity can be optionally checked by the connected Slave.
		When the parity check is disabled during the Core configuration, or not used in the design, the pin txprty should be left open.
wtxsoc	Out	Transmit start of cell. Asserted by the Master to indicate that the current word is the first word of a cell.
wtxenb	Out	Active low transmit data transfer enable.
wtxclav[0]	In	Cell buffer available. Asserted in octet level transfers to indicate to the Master that the FIFO is almost full (Active low) or, in cell level transfers, to indicate to the Master that the PHY port FIFO has space to accept one cell.
wtxclav[3:1] (0)	In	Extra FIFO Full / Cell buffer available. In MPHY mode and when direct status indication is selected during the Core configuration, one txclav signal is implemented per PHY port. The maximum number of clav signals is limited to four.
wtxaddr[4:0]	Out	Utopia transmit address. When the Core operates in MPHY mode, address bus used during polling and slave port selection. Bit 4 is the MSB. txaddr(4:0) becomes optional (And should be left open) when the Core does not operate in MPHY mode.

NOTE: (0) indicates optional signals.

Table 5: West Utopia Master Receive Interface

Pin	Mode	Description
wrxclk	In	50MHz receive byte clock. The Core samples all Utopia Receive signals on rxclk rising edge.
wrxdata[15:0]	In	Receive data bus.
wrxprty(0)	In	Receive data bus parity. Standard odd or non standard even parity can be optionally generated by the Utopia Slave Core. When the parity generation is disabled during the Core configuration, the pin rxprty can be let unconnected.
wrxsoc	In	Receive start of cell. Asserted to indicate that the current word is the first word of a cell.
wrxenb	Out	Active low transmit data transfer enable.
wrxclav[0]	In	Cell buffer available. Asserted in octet level transfers to indicate to the Master that the FIFO is almost empty (Active low) or, in cell level transfers, to indicate to the Master that the PHY port FIFO has space one cell available in the FIFO.
wrxclav[3:1] (0)	In	Extra FIFO Full / Cell buffer available. In MPHY mode and when direct status indication is selected, one rxclav signal is implemented per PHY port. The maximum number of clav signals is limited to four.
wrxaddn(4:0)	Out	Utopia receive address. When the Core operates in MPHY mode, address bus used during polling and slave port selection. Bit 4 is the MSB. txaddr(4:0) becomes optional (And should be left open) when the Core does not operate in MPHY mode.

Table 6: East Utopia Master Transmit Interface

Pin	Mode	Description
etxclk	In	50MHz transmit byte clock. The Core samples all Utopia Transmit signals on txclk rising edge.
etxdata[15:0]	Out	Transmit data bus.
etxppty	Out	Transmit data bus parity. Standard odd or non-standard even parity can be optionally checked by the connected Slave. When the parity check is disabled during the Core configuration, or not used in the design, the pin txppty should be left open.
etxsoc	Out	Transmit start of cell. Asserted by the Master to indicate that the current word is the first word of a cell.
etxenb	Out	Active low transmit data transfer enable.
etxclav[0]	In	Cell buffer available. Asserted in octet level transfers to indicate to the Master that the FIFO is almost full (Active low) or, in cell level transfers, to indicate to the Master that the PHY port FIFO has space to accept one cell.
etxclav[3:1] (0)	In	Extra FIFO Full / Cell buffer available. In MPHY mode and when direct status indication is selected during the Core configuration, one txclav signal is implemented per PHY port. The maximum number of clav signals is limited to four.
etxaddr[4:0]	Out	Utopia transmit address. When the Core operates in MPHY mode, address bus used during polling and slave port selection. Bit 4 is the MSB. txaddr(4:0) becomes optional (And should be left open) when the Core does not operate in MPHY mode.

Table 7: East Utopia Master Receive Interface

Pin	Mode	Description
erxclk	In	50MHz receive byte clock. The Core samples all Utopia Receive signals on rxclk rising edge.
erxdata[15:0]	In	Receive data bus.
erxppty (0)	In	Receive data bus parity. Standard odd or non standard even parity can be optionally generated by the Utopia Slave Core. When the parity generation is disabled during the Core configuration, the pin rxppty can be let unconnected.
erxsoc	In	Receive start of cell. Asserted to indicate that the current word is the first word of a cell.
erxenb	Out	Active low transmit data transfer enable.
erxclav[0]	In	Cell buffer available. Asserted in octet level transfers to indicate to the Master that the FIFO is almost empty (Active low) or, in cell level transfers, to indicate to the Master that the PHY port FIFO has space one cell available in the FIFO.
rxclav[3:1] (0)	In	Extra FIFO Full / Cell buffer available. In MPHY mode and when direct status indication is selected, one rxclav signal is implemented per PHY port. The maximum number of clav signals is limited to four.
erxaddr(4:0)	Out	Utopia receive address. When the Core operates in MPHY mode, address bus used during polling and slave port selection. Bit 4 is the MSB. taddr(4:0) becomes optional (And should be left open) when the Core does not operate in MPHY mode.

Table 8: Device Configuration Pins

Pin	Mode	Description
prty_en	In	Enable parity checking on the Utopia interface. If disabled (tied to 0), the wrx_err_stat(0) signal can be ignored and left open and the rx parity input should be tied to 0. Also the tx parity pins can be left open.
cellsize[7:0]	In	Define cellsize: sets the size in bytes of a cell. Binary value to be set usually by board wiring. For 16 bit implementations the size must be a multiple of 2.

The configuration pins are not intended for change during operation. They are usually board wired to configure the device for operation.

6.0 Global Signal Distribution

The externally provided Utopia Transmit and Receive clocks are connected to global resources to provide low skew and fast chip level distribution. In both data directions, the two corresponding Utopia Interfaces are decoupled by asynchronous FIFOs.

Therefore each interface runs completely independently each at its own tx and rx clocks which typically are 50 MHz.

The Error indications of the two receive interfaces are always sampled within the west clock domains. The errors of the east rx interface is available on the `erx_err` signal, which is handled using the west clock domain (`wtxclk`). The west rx error is directly derived from the west rx block (`wrxclk`).

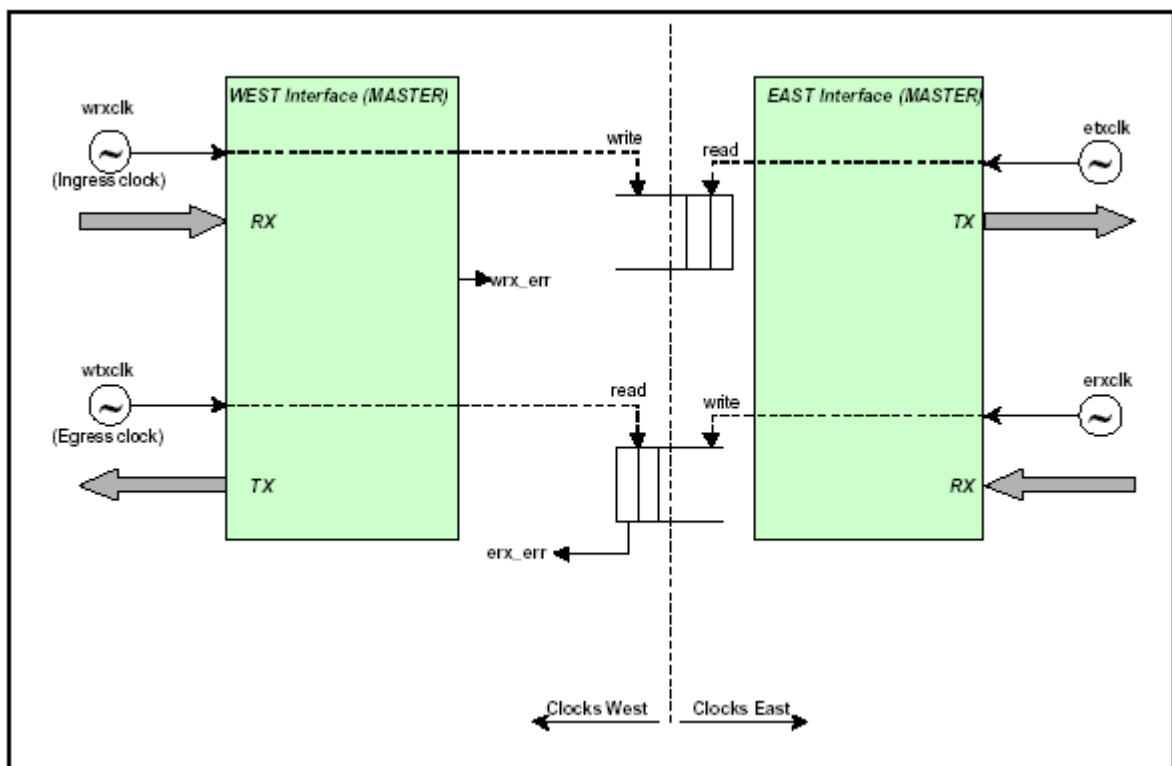


Figure 5: Master/Master Bridge Clock Distribution

7.0 Functional Description - Utopia Interface

The Utopia Bridge operates in single PHY mode. Therefore no address bus and only a single status pin (clav[0]) per direction is used on the interfaces.

7.1 Utopia Interface Single PHY Transmit Interface

The Transmit interface is controlled by the Master (usually ATM layer).

The transmit interface has data flowing in the same direction as the Master's enable `ut_txenb`. The Master transmit block generates all output signals on the rising edge of the `ut_txclk`.

Transmit data is transferred from the Master to Slave via the following procedure. The Slave indicates it can accept data using the `ut_txclav` (Mapped to `ut_txfull` in Octet level transfer mode) signal, then the Master drives data onto `ut_txdat` and asserts `ut_txenb`. The Slave controls the flow of data via the `ut_txclav` signal.

7.1.1 Cell Level Transfer - Single Cell

The Slave asserts `ut_txclav` **1** when it is capable of accepting the transfer of a whole cell. The Master asserts `ut_txenb` (Low) to indicate that it drives valid data to the Slave **2**. Together with the first word of a cell, the Master asserts `ut_txsoc` for one clock cycle **3**.

To ensure that the Master does not cause transmit overrun, the Slave must de-assert `ut_txclav` at least 4 cycles before the end of a cell if it cannot accept the immediate transfer of the subsequent cell **4**.

The Master can pause the cell transfer by de-asserting `ut_txenb` **5**. To complete the transfer to the Slave, the Master de-asserts `ut_txenb` **6**.

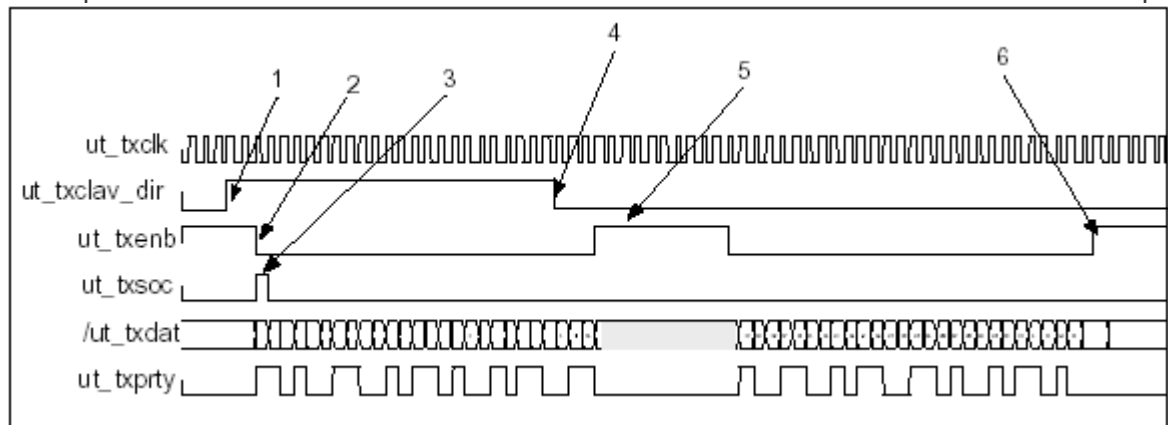


Figure 6: Single Cell Transfer - Cell Level Transfer

7.1.2 Cell Level Transfer - Back to Back Cells

When, during a cell transfer, the Slave is able to receive a subsequent cell, the Master can keep `ut_txenb` asserted between two cells **1** and asserts `ut_txsoc`, to start a new cell transfer, immediately after the last word of the previous cell **2**.

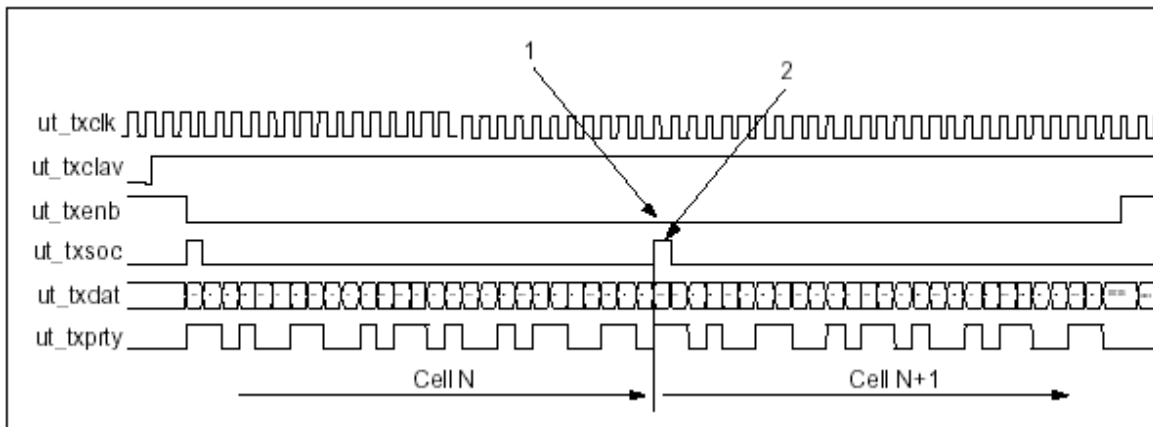


Figure 7: Back to Back Cell Transfer - Cell Level Transfer

7.1.3 Octet Level Transfer - Single Cell

During a time period termed the transmit window, the Slave stores data from `ut_txdata`, if `ut_txenb` is asserted **1**. The transmit window exists from the time that the Slave indicates it can accept data by de-asserting the active low `ut_txfull` (Mapped to Master signal `ut_txclav`), until four valid write cycles after the Slave layer asserts `ut_txfull` **2**.

The Slave asserts the active low `ut_txfull` when it cannot accept data. The Master stops sending data (`ut_txenb` de-asserted) three clock cycles after `ut_txfull` is asserted by the Slave **3**.

When the Slave is able to receive new data, it de-asserts `ut_txfull` **4**. The Master resumes the transfers and re-asserts `ut_txenb` **5**.

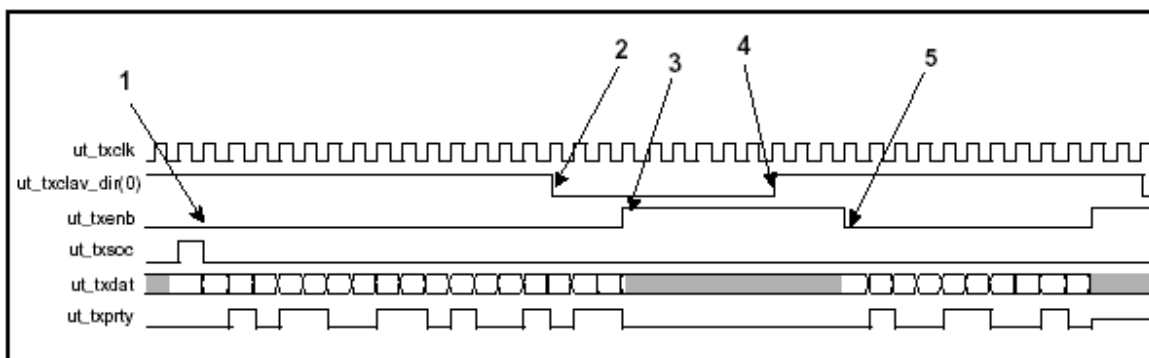


Figure 8: Cell Transfer - Octet Level Transfer

7.2 Utopia Interface Single PHY Receive Interface

The Receive interface is controlled by the Master interface. The receive interface has data flowing in the opposite direction to the Master's enable `ut_rxenb`.

Receive data is transferred from the Slave to Master via the following procedure. The Slave indicates it has valid data, then the Master asserts `ut_rxenb` to read this data from the Slave. The Slave indicates valid data (thereby controlling the data flow) via the `ut_rxclav` signal.

7.2.1 Cell Level Transfer - Single Cell

The Slave asserts `ut_rxclav` when it is ready to send a complete cell to the Master device **1**. The Master asserts `ut_rxenb` to start the cell transfer. The Slave samples `ut_rxenb` and start driving data **2**. The Slave asserts `ut_rxsoc` together with the cell first word to indicate the start of a cell **3**.

The Master can pause a transfer by de-asserting `ut_rxenb` **4**. The Slave samples high `ut_rxenb` and stops driving data **5**. To resume the transfer, the Master re-asserts `ut_rxenb` **6**. The Slave samples low `ut_rxenb` and starts driving valid data **7**.

The Master drives `ut_txenb` high one before the expected end of the current cell if the Slave has no more cell to transfer **8**. The Slave de-asserts `ut_rxclav` to indicate that no new cell is available **9**.

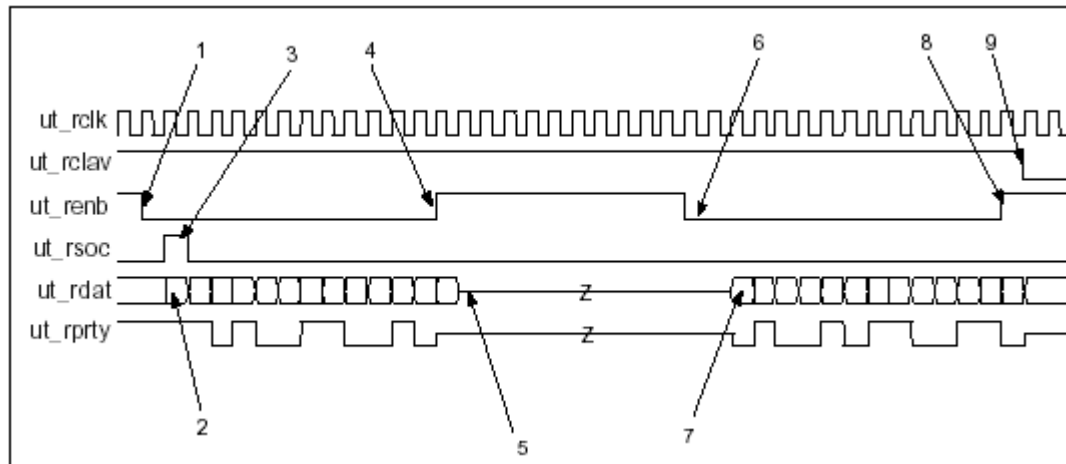


Figure 9: Single Cell Transfer - Cell Level Transfer

7.2.2 Cell Level Transfer - Back to Back Cells

The Master keeps `ut_rxenb` asserted at the end of a cell transfer **1** if the Slave has a new cell to send, the Slave should then keep `ut_rxclav` asserted **2** and immediately drives the new cell asserting `ut_rxsoc` to indicate the start of a new cell **3**.

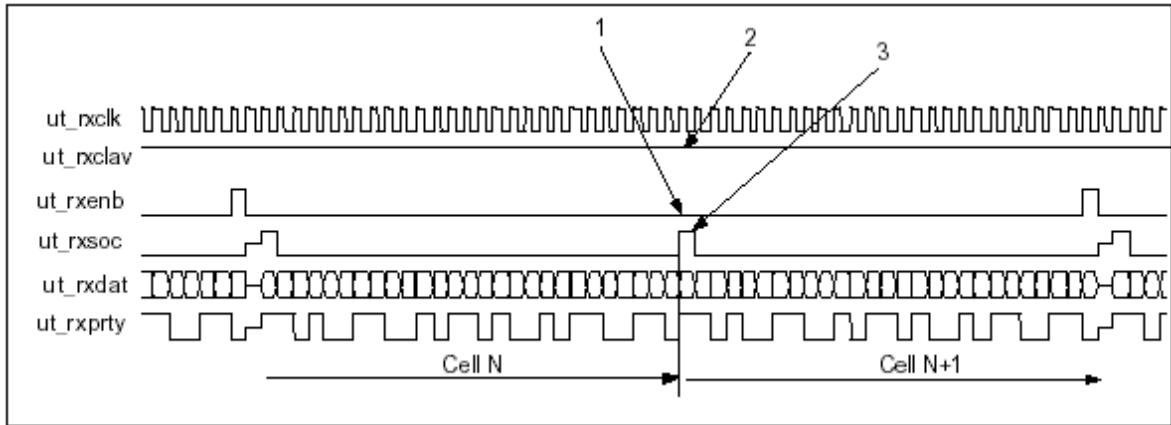


Figure 10: Back to Back Cells Transfer - Cell Level Transfer

8.0 Core Management and Error Handling

On Ingress, the Utopia Master Blocks are designed to handle and report Utopia errors such as Parity error or wrong cell length. Errored cells are discarded with an error status provided on pins for use by external management facilities.

The error handling only applies to the corresponding receive parts of the core (i.e. Ingress Ports).

When an errored cell is received on the Utopia interface, the Core discards the complete cell and provides a cell discard indication (Signal `eg_err` asserted) **1** together with a cell discard status (Signal `eg_err_stat(n)(m:0)`) **2**.

NOTE: Note: `eg_err` is routed to the corresponding `wrx_err` and `erx_err` respectively (see Figure 4).

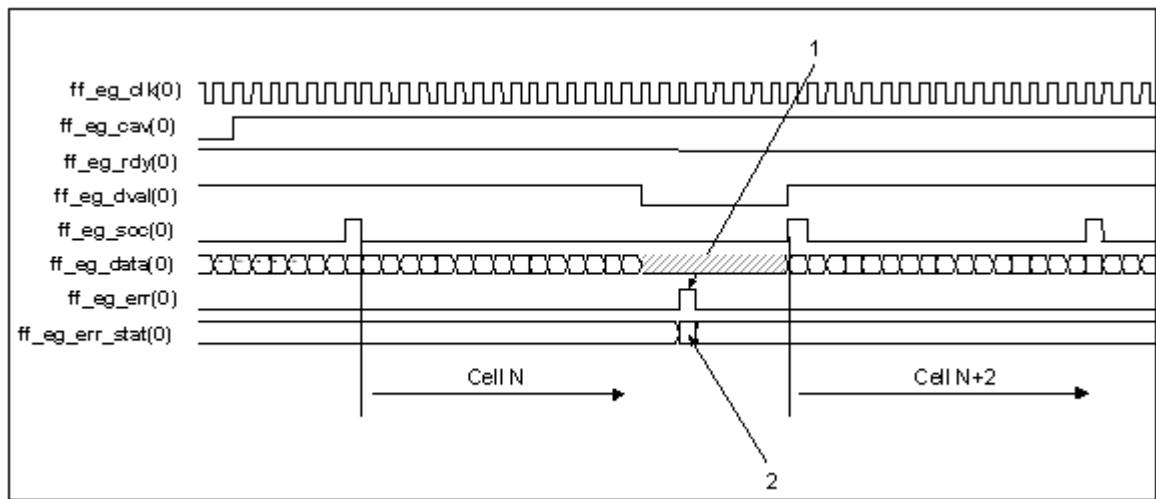


Figure 11: Cell Discard Indication

Table 9: Error Status Word Bit Coding

Error Status Bit	Name	Description
0	PARITY_ERR	Valid when <code>wrx/erx_err</code> is asserted. If set to one indicates that a cell is discarded with a parity error decoded by the Core.
1	LENGTH_ER	Valid when <code>wrx/erx_err</code> is asserted. If set to one indicates that a cell is discarded with a cell length error detected on the Utopia interface.

The signals are sampled on the corresponding clocks from the west interface:

- `erx_...` sampled with `wtxclk` (west transmit clock)
- `wrx_...` sampled with `wrxclk` (west receive clock)

9.0 Complexity and Performance Summary

9.1 Timing Parameters Definition

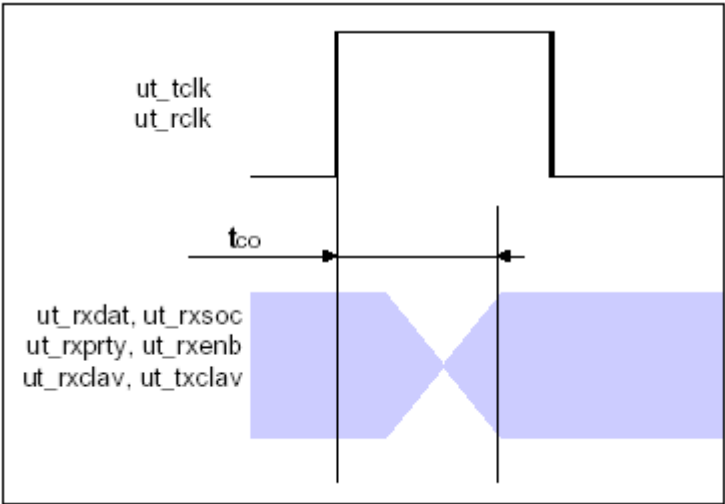


Figure 12: t_{co} Timing Parameter Definition

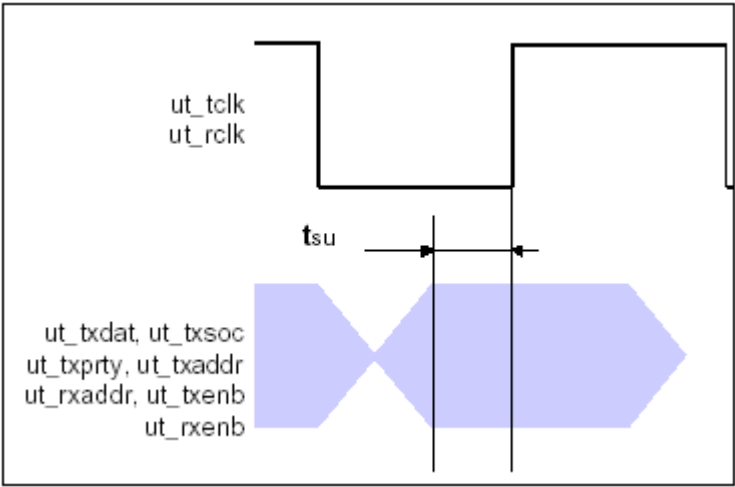


Figure 13: t_{su} Timing Parameter Definition

Table 10: 16-Bit Utopia Interface Timing Characteristics

Parameter	typ	Max	Unit
tco	7.5	7.1	ns
tsu	2.5	2.1	ns
wrxclk		50	MHz
wtxclk		50	MHz
erxclk		50	MHz
etxclk		50	MHz
minimum reset time	50		ns

NOTE: timing model "worst" case is used.

10.0 Device Pinout

10.1 Signals Overview

Table 11: Signals Overview Table

Signals	Description
wrxclk, wrxclav, wrxenb*, wrxdat, wrxsoc	West Utopia Receive Interface.
wtxclk, wtxclav, wtxenb*, wtxdata, wtxsoc	West Utopia Transmit Interface.
wrx_err, wrx_err_stat	West Interface error indication (sampled with wrxclk).
erxclk, erxclav, erxenb*, erxdata, erxsoc	East Utopia Receive Interface.
etxclk, etxclav, etxenb*, etxdata, etxsoc	East Utopia Transmit Interface.
erx_err, erx_err_stat	East Interface error indication (sampled with wtxclk).
prty_en, cellsize	Configuration Pins to be board wired. Cellsize [0] should be tied to GND.
reset	Active high device reset
GND	Ground
VCC	Device Power 2.5 V
clk(x)	unused clock inputs should be tied to GND
IOCTRL(x)	
VCCIO(x)	IO Power 3.3 V
INREF(x)	connect to GND
PLLST(x)	connect to GND or VCC
PLLOUT(x)	connect to GND or VCC
VCCPLL(x)	
GNDPLL(x)	
TCK, TRSTB	JTAG signals. connect to GND
TMS, TDI	JTAG signals. connect to VCC
TDO	JTAG signal. leave open
iov	
nc	not connected. should be left open

*: active low signal

NOTE: Unused Pins (data busses) in the following tables are to be handled like "nc".

10.2 PT280 FPBGA Device Diagram

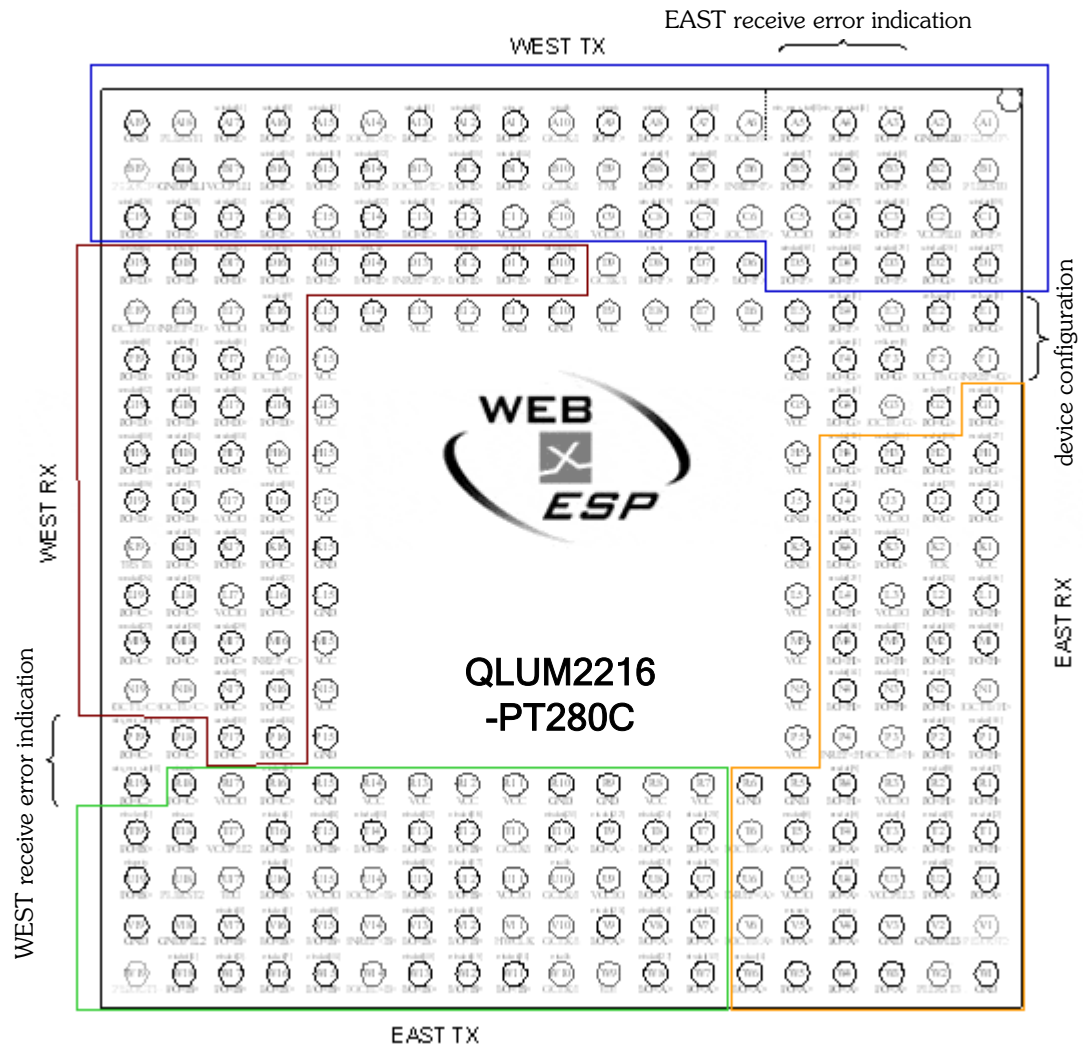


Figure 14: PT280 bottom view (0.8mm FPBGA)

10.3 208 Pin PQFP (PQ208) Pinout Table

Table 12: 208 Pin PQFP (PQ208) Pinout Table

PIN	Function	PIN	Function	PIN	Function	PIN	Function	PIN	Function
A1	pllout(3)	D1	N/C	G19	wrxdat[12]	N16	N/C	U6	inref(a)
A2	gndpll(0)	D2	N/C	H1	N/C	N17	N/C	U6	N/C
A3	erx_err	D3	N/C	H2	N/C	N18	ioctrl(c)	U8	N/C
A4	erx_err_stat[0]	D4	N/C	H3	N/C	N19	ioctrl(c)	U9	vccio(a)
A5	erx_err_stat[1]	D5	N/C	H4	N/C	P1	erxdat[10]	U10	erxclk
A6	ioctrl(f)	D6	nc (cellsize[0])	H5	vcc	P2	erxdat[11]	U11	vccio(b)
A7	wtxclav[0]	D7	prty_en	H15	vcc	P3	ioctrl(h)	U12	N/C
A8	wtxprty	D8	reset	H16	vcc	P4	inref(h)	U13	etxdat[13]
A9	wtxenb	D9	clk(8)	H17	wrxdat[13]	P5	vcc	U14	ioctrl(b)
A10	wtxclk	D10	wrxclav[0]	H18	wrxdat[14]	P15	gnd	U15	vccio(b)
A11	wtxsoc	D11	wrxprty	H19	wrxdat[15]	P16	N/C	U16	etxdat[5]
A12	wtxdat[0]	D12	wrxenb	J1	N/C	P17	N/C	U17	tdo
A13	wtxdat[1]	D13	inref(e)	J2	N/C	P18	wrx_err	U18	pllrst(2)
A14	ioctrl(e)	D14	wrxsoc	J3	vccio(g)	P19	wrx_err_stat[0]	U19	etxprty
A15	wtxdat[2]	D15	wrxdat[0]	J4	N/C	R1	erxdat[7]	V1	pllout(2)
A16	wtxdat[3]	D16	wrxdat[1]	J5	gnd	R2	erxdat[8]	V2	gndpll(3)
A17	wtxdat[4]	D17	wrxdat[2]	J15	vcc	R3	vccio(h)	V3	gnd
A18	pllrst(1)	D18	wrxdat[3]	J16	N/C	R4	erxdat[9]	V4	erxprty
A19	gnd	D19	wrxdat[4]	J17	vccio(d)	R5	gnd	V5	erxenb
B1	pllrst(0)	E1	cellsize[3]	J18	N/C	R6	gnd	V6	ioctrl(a)
B2	gnd	E2	cellsize[2]	J19	N/C	R7	vcc	V7	N/C
B3	wtxdat[5]	E3	vccio(g)	K1	vcc	R8	vcc	V8	N/C
B4	wtxdat[6]	E4	cellsize[1]	K2	tck	R9	gnd	V9	N/C
B5	wtxdat[7]	E5	gnd	K3	N/C	R10	gnd	V10	clk(1)
B6	inref(f)	E6	vcc	K4	N/C	R11	vcc	V11	clk(4)
B7	wtxdat[8]	E7	vcc	K5	gnd	R12	vcc	V12	N/C
B8	wtxdat[9]	E8	vcc	K15	gnd	R13	vcc	V13	etxdat[14]
B9	tms	E9	vcc	K16	N/C	R14	vcc	V14	inref(b)
B10	clk(6)	E10	gnd	K17	N/C	R15	gnd	V15	etxdat[9]
B11	wtxdat[10]	E11	gnd	K18	N/C	R16	etxdat[3]	V16	etxdat[6]
B12	wtxdat[11]	E12	vcc	K19	trstb	R17	vccio(c)	V17	etxdat[1]
B13	ioctrl(e)	E13	vcc	L1	N/C	R18	etxenb	V18	gndpll(2)
B14	wtxdat[12]	E14	gnd	L2	N/C	R19	wrx_err_stat[1]	V19	gnd
B15	wtxdat[13]	E15	gnd	L3	vccio(h)	T1	erxdat[2]	W1	gnd
B16	wtxdat[14]	E16	wrxdat[5]	L4	N/C	T2	erxdat[3]	W2	pllrst(3)
B17	vccpll(1)	E17	vccio(d)	L5	vcc	T3	erxdat[4]	W3	nc
B18	gndpll(1)	E18	inref(d)	L15	gnd	T4	erxdat[5]	W4	nc
B19	pllout(0)	E19	ioctrl(d)	L16	N/C	T5	erxdat[6]	W5	nc
C1	wtxdat[15]	F1	inref(g)	L17	vccio(c)	T6	ioctrl(a)	W6	erxclav[0]
C2	vccpll(0)	F2	ioctrl(g)	L18	N/C	T7	N/C	W7	N/C
C3	N/C	F3	cellsize[5]	L19	N/C	T8	N/C	W8	N/C
C4	N/C	F4	cellsize[4]	M1	erxdat[15]	T9	N/C	W9	tdi
C5	vccio(f)	F5	gnd	M2	N/C	T10	N/C	W10	etxclk
C6	ioctrl(f)	F15	vcc	M3	N/C	T11	clk(3)	W11	N/C
C7	N/C	F16	ioctrl(d)	M4	N/C	T12	N/C	W12	N/C
C8	N/C	F17	wrxdat[6]	M5	vcc	T13	etxdat[12]	W13	etxdat[15]
C9	vccio(f)	F18	wrxdat[7]	M15	vcc	T14	etxdat[11]	W14	ioctrl(b)
C10	wrxclk	F19	wrxdat[8]	M16	inref(c)	T15	etxdat[8]	W15	etxdat[10]
C11	vccio(e)	G1	N/C	M17	N/C	T16	etxdat[4]	W16	etxdat[7]
C12	N/C	G2	cellsize[7]	M18	N/C	T17	vccpll(2)	W17	etxdat[2]
C13	N/C	G3	ioctrl(g)	M19	N/C	T18	etxsoc	W18	etxdat[0]
C14	N/C	G4	cellsize[6]	N1	ioctrl(h)	T19	etxclav[0]	W19	pllout(1)
C15	vccio(e)	G5	vcc	N2	erxdat[12]	U1	erxsoc		
C16	N/C	G15	vcc	N3	erxdat[13]	U2	erxdat[0]		
C17	N/C	G16	wrxdat[9]	N4	erxdat[14]	U3	vccpll(3)		
C18	N/C	G17	wrxdat[10]	N5	vcc	U4	erxdat[1]		
C19	N/C	G18	wrxdat[11]	N15	vcc	U5	vccio(a)		

11.0 References

- ATM Forum, Utopia Level 2, af-phy-0039.000

12.0 Contact

QuickLogic Corp.

Tel : 408 990 4000 (US)
: + 44 1932 57 9011 (Europe)
: + 49 89 930 86 170 (Germany)
: + 852 8106 9091 (Asia)
: + 81 45 470 5525 (Japan)

E-mail : info@quicklogic.com

Internet : www.quicklogic.com

