

**marking/ *Autdruck***

MEDER-Label, Type  
Production code,  
EN60062 / Factory code  
Circuit diagram

**MEDER-Logo, Typ**  
**Produktionscode**  
**EN60062/Fertigungsstätte**  
**Schaltbild**


**cable/ *Kabel***

PVC LIYY 2x0.25 mm<sup>2</sup>, grey  
colour of wires: white, brown (blue/brown)  
ends tinned  
PVC LIYY 2x0.25 mm<sup>2</sup>, grau  
Aderfarben: weiss, braun (blau/braun)  
Enden verzinkt

Abmessungen / dimensions (mm)  
Tolerances acc. to DIN ISO 2768-m


**switching distances**

*Schaltwege* 0 5 10 15 20 mm

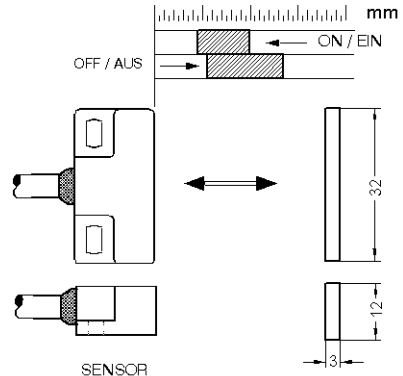

magnetically conductive material  
**Magnetisch leitendes Material**

**circuit diagram**  
*Schaltbild*



Magnetic properties	Conditions	Min	Typ	Max	Unit
Pull in	at 20 °C	4,5		10	mm
Drop out	at 20 °C	5,5		13,5	mm
Test equipment				SV 002	

Special Product Data	Conditions	Min	Typ	Max	Unit
Contact - form			A - NO		
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			10	W
operating voltage	DC or Peak AC			180	VDC
operating ampere	DC or Peak AC			1,25	A
Switching current	DC or Peak AC			0,5	A
Sensor-resistance	measured with 40% overdrive			380	mOhm
Housing material		PBT glass fibre reinforced			
Case color		blue			
Sealing compound		Polyurethan			

Environmental data	Conditions	Min	Typ	Max	Unit
Operating temperature	cable not moved	-30		80	°C
Operating temperature	cable moved	-5		80	°C
Storage temperature		-30		80	°C

Cable specification	Conditions	Min	Typ	Max	Unit
Cable typ		round cable			
Cable material		PVC			
Cross section		0,25 gmm			

General data	Conditions	Min	Typ	Max	Unit
Mounting advice		over 5m cable, a series resistor is recommended.			
mounting advice 1		Decreased switching distances by mounting on iron			
mounting advice 2		Magnetically conductive screws must not be used			
tightening torque	Screw M3 ISO 1207 Disk ISO 7089			0,5	Nm