

## LOW DROP POWER SCHOTTKY RECTIFIER

**Table 1: Main Product Characteristics**

$I_{F(AV)}$	0.5 A
$V_{RRM}$	20 V
$T_j(\max)$	150°C
$V_F(\max)$	0.30 V


### FEATURES AND BENEFITS

- Very small conduction losses
- Negligible switching losses
- Extremely fast switching
- Low forward voltage drop for higher efficiency and extended battery life
- Low thermal resistance
- Avalanche capability specified

### DESCRIPTION

Single Schottky rectifier suited for switch mode power supplies and high frequency DC to DC converters.

Packaged in STmite, this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications. Due to the small size of the package this device fits battery powered equipment (cellular, notebook, PDA's, printers) as well chargers and PCMCIA cards.

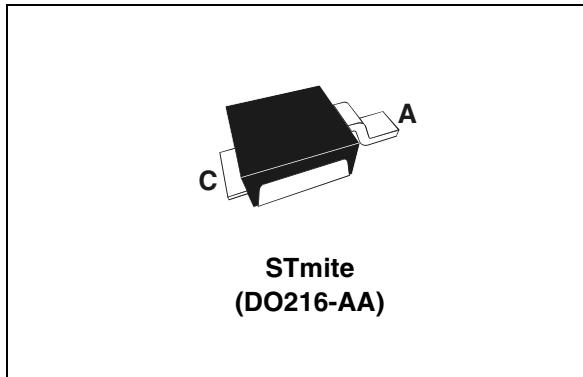

**STmite  
(DO216-AA)**

**Table 2: Order Code**

Part Number	Marking
STPS0520M	052

**Table 3: Absolute Ratings (limiting values)**

Symbol	Parameter	Value	Unit
$V_{RRM}$	Repetitive peak reverse voltage	20	V
$I_{F(RMS)}$	RMS forward voltage	2	A
$I_{F(AV)}$	Average forward current	$T_c = 140^\circ\text{C}$ $\delta = 0.5$	A
$I_{FSM}$	Surge non repetitive forward current	10 ms sinusoidal	A
$P_{ARM}$	Repetitive peak avalanche power	$t_p = 1\mu\text{s}$ $T_j = 25^\circ\text{C}$	W
$T_{stg}$	Storage temperature range	-65 to + 150	°C
$T_j$	Maximum operating junction temperature *	150	°C
$dV/dt$	Critical rate of rise of reverse voltage (rated $V_R$ , $T_j = 25^\circ\text{C}$ )	10000	V/ $\mu\text{s}$

\* :  $\frac{dP_{tot}}{dT_j} > \frac{1}{R_{th}(j-a)}$  thermal runaway condition for a diode on its own heatsink

## STPS0520M

**Table 4: Thermal Resistance**

Symbol	Parameter	Value	Unit
$R_{th(j-c)}^*$	Junction to case	20	°C/W
$R_{th(j-l)}^*$	Junction to ambient	250	°C/W

\* Mounted with minimum recommended pad size, PC board FR4.


**Table 5: Static Electrical Characteristics**

Symbol	Parameter	Tests conditions	Min.	Typ	Max.	Unit
$I_R^*$	Reverse leakage current	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$	15	50	µA
		$T_j = 100^\circ\text{C}$		2	6	mA
		$T_j = 25^\circ\text{C}$	$V_R = 10\text{V}$	7	25	µA
		$T_j = 100^\circ\text{C}$		1	3	mA
$V_F^*$	Forward voltage drop	$T_j = 25^\circ\text{C}$	$I_F = 1\text{A}$	0.30	0.33	V
		$T_j = 100^\circ\text{C}$		0.195	0.23	
		$T_j = 25^\circ\text{C}$	$I_F = 0.5\text{A}$	0.35	0.385	
		$T_j = 100^\circ\text{C}$		0.26	0.30	


Pulse test: \*  $t_p = 380 \mu\text{s}$ ,  $\delta < 2\%$

To evaluate the conduction losses use the following equation:  $P = 0.34 \times I_F(\text{AV}) + 0.07 I_F^2(\text{RMS})$


**Figure 1: Conduction losses versus average current**

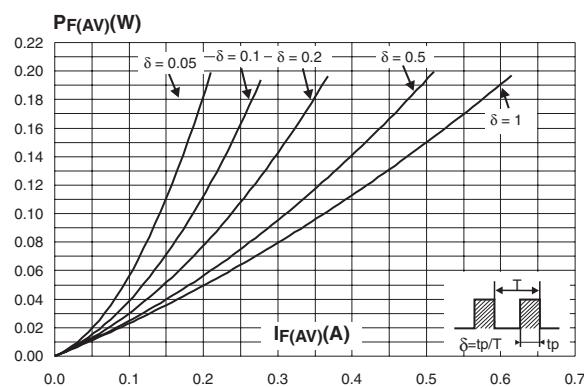


**Figure 2: Average forward current versus ambient temperature ( $\delta = 0.5$ )**

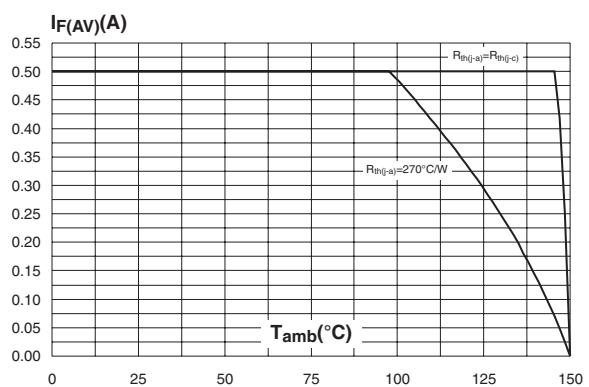


**Figure 3: Normalized avalanche power derating versus pulse duration**

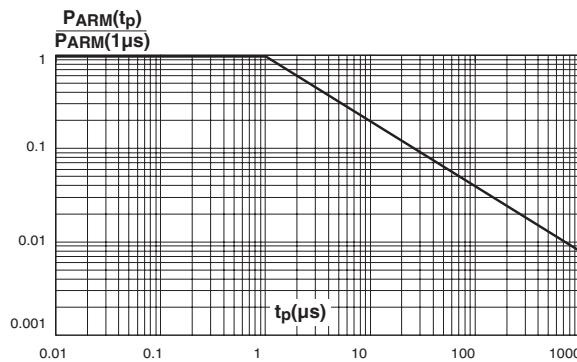


**Figure 5: Non repetitive surge peak forward current versus overload duration (maximum values)**

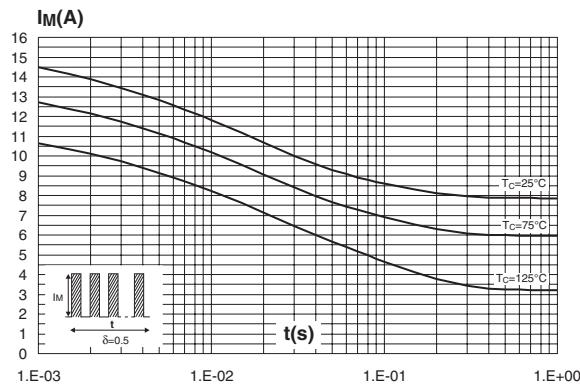


**Figure 7: Reverse leakage current versus reverse voltage applied (typical values)**

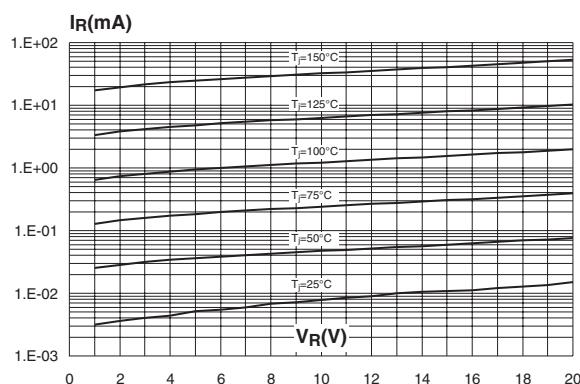


**Figure 4: Normalized avalanche power derating versus junction temperature**

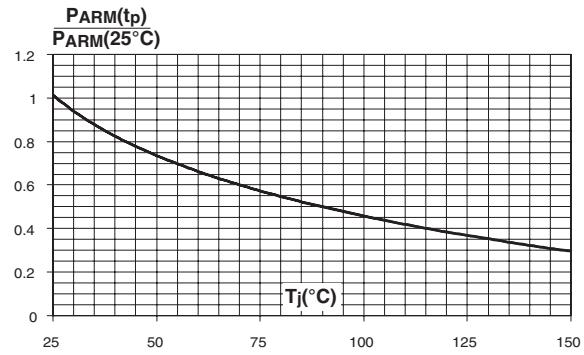

**Figure 6: Relative variation of thermal impedance junction to ambient versus pulse duration**

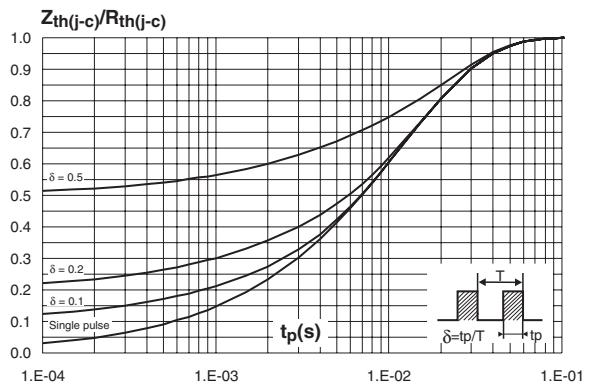


**Figure 8: Reverse leakage current versus junction temperature (typical values)**

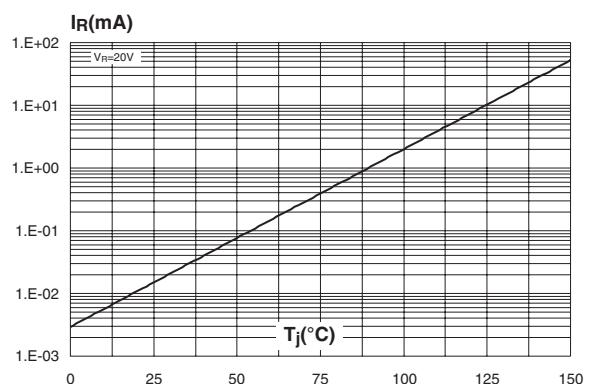


## STPS0520M

---


**Figure 9: Junction capacitance versus reverse voltage applied (typical values)**

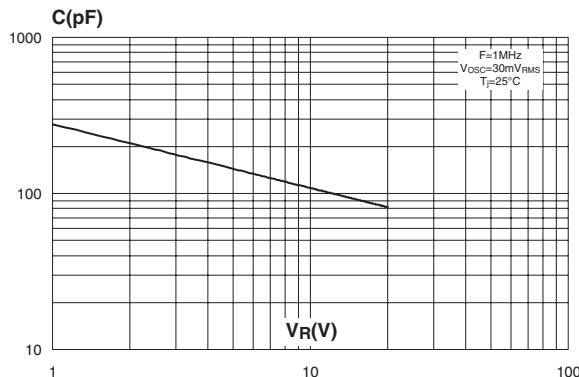

**Figure 10: Forward voltage drop versus forward current**

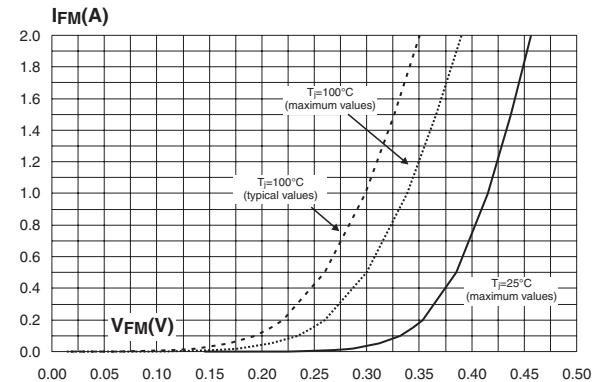


**Figure 11: Thermal resistance junction to ambient versus copper surface under tab (epoxy printed board FR4, Cu = 35μm, typical values)**

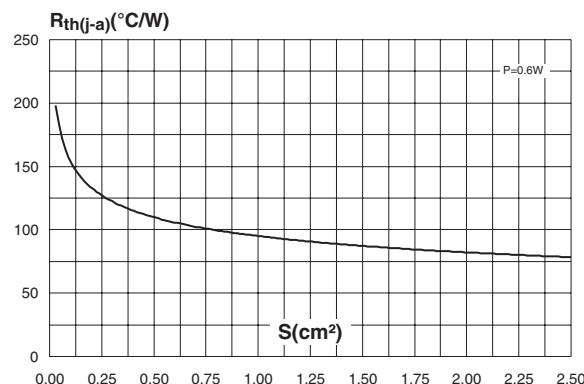

**Figure 12: STmite Package Mechanical Data**

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.85	1.00	1.15	0.033	0.039	0.045
A1	-0.05		0.05	-0.002		0.002
b	0.40		0.65	0.016		0.025
b2	0.70		1.00	0.027		0.039
c	0.10		0.25	0.004		0.010
D	1.75	1.90	2.05	0.069	0.007	0.081
E	1.75	1.90	2.05	0.069	0.007	0.081
H	3.60	3.75	3.90	0.142	0.148	0.154
L	0.50	0.63	0.80	0.020	0.025	0.031
L2	1.20	1.35	1.50	0.047	0.053	0.059
L3		0.50 ref			0.019 ref	
R	0.07			0.003		
R1	0.07			0.003		

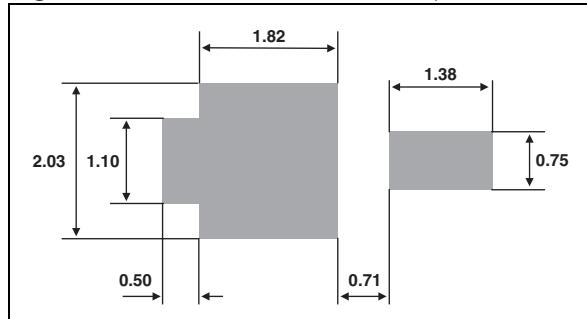**Figure 13: Foot Print Dimensions (in millimeters)****Table 6: Ordering Information**

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STPS0520M	052	STmite	15.5 mg	12000	Tape & reel

**Table 7: Revision History**

Date	Revision	Description of Changes
Jul-2003	2A	Last update.
13-Sep-2004	3	STmite package dimensions reference A1 change: from blank (min) to -0.05mm and from 0.10 (max) to 0.05mm.

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.  
All other names are the property of their respective owners

© 2004 STMicroelectronics - All rights reserved

**STMicroelectronics group of companies**

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -  
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America  
[www.st.com](http://www.st.com)