




ST2 Series




Panel Cutout

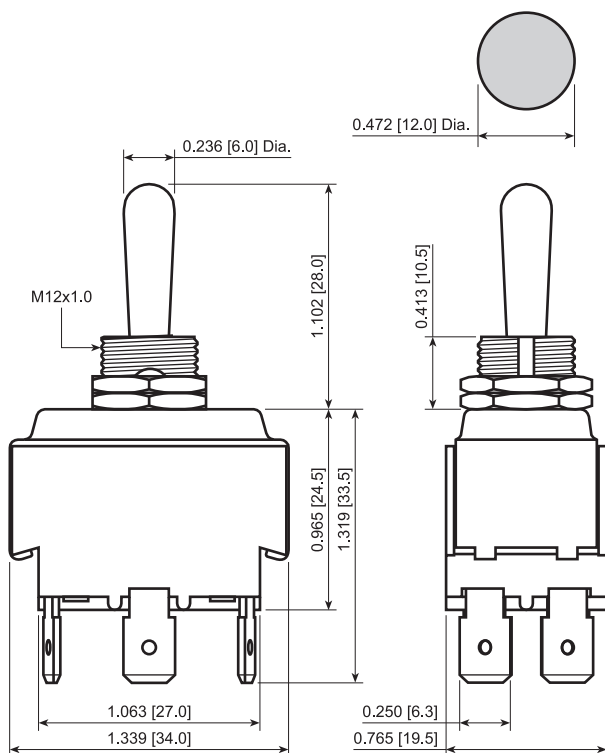


Bushing Options



Terminal Options

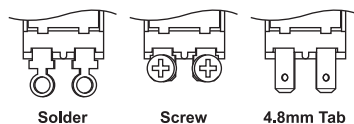

Water Protection Options



FEATURES:

- Heavy Duty Rating with UL Approvals
- Many Functions Available
- Tab, Screw, and Solder Terminal Options
- Rubber Boot for Water and Dust Protection

SPECIFICATIONS:

RATING: MAINTAINED SWITCHES:

20A 125VAC [cULus]
15A 250VAC [cULus]
2HP 125-250VAC [cULus]

MOMENTARY SWITCHES:

20A 125VAC [cULus]
15A 250VAC [cULus]
1.5HP 125-250VAC [cULus]

TEMPERATURE: -20°C to 85°C

ELECTRICAL LIFE: 6,000 Cycles

CONTACT RESISTANCE: 50mΩ Max.

INSULATION RESISTANCE: 800MΩ Min. at 500VDC

DIELECTRIC STRENGTH: 1,500VAC for 1 Minute

MATERIALS:

BODY: Phenolic, UL94 V-0

ACTUATOR: Nickel Plated Brass

BUSHING: Nickel Plated Brass

HOUSING: Stainless Steel

CONTACTS: Silver Alloy

TERMINALS: Silver Plated Brass

Series	Terminal	Function	Rating	Actuator Type	Bushing Type
ST2	1 - 4.8mm Tabs 2 - Solder 4 - 6.3mm Tabs 6 - Screw	2 Pole: 2 - Off-On G - On-On E - Off-(On) 6 - On-Off-On J - On-Off-(On) K - (On)-Off-(On)	D - 20A 125VAC	0 - Standard Bat	0 - M12x1.0 2 - 15/32\"-32UNS

Note:
Terminal bridging options available. See "Z02" function for polarity reversal in example photo.



ST226D00
ACC-B03-2
ACC-M01-3

ST24Z02D00



Accessories Series	Type	Options
ACC	Rubber Boot: B03 - For Standard Bat	Colors for Boot: 2 - Black
	Marking Plates: M01 - ON/OFF	Colors for Marking Plates: 3 - Black, Red, and Silver
	Hardware: N02 - Knurled Nut	Threading: 3 - 15/32\"-32UNS 5 - M12x1.0

EXAMPLE PART NUMBERS:

ST242D00 2P Off-On
Standard Actuator/Bushing, 0.250\" QC

ST246D00 2P On-Off-On
Standard Actuator/Bushing, 0.250\" QC



Ph: 503-297-8878 • Fax: 503-297-8879

25

P.O. Box 25110 • Portland, OR 97298 USA • www.lambind.com

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

TOGGLE