

# Isolation Transformers for LAN-Ethernet Applications


## EPA1885-X & EPA1885-X-RC



- Designed for IEEE 802.3 and ECMA Requirements
- Available in Low Profile S.O.I.C. 16 Pin SMD Package
- Add “-RC” after part number for RoHS Compliant
- Hipot : both 2000 Vrms and 500 Vrms available in compliance with LAN's Safety Requirements

### Electrical Parameters @ 25° C

PCA Part Number	OCL (μH ± 20%)	Interwinding Capacitance (pF Max.)	Leakage Inductance (μH Max.)	Et-Constant (V-μSec. Typ.)	Rise Time (nS Max.)	Turns Ratio (± 5%)	DCR (Max.)
EPA1885-1(-RC)	25	5	0.15	2.0	3.0	1:1	0.15
EPA1885-2(-RC)	30	5	0.15	2.0	3.0	1:1	0.15
EPA1885-3(-RC)	35	6	0.15	2.0	3.0	1:1	0.20
EPA1885-4(-RC)	50	7	0.20	2.0	3.0	1:1	0.20
EPA1885-5(-RC)	75	8	0.20	2.4	3.0	1:1	0.30
EPA1885-6(-RC)	100	9	0.25	2.5	3.0	1:1	0.30
EPA1885-7(-RC)	125	10	0.25	3.0	3.0	1:1	0.30
EPA1885-8(-RC)	150	11	0.25	3.0	3.0	1:1	0.40
EPA1885-9(-RC)	175	12	0.25	3.0	3.5	1:1	0.50
EPA1885-10(-RC)	200	13	0.30	3.5	3.5	1:1	0.50

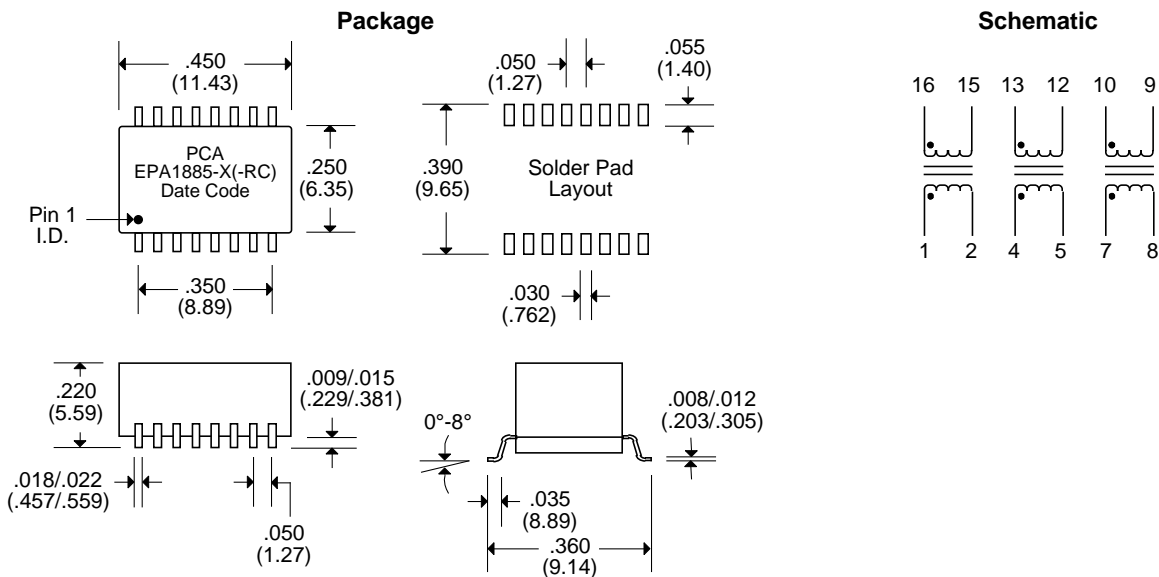

Notes :	EPA1885-X	EPA1885-X-RC
1. Lead Finish	SnPb	Hot Tin Dip (Sn) †
2. Peak Temperature Rating	225°C	245°C
3. Moisture Sensitive Levels	MSL = 3 (168 Hours, 30°C/60%RH)	MSL = 4 (72 Hours, 30°C/60%RH)
4. Weight	TBD grams	TBD grams
5. Packaging Information (Tube)	TBD pieces/tube	TBD pieces/tube
(*Add "TR" to end of part number, but in front of "-RC" when placing order) (Tape & Reel)	TBD pieces/13" reel (*EPA1885-XTR)	TBD pieces/13" reel (*EPA1885-XTR-RC)

† Hot tin dipped over Matte Tin with Ni Barrier

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 /.25