



**667-079**  
**Composite Receptacle Cover**  
**for MIL-DTL-38999 Series III Connectors**  
**with Anti-Rotation Device**

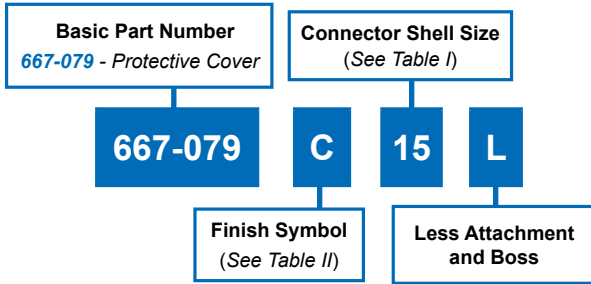

| TABLE II |   |
|----------|---|
| Symbol   | Finish Description  |
| XB       | No Plating - Black Color (Non-Conductive Finish)                                    |
| XM       | 2000 Hour Corrosion Resistant Electroless Nickel                                    |
| XMT      | 2000 Hour Corrosion Resistant Ni-PTFE, Nickel-Fluorocarbon Polymer. 1000 Hour Grey™ |
| XO       | No Plating - Brown Color (Non-Conductive Finish)                                    |
| XW       | 2000 Hour Corrosion Resistant Cadmium/Olive Drab over Electroless Nickel            |

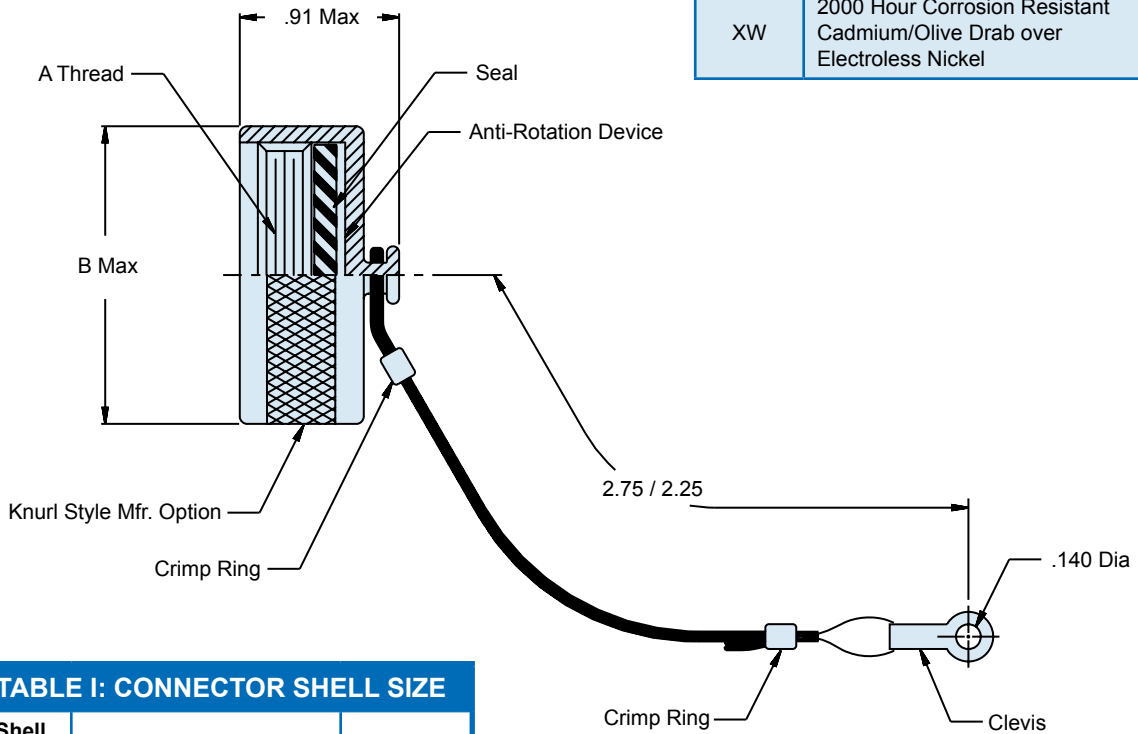

| TABLE I: CONNECTOR SHELL SIZE |                     |       |
|-------------------------------|---------------------|-------|
| Shell Size                    | A Thread            | B Max |
| 09                            | .6250-0.1P-0.3L-TS  | .906  |
| 11                            | .7500-0.1P-0.3L-TS  | 1.102 |
| 13                            | .8750-0.1P-0.3L-TS  | 1.220 |
| 15                            | 1.0000-0.1P-0.3L-TS | 1.260 |
| 17                            | 1.1875-0.1P-0.3L-TS | 1.457 |
| 19                            | 1.2500-0.1P-0.3L-TS | 1.535 |
| 21                            | 1.3750-0.1P-0.3L-TS | 1.654 |
| 23                            | 1.5000-0.1P-0.3L-TS | 1.772 |
| 25                            | 1.6250-0.1P-0.3L-TS | 1.929 |

Metric dimensions (mm) are in parentheses and are for reference only.