

# New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.  
SPRINGFIELD, NEW JERSEY 07081  
U.S.A.


TELEPHONE: (201) 376-2922  
(212) 227-6005  
FAX: (201) 376-8960

Type	V <sub>ZT</sub> @ I <sub>ZT</sub> * nom (V)	I <sub>ZT</sub> * (mA)	r <sub>ZT</sub> @ I <sub>ZT</sub> * max. (Ω)	r <sub>ZK</sub> @ I <sub>ZK</sub> 1.0 mA Ω	I <sub>R</sub> @ V <sub>R</sub> max. (μA)	V <sub>R</sub> (V)	αV <sub>Z</sub> typ. (10 <sup>-4</sup> /°C)	I <sub>ZM</sub> T <sub>A</sub> 75°C max. (mA)	I <sub>ZSM</sub> ** (A)	ΔV <sub>Z</sub> *** max. (V)	Package
------	---	---------------------------	--	--	---	-----------------------	---	---	----------------------------	---------------------------------------	---------

5 W/T<sub>A</sub> = 75°C T<sub>j</sub> max = 200°C

V<sub>F</sub> ≤ 1.2 V (T<sub>A</sub> = 25°C, I<sub>F</sub> = 1A)

1N 5334 B	3.6	350	2.5	500	150	1.0	- 5.5	1320	20.4	0.80	
1N 5335 B	3.9	320	2.0	500	50	1.0	- 5	1220	18.8	0.54	
1N 5336 B	4.3	290	2.0	500	10	1.0	- 4	1100	17.0	0.49	
1N 5337 B	4.7	260	2.0	450	5.0	1.0	- 2	1010	15.6	0.44	
• 1N 5338 B	5.1	240	1.5	400	1.0	1.0	1	930	14.4	0.39	
• 1N 5339 B	5.6	220	1.0	400	1.0	2.0	2.5	865	13.1	0.25	
1N 5340 B	6.0	200	1.0	300	1.0	3.0	2.8	790	12.2	0.19	
• 1N 5341 B	6.2	200	1.0	200	1.0	3.0	3.2	765	11.8	0.10	
1N 5342 B	6.8	175	1.0	200	10	5.2	4	700	10.8	0.15	
1N 5343 B	7.5	175	1.5	200	10	5.7	4.5	630	9.8	0.15	
• 1N 5344 B	8.2	150	1.5	200	10	6.2	4.8	580	8.9	0.20	
1N 5345 B	8.7	150	2.0	200	10	6.6	4.9	545	8.4	0.20	
• 1N 5346 B	9.1	150	2.0	150	7.5	6.9	5.1	520	8.1	0.22	
1N 5347 B	10	125	2.0	125	5.0	7.6	5.5	475	7.3	0.22	
1N 5348 B	11	125	2.5	125	5.0	8.4	6	430	11.0	0.25	
• 1N 5349 B	12	100	2.5	125	2.0	9.1	6.5	395	10.1	0.25	
• 1N 5350 B	13	100	2.5	100	1.0	9.9	6.5	365	9.3	0.25	
1N 5351 B	14	100	2.5	75	1.0	10.6	7	340	8.6	0.25	
• 1N 5352 B	15	75	2.5	75	1.0	11.5	7	315	8.1	0.25	
• 1N 5353 B	16	75	2.5	75	1.0	12.2	7	295	7.6	0.30	
1N 5354 B	17	70	2.5	75	0.5	12.9	7	280	7.1	0.35	
• 1N 5355 B	18	65	2.5	75	0.5	13.7	7.5	264	6.7	0.40	
1N 5356 B	19	65	3.0	75	0.5	14.4	7.5	250	6.4	0.40	
1N 5357 B	20	65	3.0	75	0.5	15.2	7.5	237	6.0	0.40	
• 1N 5358 B	22	50	3.5	75	0.5	16.7	8	216	5.5	0.45	
• 1N 5359 B	24	50	3.5	100	0.5	18.2	8	198	5.0	0.55	
1N 5360 B	25	50	4.0	110	0.5	19.0	8	190	4.8	0.55	
• 1N 5361 B	27	50	5.0	120	0.5	20.6	8.5	176	4.5	0.60	
1N 5362 B	28	50	6.0	130	0.5	21.2	8.5	170	4.3	0.60	
• 1N 5363 B	30	40	8.0	140	0.5	22.8	8.5	158	4.0	0.60	
• 1N 5364 B	33	40	10	150	0.5	25.1	8.5	144	3.7	0.60	
• 1N 5365 B	36	30	11	160	0.5	27.4	9	132	3.4	0.65	
• 1N 5366 B	39	30	14	170	0.5	29.7	9	122	3.1	0.65	
1N 5367 B	43	30	20	190	0.5	32.7	9	110	2.8	0.70	
1N 5368 B	47	25	25	210	0.5	35.8	9	100	2.6	0.80	
1N 5369 B	51	25	27	230	0.5	38.8	9	93	2.4	0.90	
• 1N 5370 B	56	20	35	280	0.5	42.6	9	86	2.2	1.00	
1N 5371 B	60	20	40	350	0.5	45.5	9	79	2.0	1.20	
• 1N 5372 B	62	20	42	400	0.5	47.1	9	76	1.9	1.35	
1N 5373 B	68	20	44	500	0.5	51.7	9	70	1.8	1.50	
1N 5374 B	75	20	45	620	0.5	56.0	9	63	1.6	1.60	
1N 5375 B	82	15	65	720	0.5	62.2	9	58	1.5	1.80	
1N 5376 B	87	15	75	760	0.5	66.0	9	54.5	1.4	2.00	
1N 5377 B	91	15	75	760	0.5	69.2	9	52.5	1.3	2.20	
1N 5378 B	100	12	90	800	0.5	76.0	9.5	47.5	1.2	2.50	
1N 5379 B	110	12	125	1000	0.5	83.6	9.5	43	1.1	2.50	
1N 5380 B	120	10	170	1150	0.5	91.2	9.5	39.5	1.0	2.50	
1N 5381 B	130	10	190	1250	0.5	98.8	9.5	36.5	0.93	2.50	
1N 5382 B	140	8.0	230	1500	0.5	106	9.5	34	0.86	2.50	
• 1N 5383 B	150	8.0	330	1500	0.5	114	9.5	31.6	0.81	3.00	
1N 5384 B	160	8.0	350	1650	0.5	122	9.5	29.4	0.76	3.00	
1N 5385 B	170	8.0	380	1750	0.5	129	9.5	28	0.71	3.00	
1N 5386 B	180	5.0	430	1750	0.5	137	9.5	26.4	0.67	4.00	
1N 5387 B	190	5.0	450	1850	0.5	144	9.5	25	0.64	5.00	
• 1N 5388 B	200	5.0	480	1850	0.5	152	10	23.6	0.60	5.00	

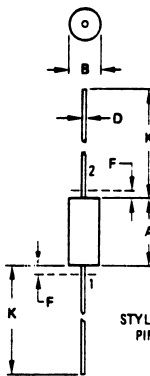

DIM	MILLIMETERS		INC
	MIN	MAX	
A	8.38	8.89	0.330
B	3.30	3.68	0.130
D	0.94	1.09	0.037
F	-	1.27	-
K	25.40	31.75	1.000

NOTE:  
1. LEAD DIAMETER & FINISH  
CONTROLLED WITHIN DI

\* Pulse test t<sub>p</sub> ≤ 50 ms δ < 2%

\*\* Rectangular waveform (t<sub>p</sub> = 10 ms).

\*\*\* Measured between 10% and 50% of I<sub>ZM</sub>.

• Preferred voltages.

Tolerance on nominal V<sub>ZT</sub> value: ± 5%.