

# SMD Power Inductor CDRH105R



Halogen Free



## Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 10.5 × 10.3 × 5.1mm Max.
- Product weight: 1.8g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

## Environmental Data

- Operating temperature range: -40°C~+100°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+100°C
- Solder reflow temperature: 260 °C peak.


## Packaging

- Carrier tape and reel packaging.
- 12.9" diameter reel.
- 500pcs per reel.



## Applications

- Ideally used in Notebook PC, LCD TV, DVD, Game machine, STB, Projector etc as DC-DC converter inductors.


## Dimension - [mm]

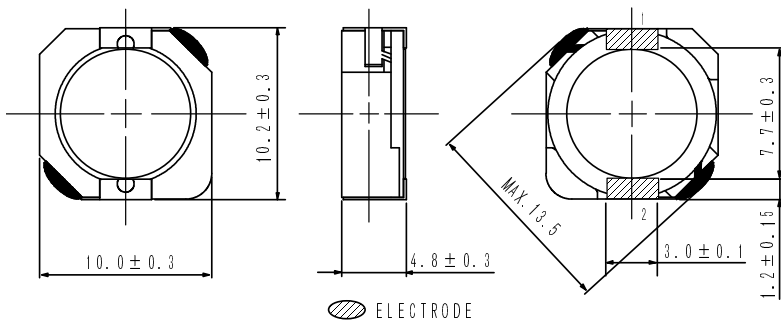


## Land pattern and Schematics - [mm]



(0.8 μH ~ 22 μH)



(27 μH ~ 82 μH)



(100 μH ~ 1.0mH)

# SMD Power Inductor CDRH105R



## Electrical Characteristics

Part Name	Stamp	Inductance ( $\mu$ H) [ within ] ※1	D.C.R. (m $\Omega$ ) Max. (Typ.) (at 20°C)	Saturation Current ( A )※2	Temperature Rise Current ( A ) ※3
CDRH105RNP-0R8NC	0R8	0.8 $\pm$ 30%	4.3 (3.3)	13.5	9.50
CDRH105RNP-1R5NC	1R5	1.5 $\pm$ 30%	5.8 (4.5)	10.5	8.30
CDRH105RNP-2R2NC	2R2	2.2 $\pm$ 30%	7.2 (5.6)	9.25	7.50
CDRH105RNP-3R3NC	3R3	3.3 $\pm$ 30%	10.4 (8.0)	7.80	6.50
CDRH105RNP-4R7NC	4R7	4.7 $\pm$ 30%	12.3 (9.5)	6.40	6.10
CDRH105RNP-6R8NC	6R8	6.8 $\pm$ 30%	18.0 (14.0)	5.40	5.40
CDRH105RNP-8R2NC	8R2	8.2 $\pm$ 30%	20.0 (16.0)	4.85	5.00
CDRH105RNP-100NC	100	10 $\pm$ 30%	26.0 (20.0)	4.45	4.50
CDRH105RNP-120NC	120	12 $\pm$ 30%	33.0 (25.0)	4.00	3.80
CDRH105RNP-150NC	150	15 $\pm$ 30%	41.0 (32.0)	3.60	3.40
CDRH105RNP-180NC	180	18 $\pm$ 30%	46.0 (35.0)	3.20	3.10
CDRH105RNP-220NC	220	22 $\pm$ 30%	61.0 (47.0)	2.95	2.90
CDRH105RNP-270NC	270	27 $\pm$ 30%	69.0 (53.0)	2.70	2.60
CDRH105RNP-330NC	330	33 $\pm$ 30%	84.0 (65.0)	2.40	2.50
CDRH105RNP-390NC	390	39 $\pm$ 30%	106 (82.0)	2.30	2.25
CDRH105RNP-470NC	470	47 $\pm$ 30%	130 (100)	2.00	2.00
CDRH105RNP-560NC	560	56 $\pm$ 30%	149 (115)	1.90	1.90
CDRH105RNP-680NC	680	68 $\pm$ 30%	201 (155)	1.65	1.60
CDRH105RNP-820NC	820	82 $\pm$ 30%	227 (175)	1.50	1.45
CDRH105RNP-101NC	101	100 $\pm$ 30%	253 (195)	1.35	1.35
CDRH105RNP-121NC	121	120 $\pm$ 30%	303 (233)	1.28	1.18
CDRH105RNP-151NC	151	150 $\pm$ 30%	370 (285)	1.12	1.10
CDRH105RNP-181NC	181	180 $\pm$ 30%	419 (322)	1.04	1.00
CDRH105RNP-221NC	221	220 $\pm$ 30%	500 (385)	0.94	0.94
CDRH105RNP-271NC	271	270 $\pm$ 30%	672 (512)	0.84	0.80
CDRH105RNP-331NC	331	330 $\pm$ 30%	812 (625)	0.75	0.73
CDRH105RNP-391NC	391	390 $\pm$ 30%	953 (733)	0.70	0.70
CDRH105RNP-471NC	471	470 $\pm$ 30%	1289 (992)	0.60	0.54
CDRH105RNP-561NC	561	560 $\pm$ 30%	1430 (1100)	0.54	0.52
CDRH105RNP-681NC	681	680 $\pm$ 30%	1599 (1230)	0.52	0.51
CDRH105RNP-821NC	821	820 $\pm$ 30%	1768 (1360)	0.50	0.48
CDRH105RNP-102NC	102	1000 $\pm$ 30%	1989 (1530)	0.48	0.42

※1 Inductance measuring condition: at 100kHz.


※2 The saturation current: This indicates the value of DC current when the inductance decreases to 65% of its nominal.

※3 The temperature rise: The value of DC current when the temperature rise is  $\Delta T=40^{\circ}\text{C}$  ( $T_a=20^{\circ}\text{C}$ ).

# SMD Power Inductor CDRH105R



## Saturation Current & Temperature Rise Graph












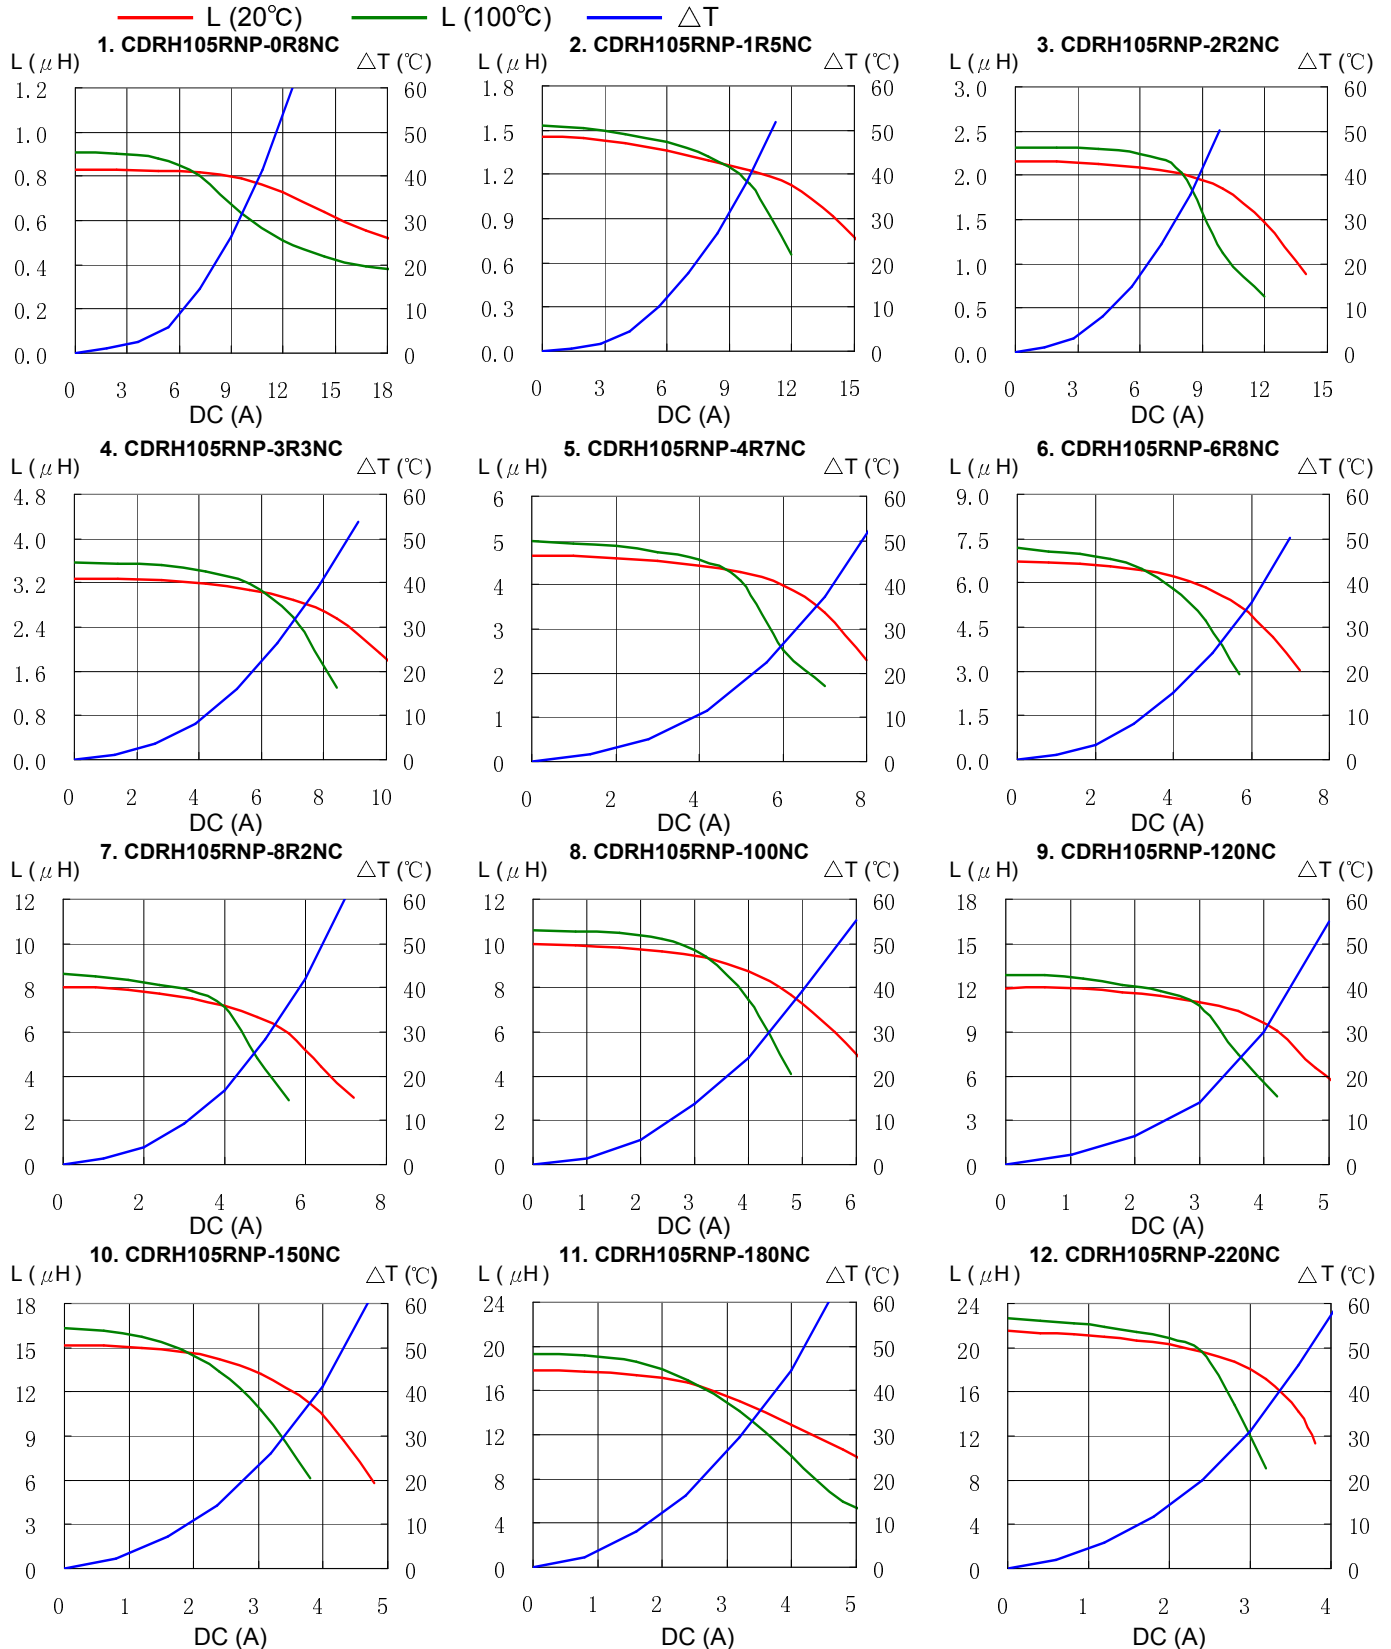


# SMD Power Inductor CDRH105R



## Saturation Current & Temperature Rise Graph


— L (20°C) — L (100°C) —  $\Delta T$

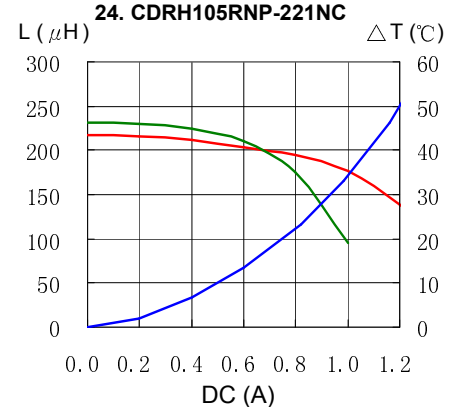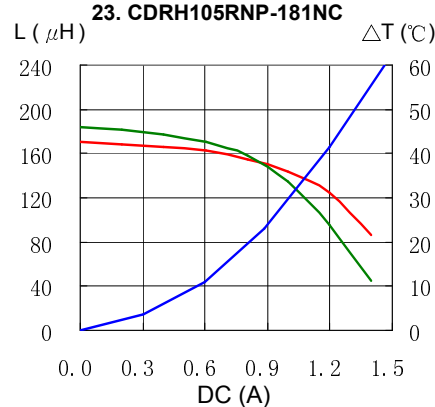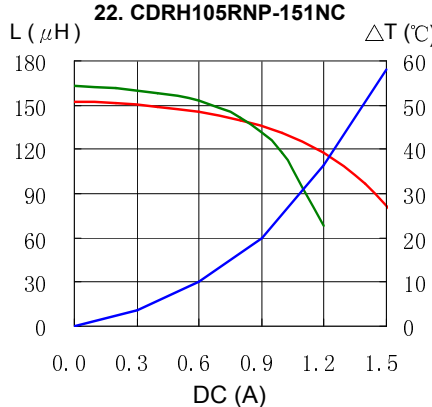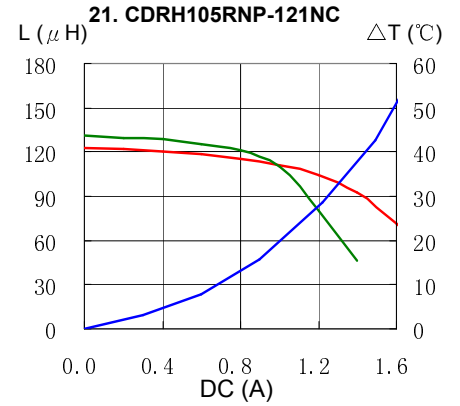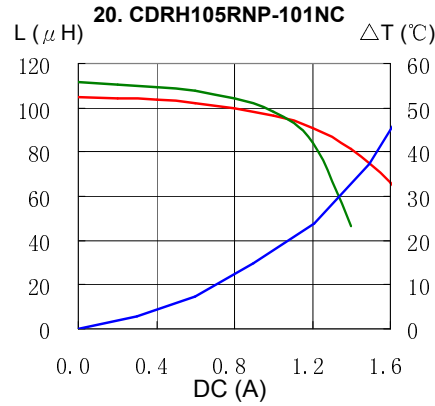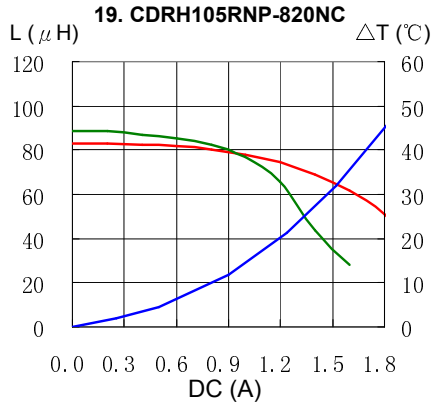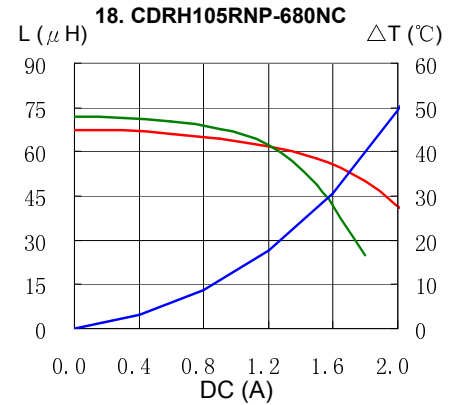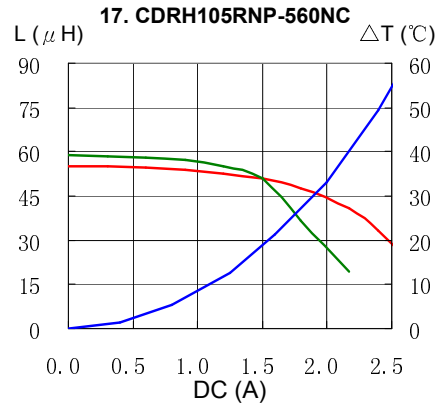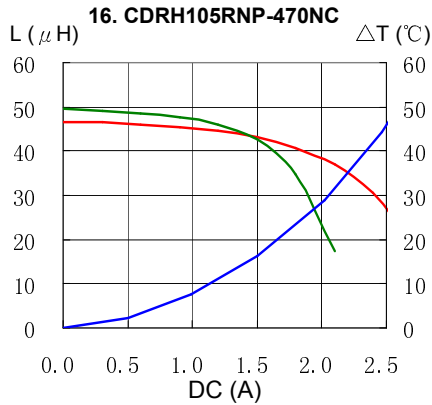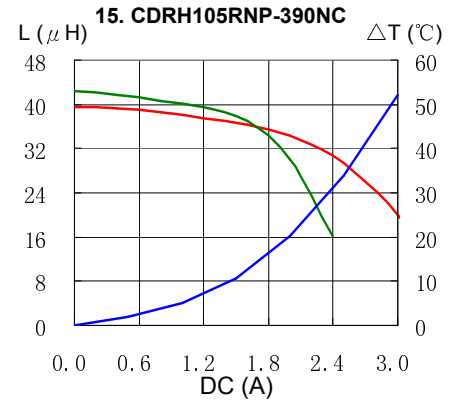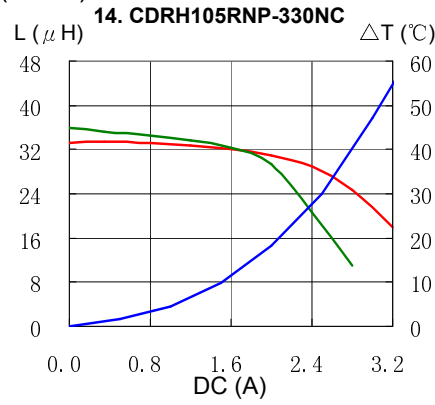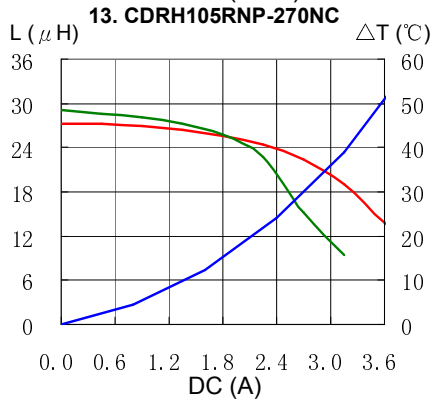

# SMD Power Inductor CDRH105R





## Saturation Current & Temperature Rise Graph

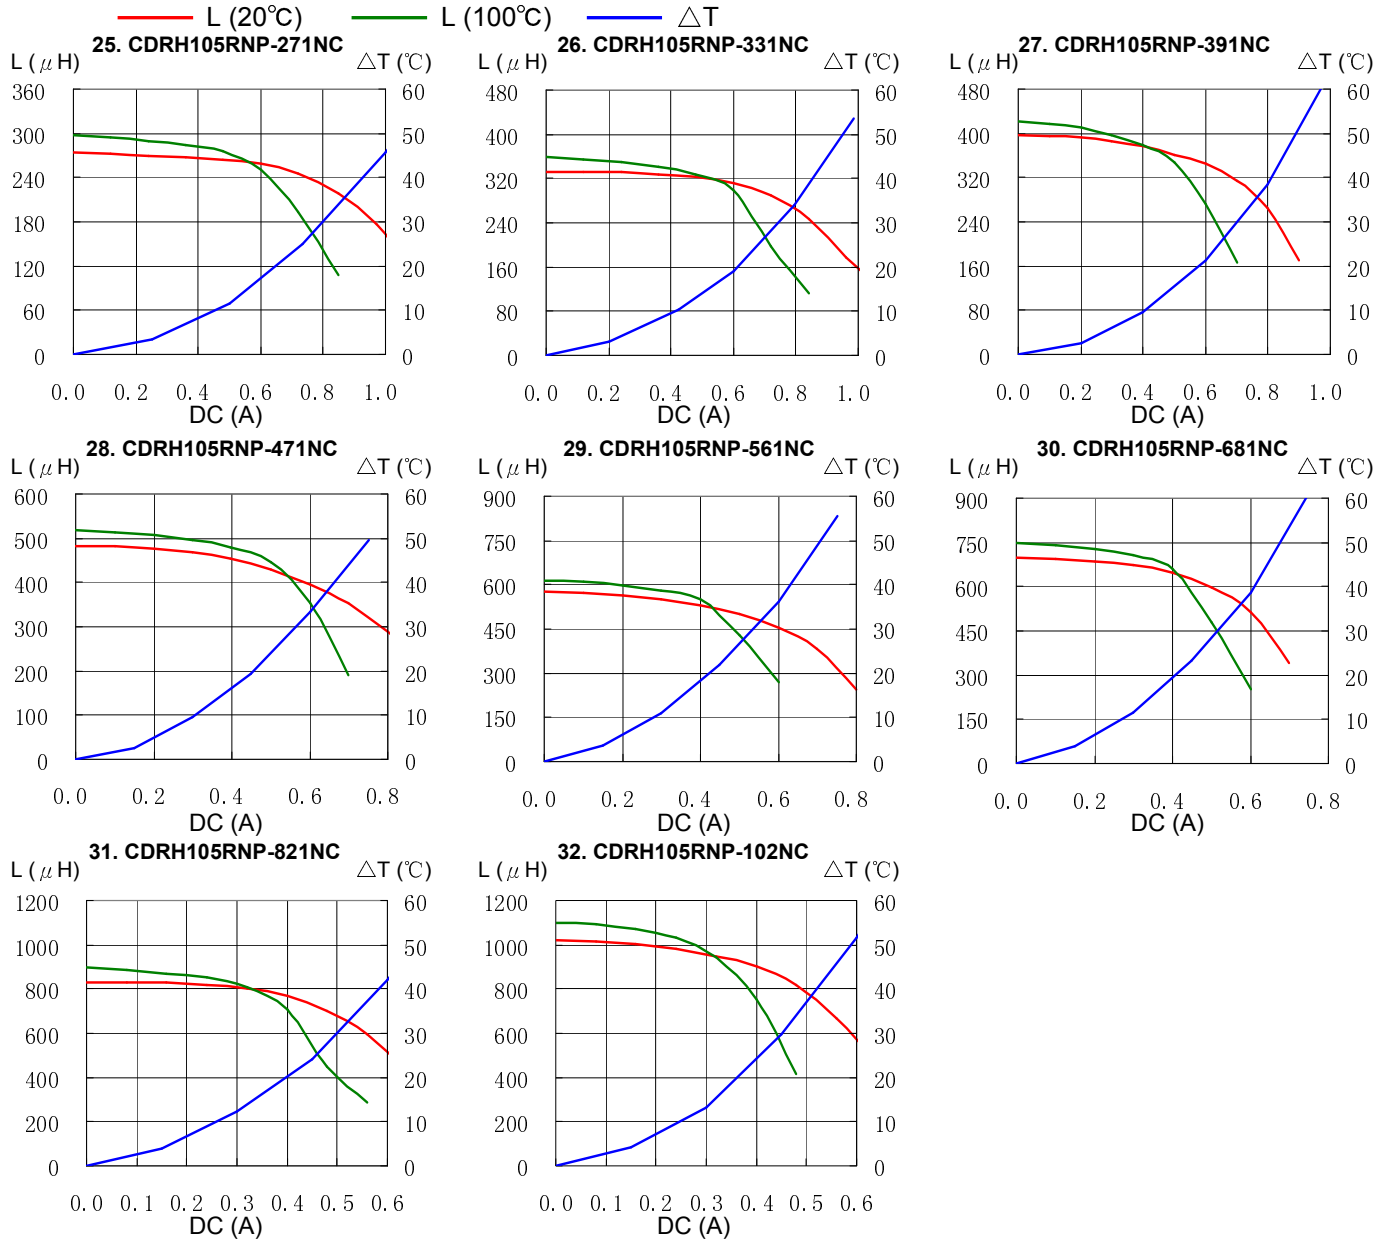

# SMD Power Inductor CDRH105R



## Solder Reflow Condition

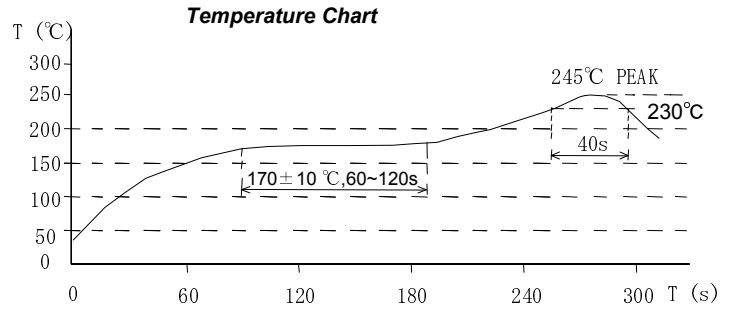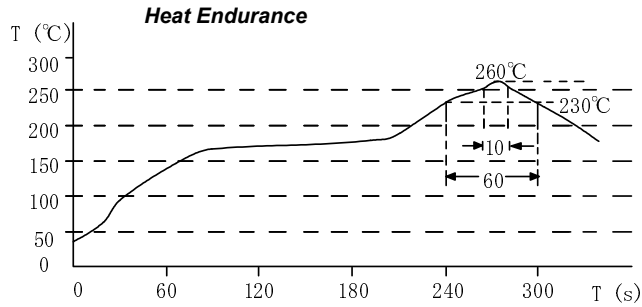

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6688  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Tokyo

Tel.+81-3-5202-7112  
FAX.+81-3-5202-7105  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-021-5836-3299  
FAX.+86-021-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Oberzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@sumida-eu.com](mailto:contact@sumida-eu.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6296-3390  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Sumida:

[CDRH105RNP-2R2NC](#) [CDRH105RNP-470NC](#) [CDRH105RNP-221NC](#) [CDRH105RNP-150NC](#) [CDRH105RNP-820NC](#) [CDRH105RNP-3R3NC](#) [CDRH105RNP-8R2NC](#) [CDRH105RNP-220NC](#) [CDRH105RNP-6R8NC](#) [CDRH105RNP-1R5NC](#) [CDRH105RNP-4R7NC](#) [CDRH105RNP-0R8NC](#) [CDRH105RNP-330NC](#) [CDRH105RNP-151NC](#) [CDRH105RNP-680NC](#) [CDRH105RNP-100NC](#) [CDRH105RNP-331NC](#) [CDRH105RNP-560NC](#) [CDRH105RNP-101NC](#)