
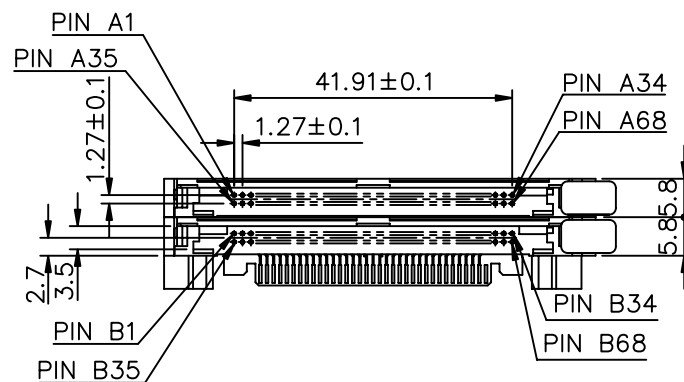


PRODUCT NO.	STAND-OFF HEIGHT
52493-250CA	5.0 mm
52493-250CALF	5.0 mm

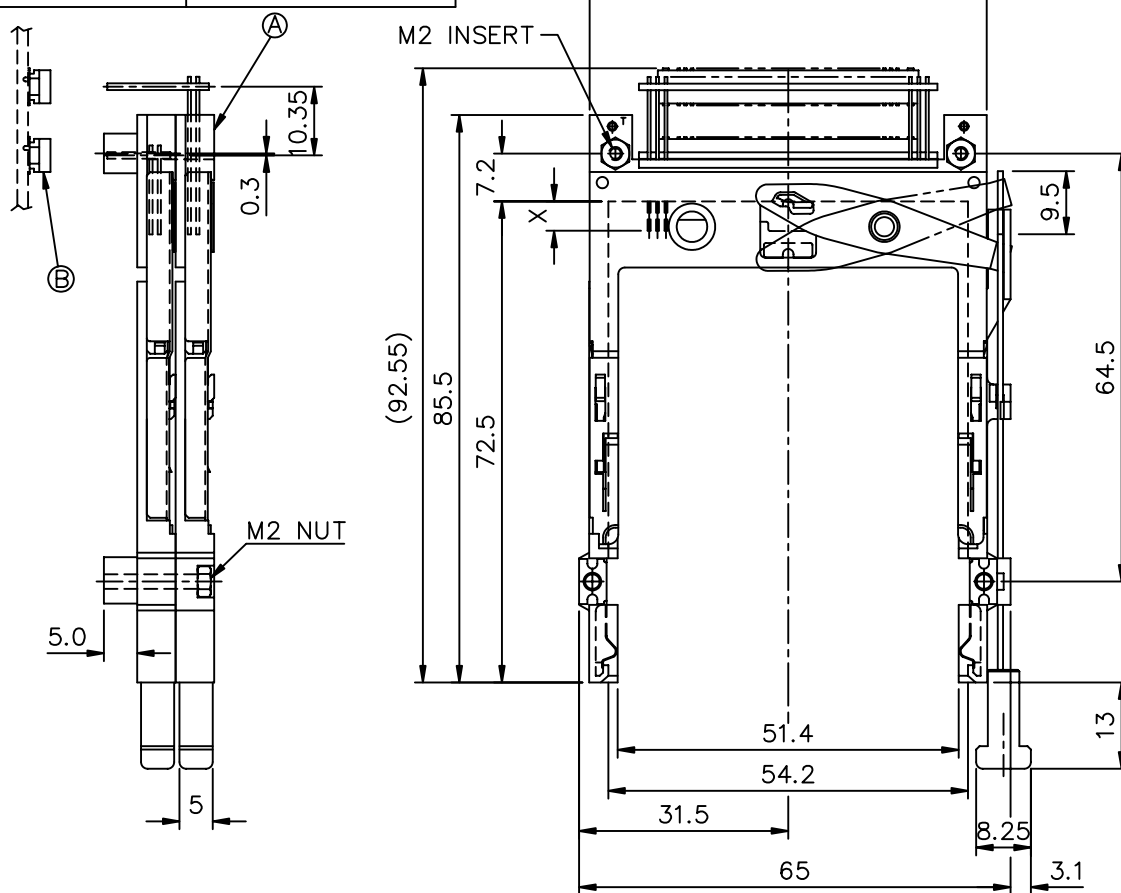

NOTES:

- 8mm MIN. CARD EJECT.
- EJECT TRAVEL: 9.5mm
- MATERIAL
 - 3.1 HEADER ASS'Y
 - PLASTIC : HOUSING ...LCP UL94V-0 BLACK
 - PIN : COPPER ALLOY
 - PCB : FR4
 - 3.2 EJECT MECHANISM ASS'Y
 - PLASTIC : GUIDE: POLYPHTHARAMID UL94V-0 BLACK
 - BUTTON: POLYPHTHARAMID UL94V-0 BLACK
 - PLATE : STAINLESS
 - EMI CONTACT: PHOSPHOR BRONZE
 - 3.3 RECEPTACLE
 - PLASTIC : LCP 94V-0, NATURAL.
 - PIN: BeCu
4. FINISH (PIN)
 - UNDER PLATING : 0.5 um MIN. Ni
 - CONTACT AREA : 0.1 um MIN. GOLD OVER
 - 0.5 um MIN. Pd-Ni
 - SOLDER TAIL : 2.5 um MIN. Sn-Pb
 - 2.5 um MIN. PURE Sn. (FOR -250CALF)
- ⑤ PUSH ROD LOCATION AND P.C.B. SIDE ARE AS APPEARS INSTALLED.
6. DIM "X"

4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68
7. IF LEAD FREE P/N. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
8. LEAD FREE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
9. IF LEAD FREE P/N. PACKAGING MEETS GS-14-920 SPECIFICATION

ORDERING INFORMATION

NAME	PART NO.	Q'TY
① EJECT HEADER ASS'Y	52493-250CA/250CALF	1
② MATING RECEPTACLE	91931-31169/31169LF	2

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS			
rev.	ecn no.	dr	date	linear	± 0.3	projection	title	product family : PCMCIA		code	
A	T90430	WL	12/27/99								
B	N05-0128	WB	12/27/99	angles	± 2°	unit mm/inch	size	dwg no.	scale	sheet	1 OF 2
				dr	MAGGIE WU	12/01/99					
				enr	LEIF SHEN	12/01/99					
				chr	JOSEPH HSIA	12/01/99					
				appd	JENN TSAO	12/01/99					
sheet	revision	B	A								
index	sheet	1	2								

All rights strictly reserved. Reproduction of this document in any form or by any means without the written permission of BERG ELECTRONICS is not permitted without the written permission of BERG ELECTRONICS. Property of c BERG ELECTRONICS. Copyright BERG ELECTRONICS by