
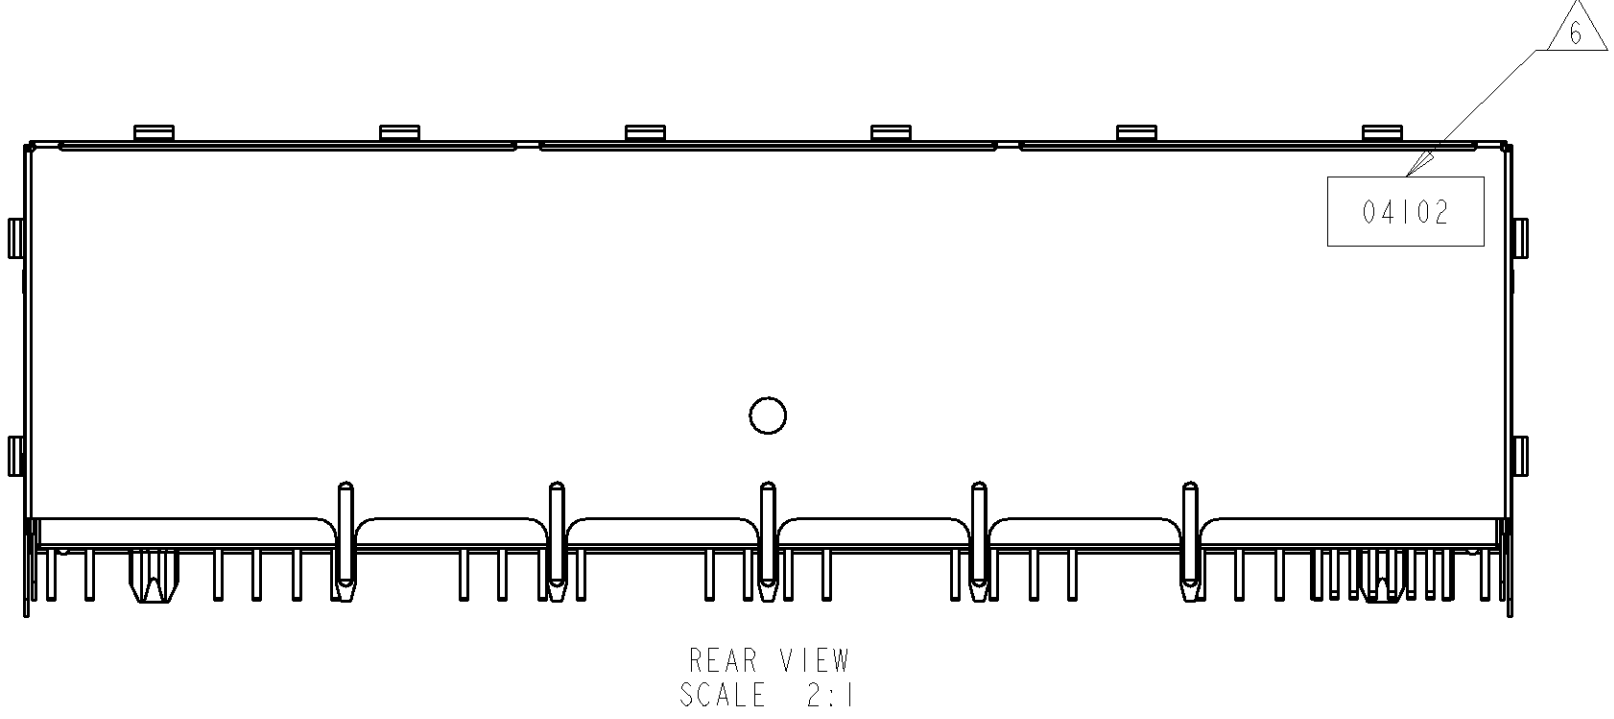
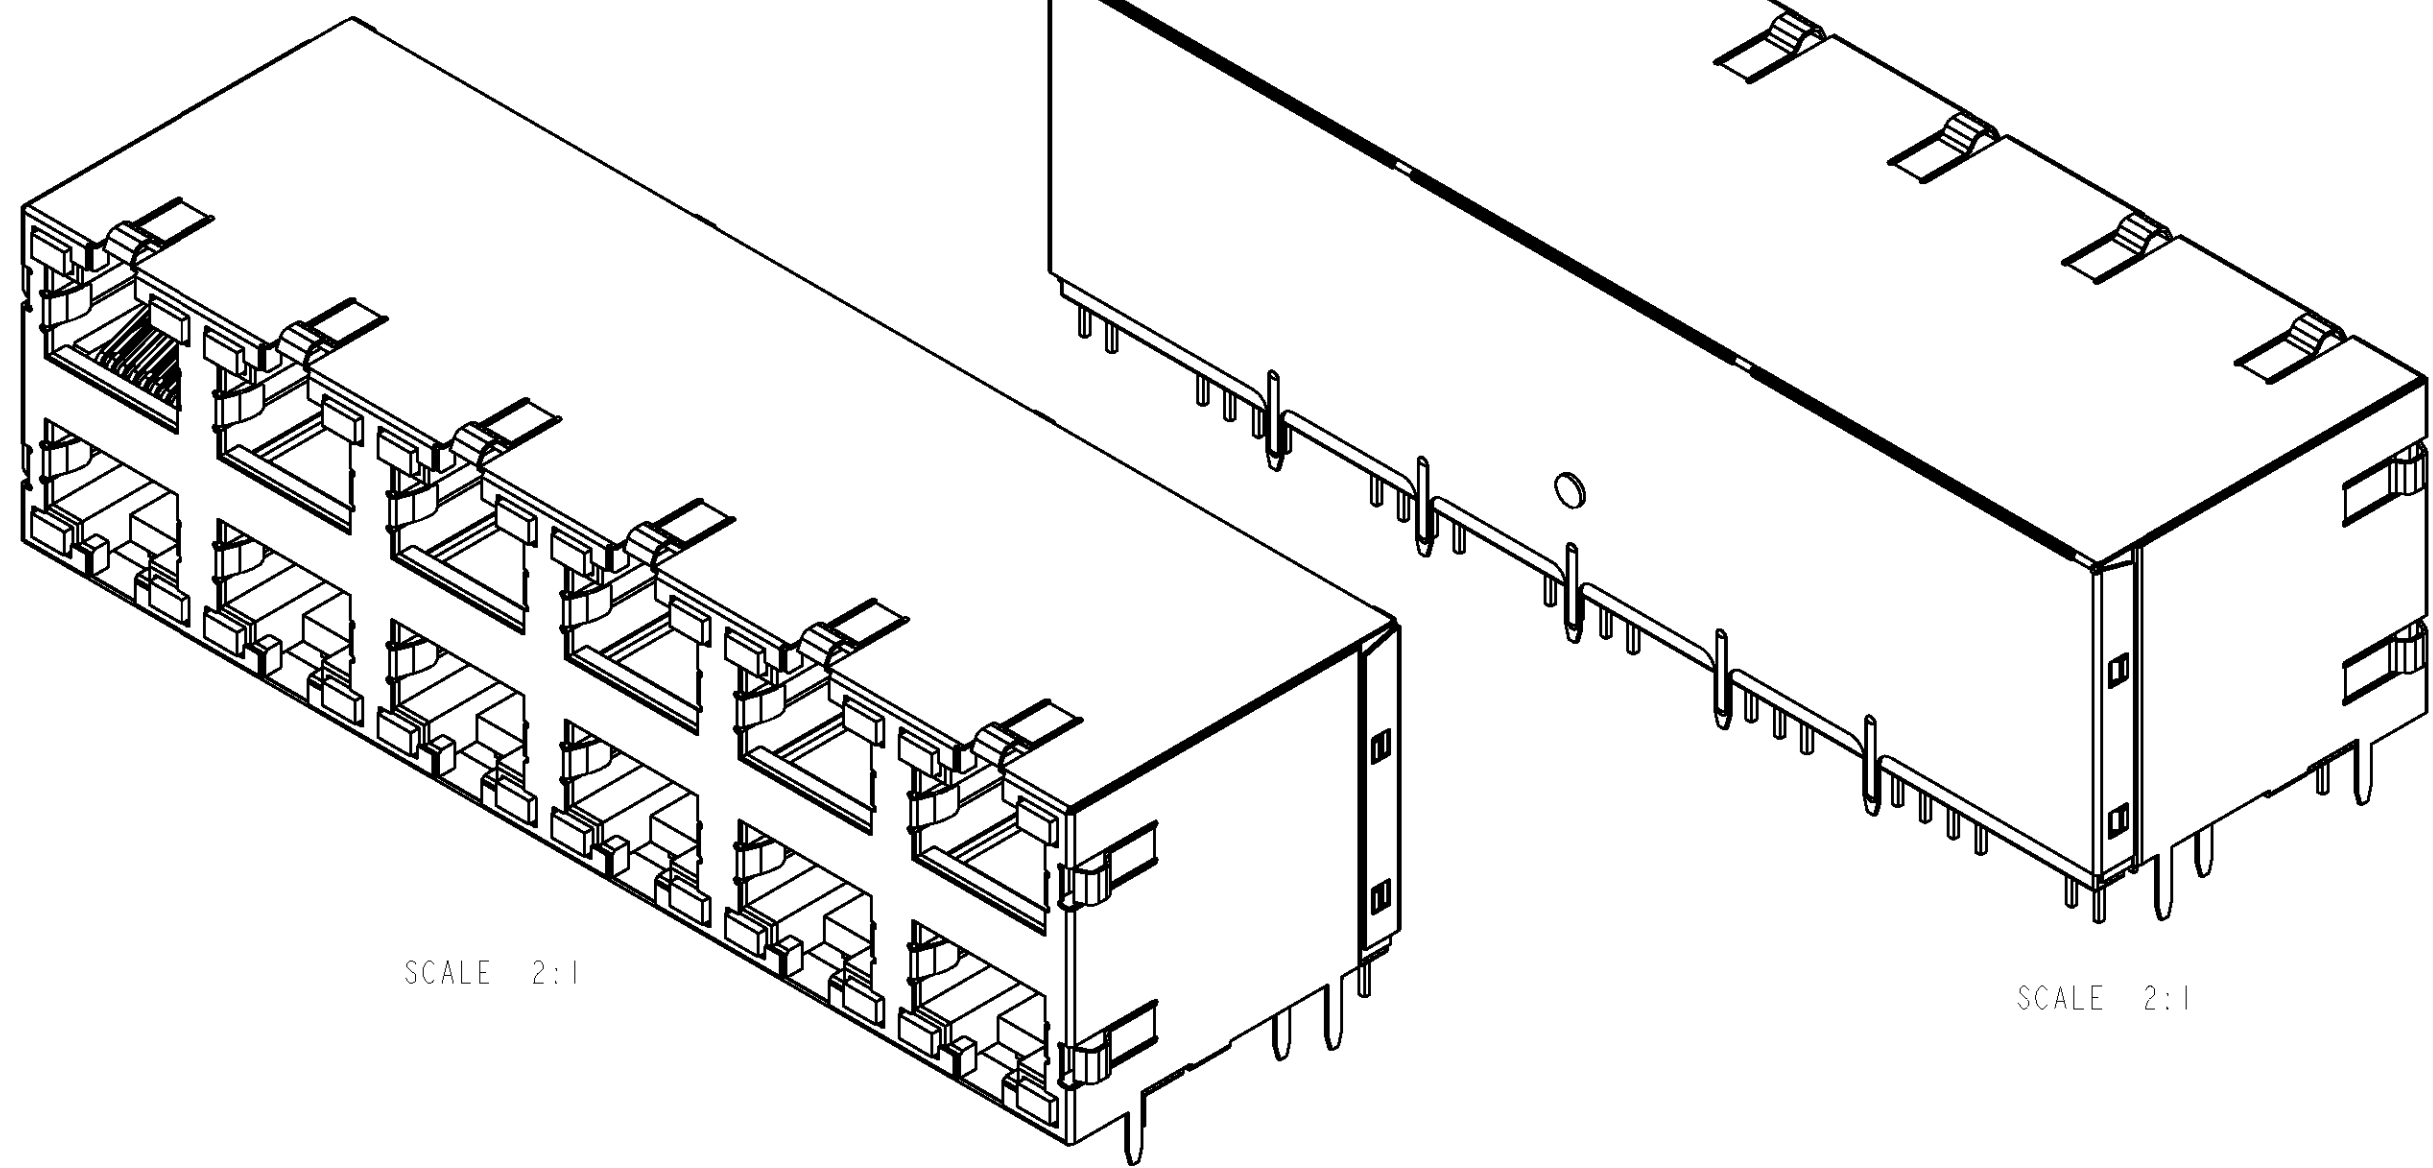
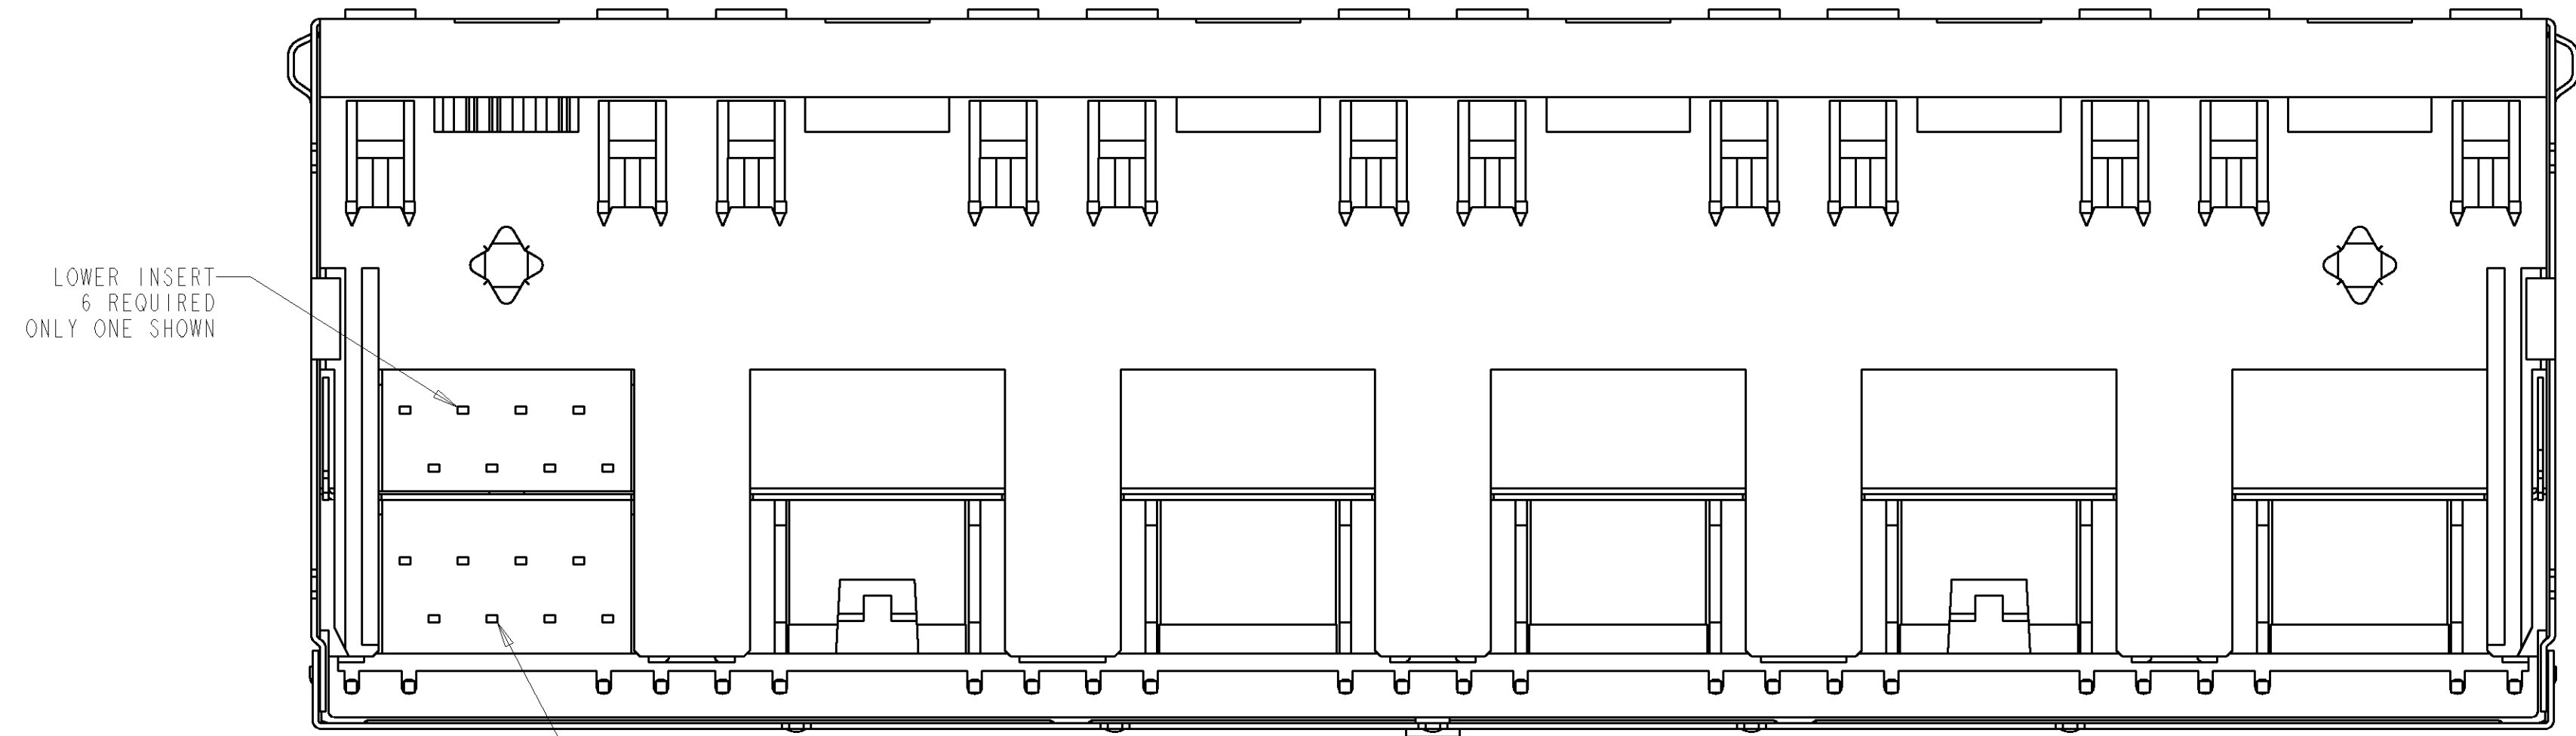
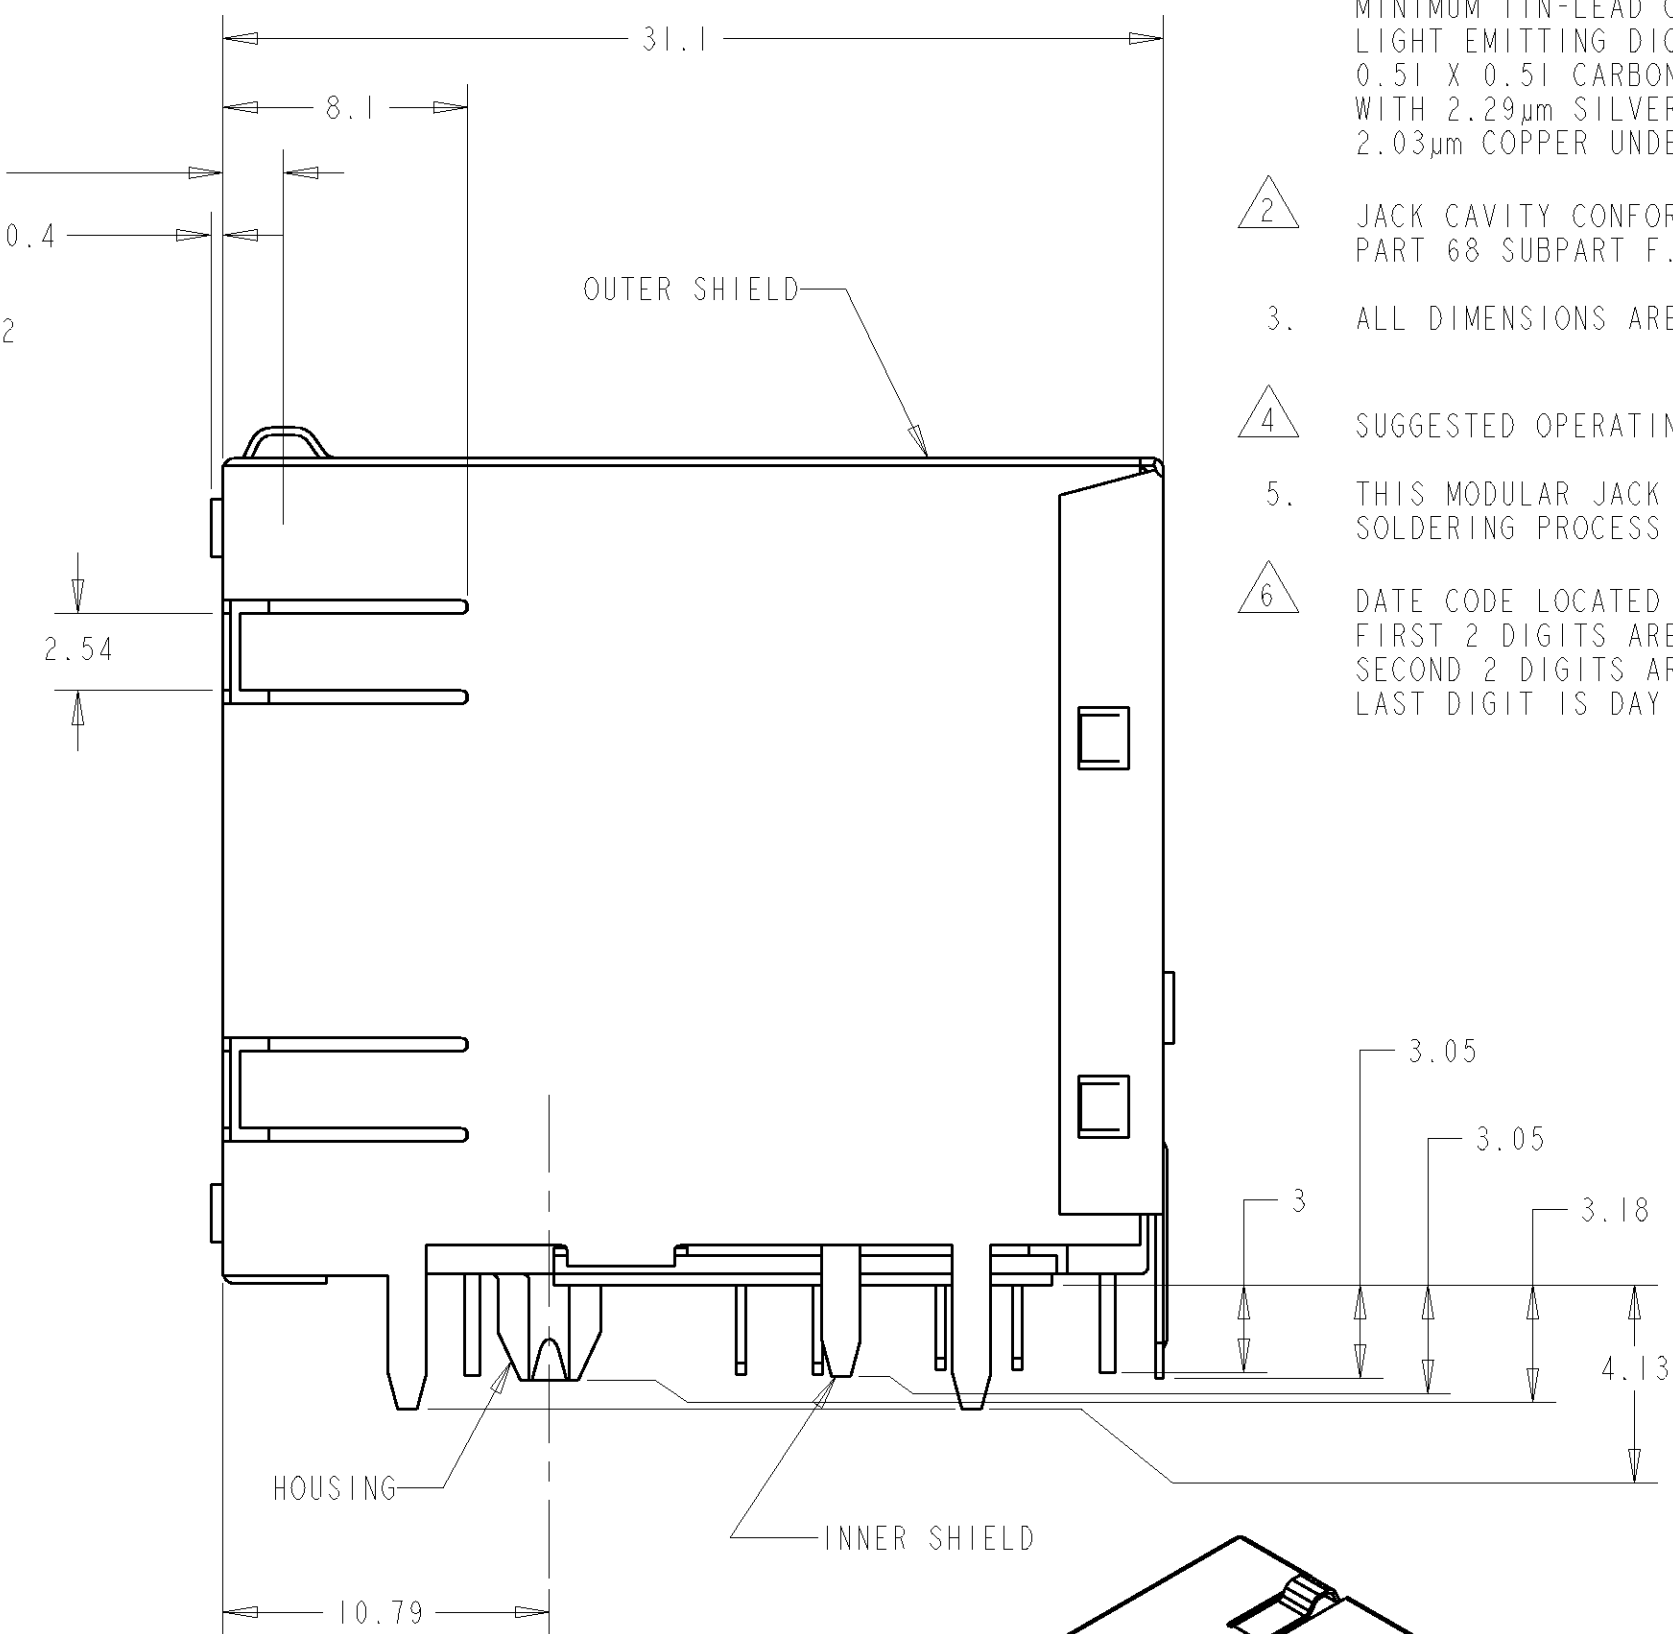


LOC		DIST		REVISIONS					
AA		22		F	LTW	DESCRIPTION	DATE	DWN	APVD
					C	ADDED: -13 PER EC 0S11-0023-03	23APR2003	DD	BK
					D	REV PER EC 0S11-0188-03	29MAR2004	EB	BK


- 1
- MATERIAL: HOUSING - PBT POLYESTER, BLACK, UL 94V-0. TERMINALS - 0.33 THICK PHOS BRONZE PLATED WITH 1.27µm MINIMUM THICK HARD GOLD IN LOCALIZED AREA AND 3.81µm MINIMUM THICK TIN-LEAD IN SOLDER AREA OVER 1.27µm MINIMUM THICK NICKEL UNDERPLATE. SHIELD - 0.25 THICK COPPER ALLOY PLATED WITH 2.03µm MINIMUM TIN-LEAD OVER 2.54µm MINIMUM COPPER. LIGHT EMITTING DIODE (LED) - DIFFUSED EPOXY LENS, 0.51 X 0.51 CARBON STEEL WIREFRAME LEADS PREPLATED WITH 2.29µm SILVER OVER 1.02µm NICKEL UNDERPLATE OVER 2.03µm COPPER UNDERPLATE.
- 2
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
3.
- ALL DIMENSIONS ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
- 4
- SUGGESTED OPERATING CURRENT FOR THE LED IS 20 mA.
5.
- THIS MODULAR JACK WITH INTEGRATED LED IS NOT IR REFLOW SOLDERING PROCESS COMPATIBLE.
- 6
- DATE CODE LOCATED ON REAR OF PART APPROX AS SHOWN: FIRST 2 DIGITS ARE LAST 2 DIGITS OF YEAR, SECOND 2 DIGITS ARE MANUFACTURING WORK WEEK, LAST DIGIT IS DAY OF WEEK, WITH SUNDAY=1.

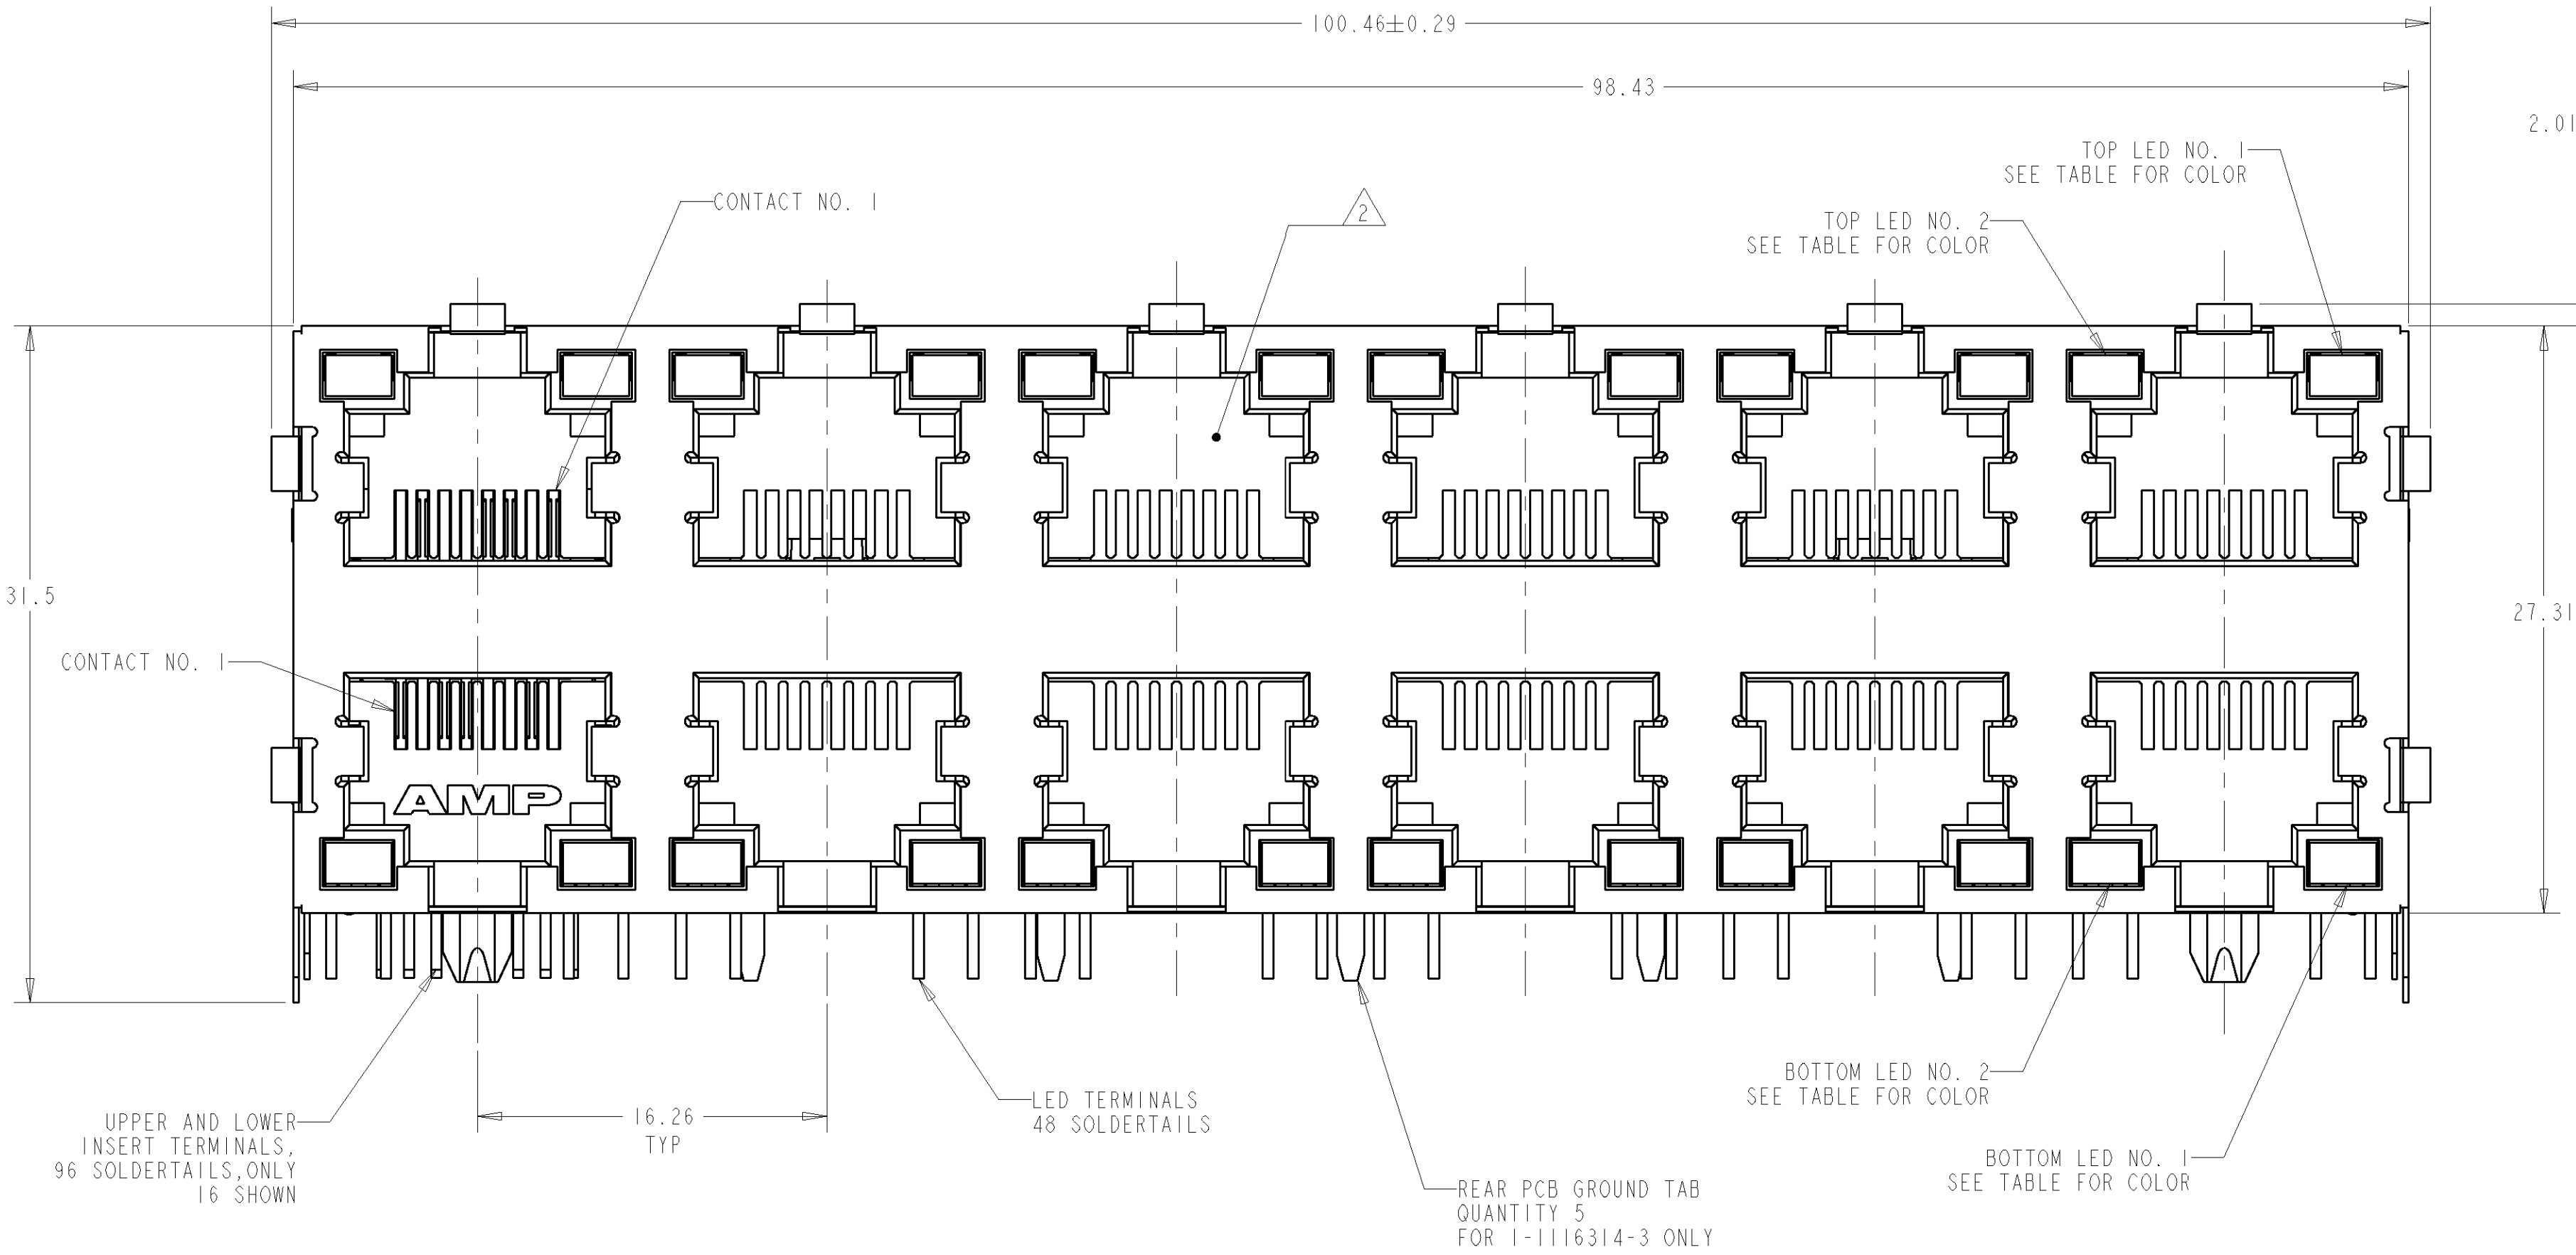


GREEN	YELLOW	GREEN	YELLOW	1-1116314-3
GREEN/ORANGE	GREEN/ORANGE	GREEN/ORANGE	GREEN/ORANGE	1116314-4
GREEN	YELLOW	GREEN	YELLOW	1116314-3
YELLOW	GREEN	GREEN	YELLOW	1116314-2
GREEN	GREEN	GREEN	GREEN	1116314-1
BOTTOM LED NO.2	BOTTOM LED NO.1	TOP LED NO.2	TOP LED NO.1	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. ANY CHANGES MUST BE APPROVED BY THE CONTROLLING ENGINEERING ORGANIZATION. NO CHANGES SHOULD BE MADE WITHOUT THE LATEST REVISION.		DWN Vic Slack 29-AUG-98	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK Gene Reed 29-AUG-98	NAME ASSEMBLY, STACKED JACK, 2 x 6, 8 POSITION, SHIELDED, PANEL GROUND, LEDS, CATEGORY 5	
TOLERANCES, UNLESS OTHERWISE SPECIFIED: 9 PLC ±0.25 5 PLC ±0.25 5 PLC ±0.25 4 PLC ±0.25 ANGLES ±0.25		APVD Mitch Miller 29-AUG-98	PRODUCT SPEC 108-1163-2	
MATERIAL		APPLICATION SPEC 114-2154	SIZE A1	
FINISH		WEIGHT	CAGE CODE 00779	
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 2	
		REV D		


LOC	DIST	REVISIONS					
AA	22	F	LTR	DESCRIPTION	DATE	DWN	APVD
			D	SEE SHEET 1	-	-	-

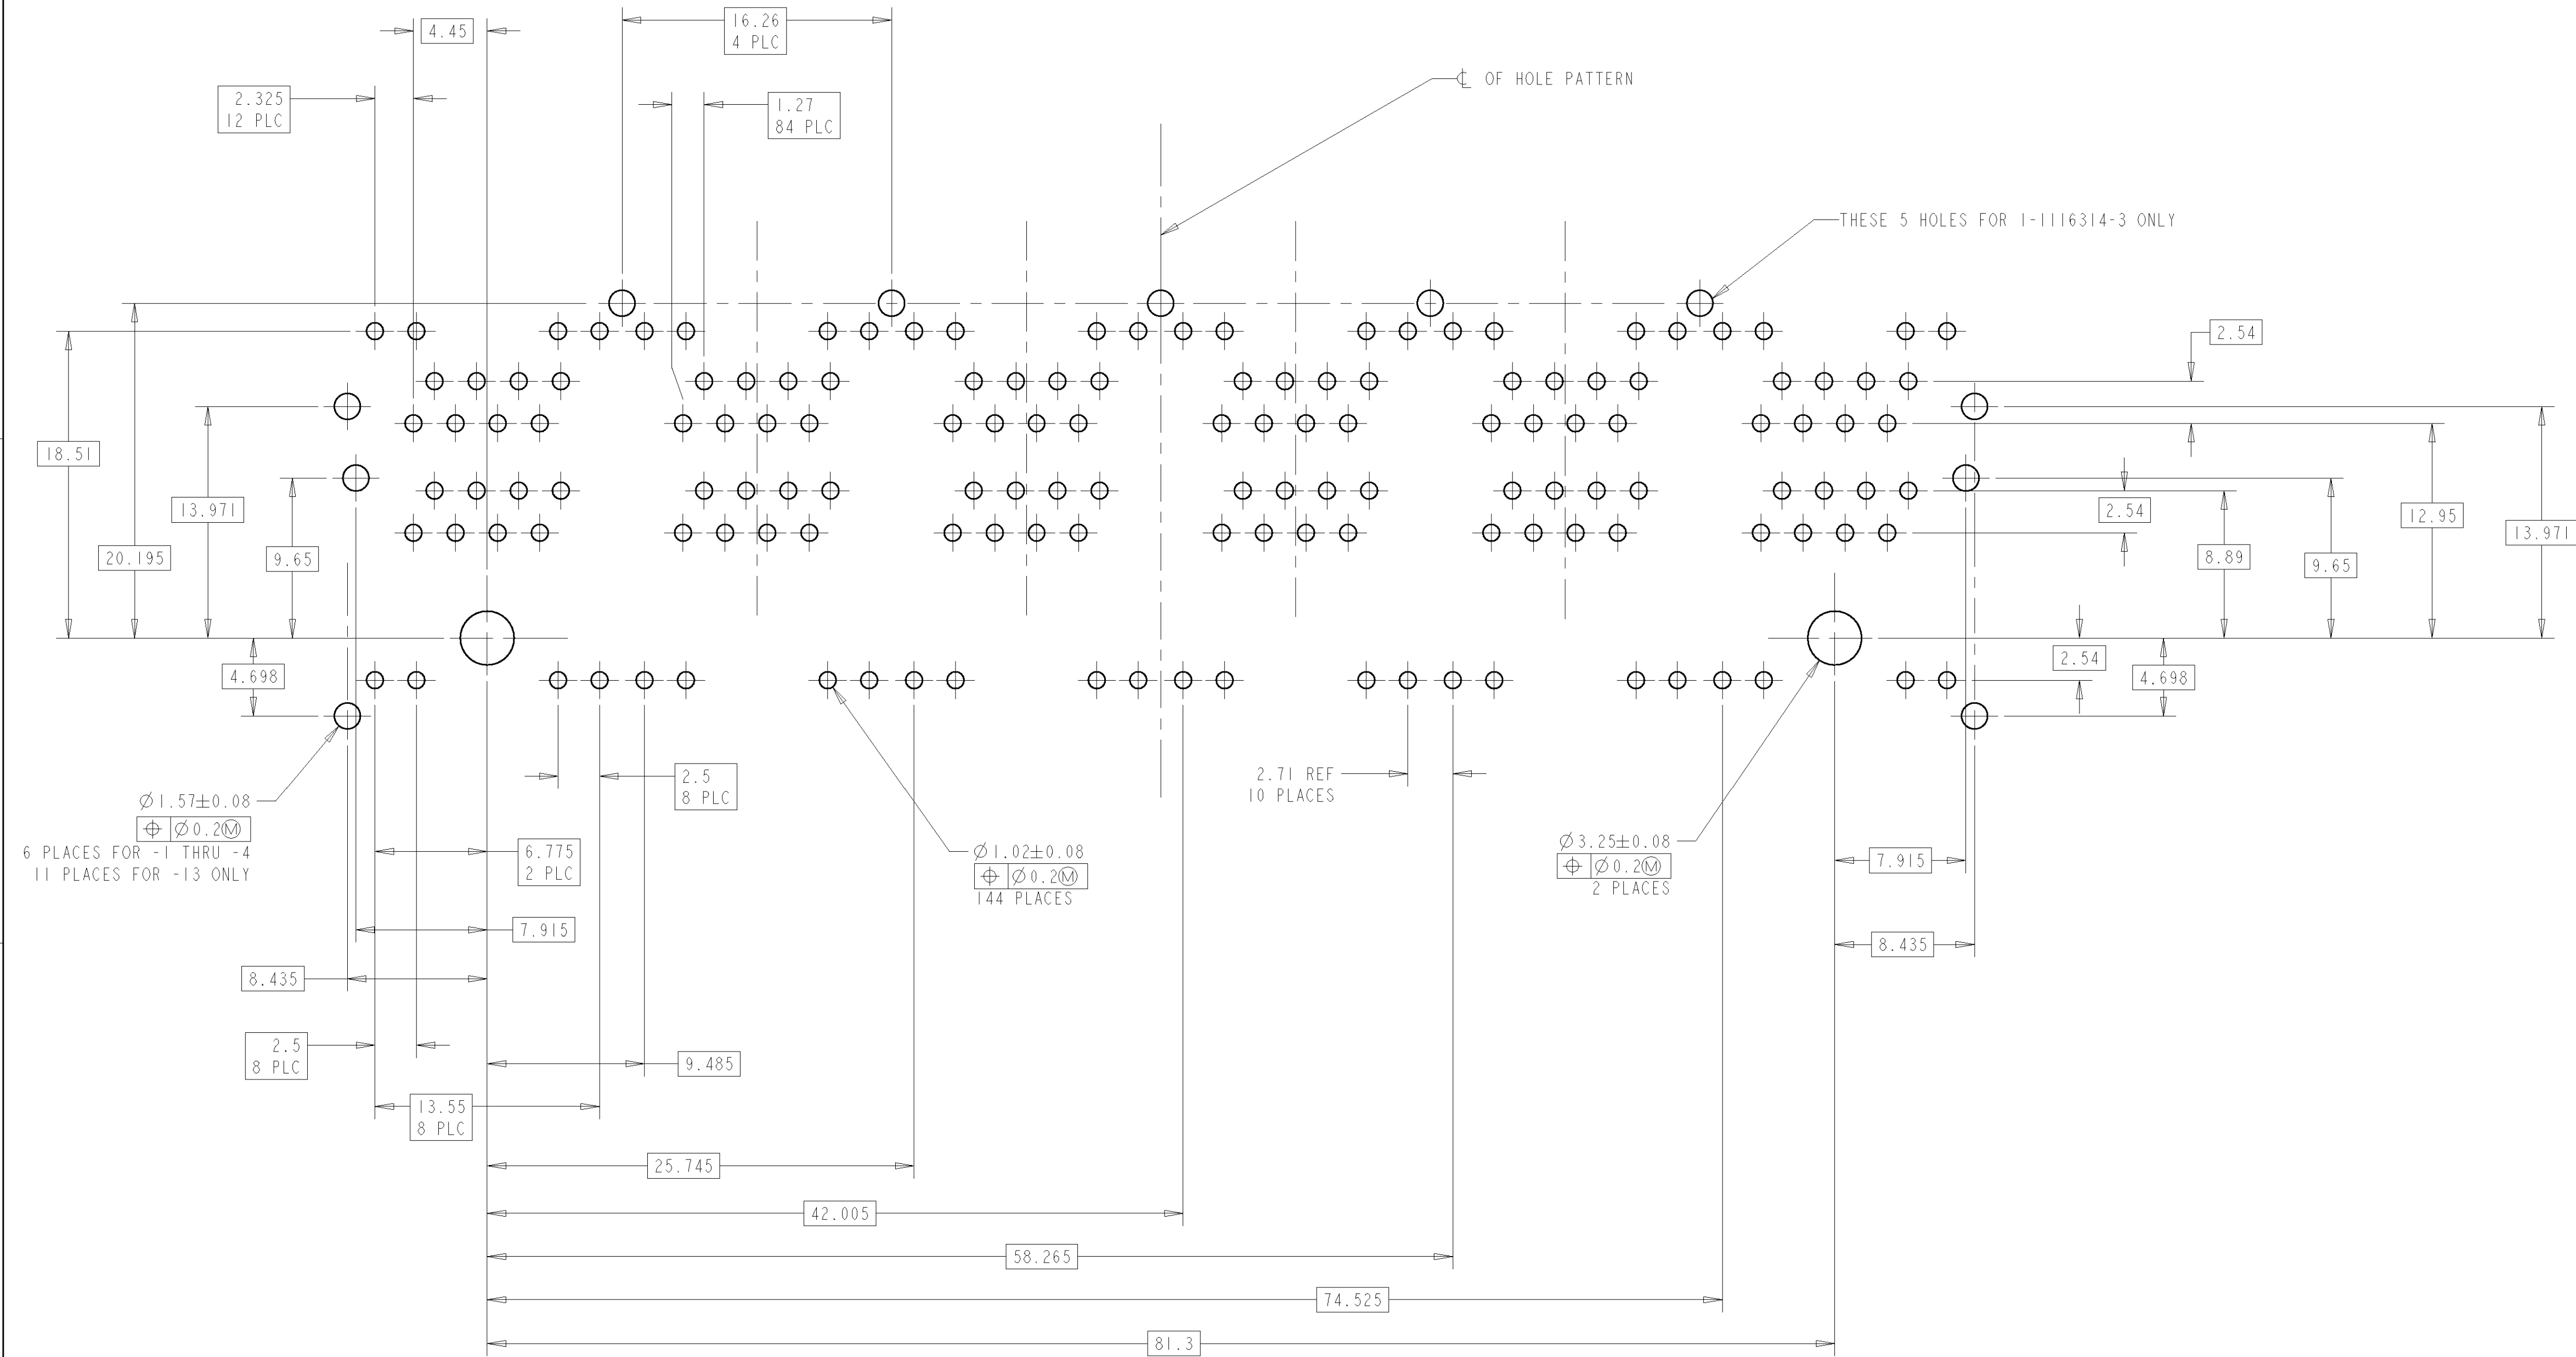


PC BOARD LAYOUT VIEWED FROM COMPONENT SIDE OF BOARD
SCALE 4:1

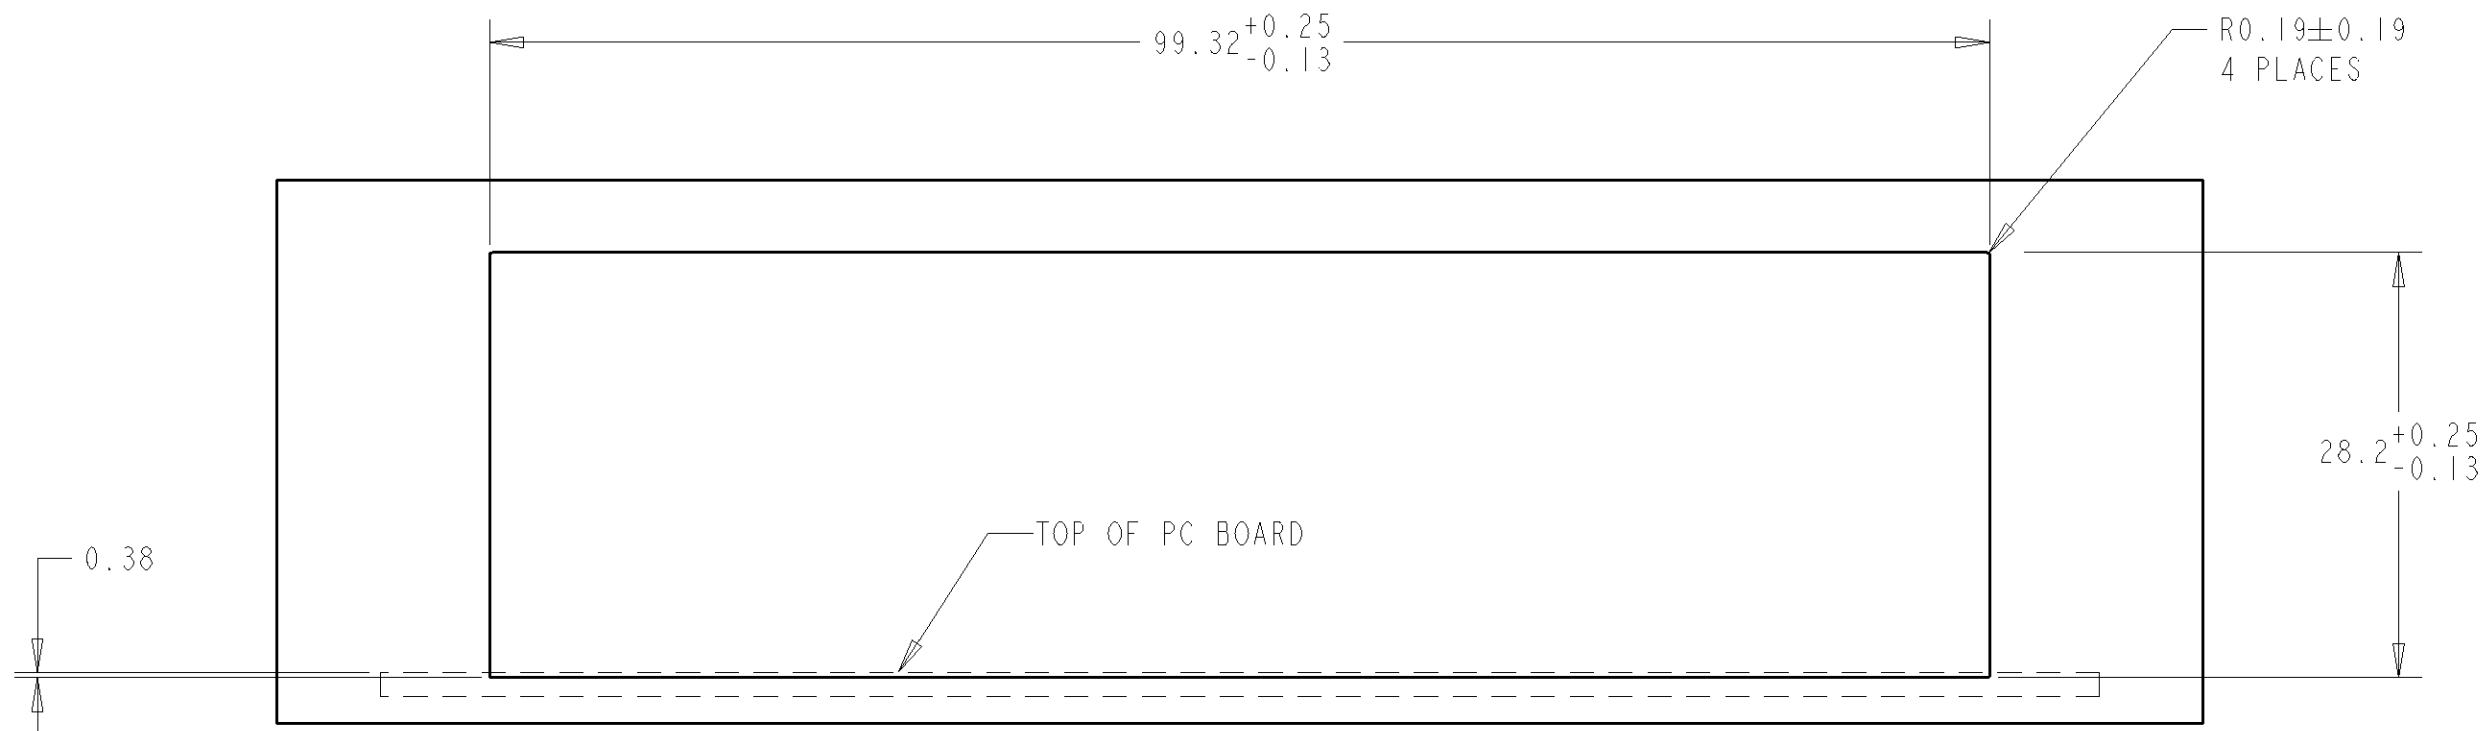

SUGGESTED PANEL CUTOUT DIMENSIONS
SCALE 2:1

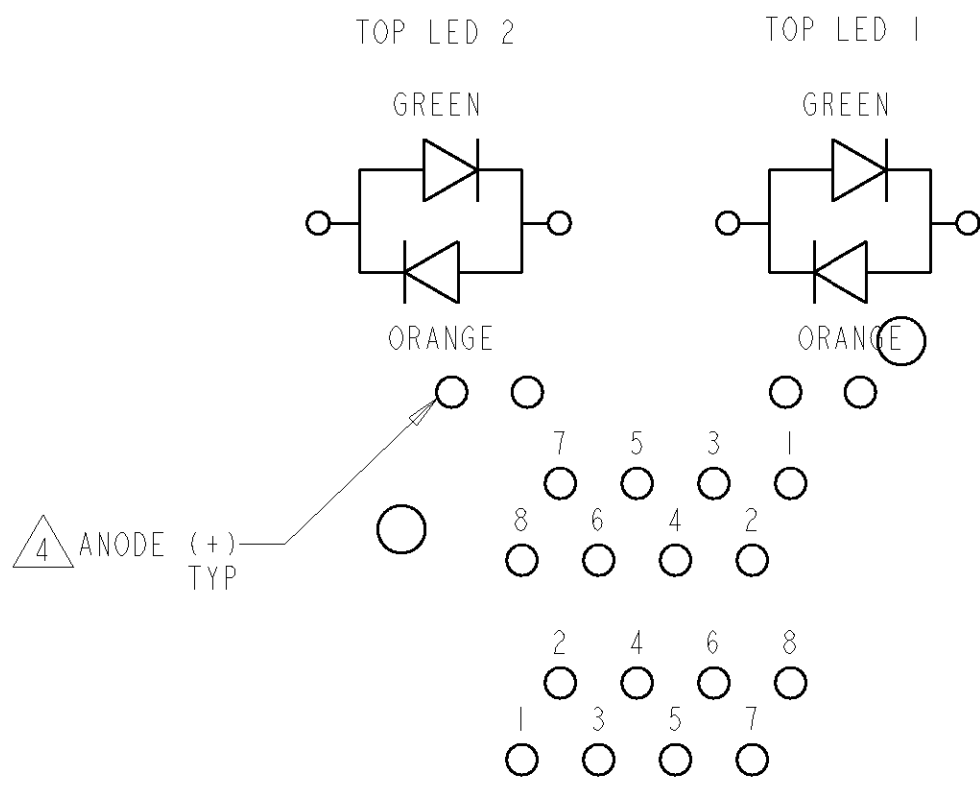

SCHEMATIC FOR 1116314-4 ONLY
SCALE 4:1

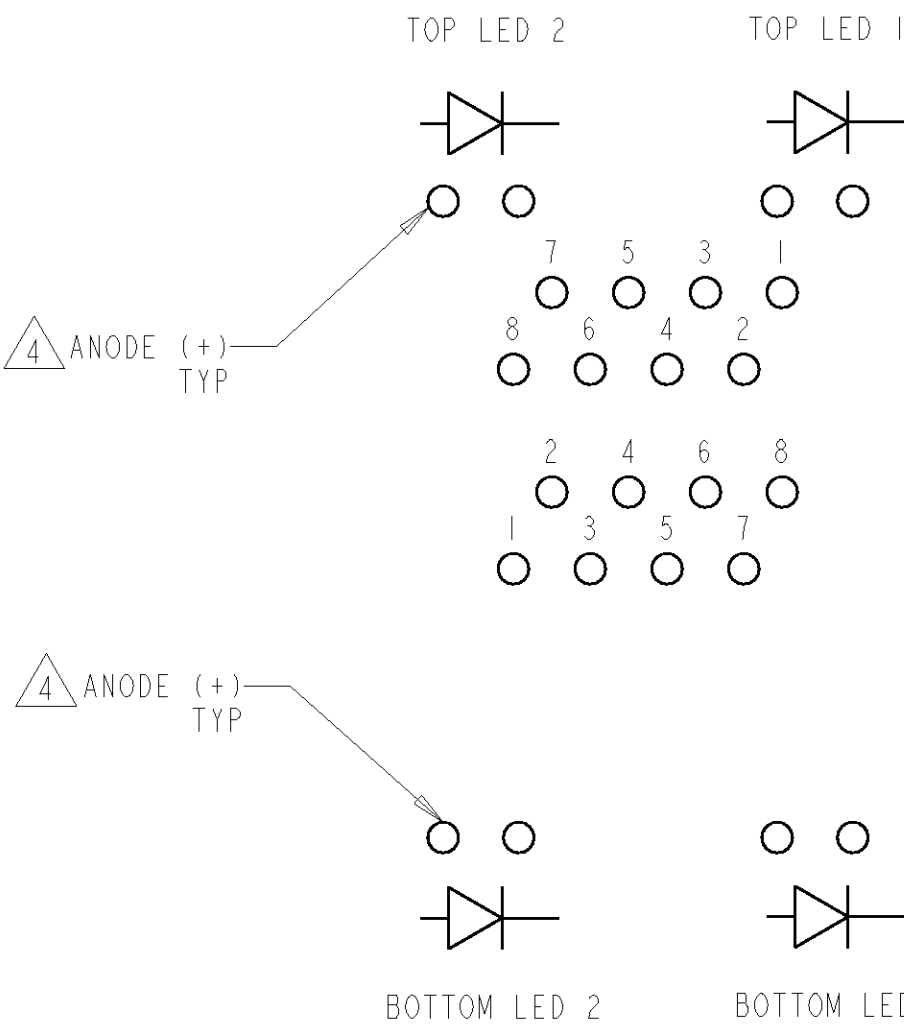

SCHEMATIC FOR 1116314-1, -2, -3 & -13
SCALE 4:1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. ANY DISCREPANCY TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN Vic Slack 29-AUG-98	AMP Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK Gene Reed 29-AUG-98		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ±0.25 1 PLC ±0.25 5 PLC ±0.25 4 PLC ±0.25 ANGLES ±0.25 FINISH -		APVD Mitch Miller 29-AUG-98	NAME ASSEMBLY, STACKED JACK, 2 x 6, 8 POSITION, SHIELDED, PANEL GROUND, LEDS, CATEGORY 5	
MATERIAL -		PRODUCT SPEC -	SIZE A1	
		APPLICATION SPEC -	CAGE CODE 00779	
		WEIGHT -	DRAWING NO 1116314	
		CUSTOMER DRAWING	RESTRICTED TO -	
			SCALE 4:1	
			SHEET 2 OF 2	
			REV D	