


C 626249/250
880150


DO NOT SCALE
DIMENSIONS IN mm.

METRIC

3rd ANGLE PROJECTION

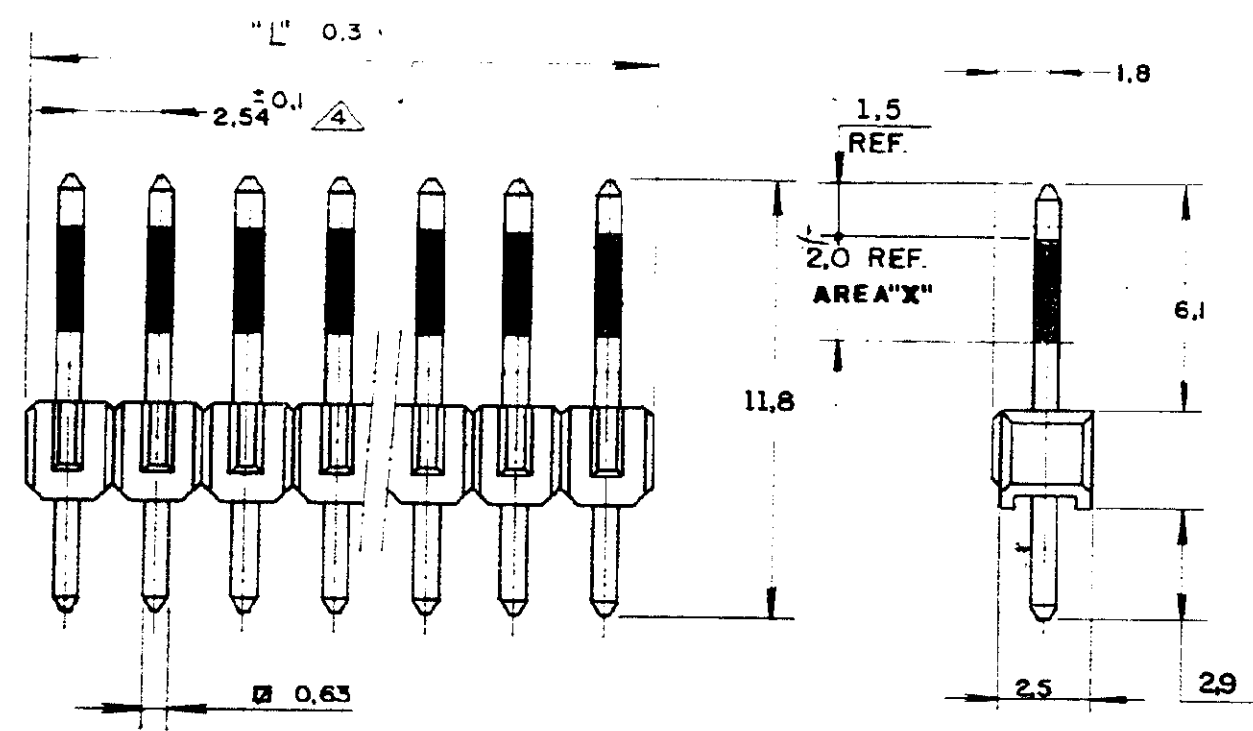

FURAÇÃO RECOMENDADA P/ PLACA DE C.I.
P.C. BOARD MOUNTING AND HOLE PATTERN

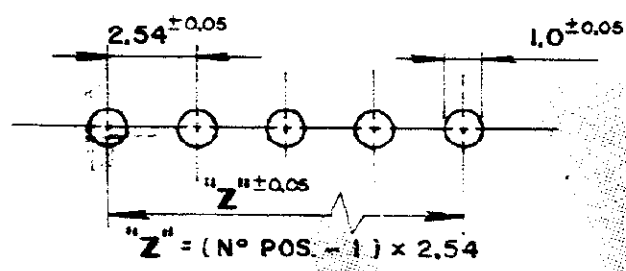

NOTAS:
NOTES:

- 1 CONTATO: LATÃO, C/ 0,38µm MIN. DE Au NA ÁREA "X"; 2,54µm MIN. DE SnPb NA ÁREA DE SOLDA, AMBOS SOBRE BANHO TOTAL DE 1,27µm MIN. DE Ni.
RECEPTÁCULO: TERMOPLÁSTICO C/ F. VIDRO V-O, PRETO.
CONTACT: BRASS, W/ 0,38µm MIN. Au ON "X" AREA, 2,54µm MIN. SnPb ON SOLDER AREA, BOTH OVER TOTAL PLATING 1,27µm MIN. Ni.
HOUSING: TERMOPLÁSTICO W/ GLASS E V-O, BLACK.
- 2 SIMILAR À NOTA 1, EXCETO PELA ÁREA "X" C/ 0,76µm MIN. DE Au.
SIMILAR TO NOTE 1, EXCEPT BY "X" AREA W/ 0,76µm MIN. Au.
- 3 CONTATO: LATÃO, C/ 2,54µm MIN. DE Sn, SOBRE 1,27µm MIN. DE Ni EM TODO CONTATO.
RECEPTÁCULO: TERMOPLÁSTICO C/ F. VIDRO V-O, PRETO.
CONTACT: BRASS, W/ 2,54µm MIN. Sn, OVER TOTAL PLATING 1,27µm MIN. Ni.
HOUSING: TERMOPLÁSTICO W/ GLASS F. V-O, BLACK.
- 4 TOLERANCIA NÃO CUMULATIVA.
TOLERANCE NON-CUMULATIVE.
- 5 OS TRACOS INDICADOS POR ESTA NOTA, NÃO SÃO INATIVOS.
THE DASHES INDICATED BY THIS NOTE, ARE NOT INACTIVES.

INATIVO
INACTIVE

127,00	50	5-	-0	5-	-0	5-	-0
124,46	49	4-	-9	4-	-9	4-	-9
121,92	48	4-	-8	4-	-8	4-	-8
119,38	47	4-	-7	4-	-7	4-	-7
116,84	46	4-	-6	4-	-6	4-	-6
114,30	45	4-	-5	4-	-5	4-	-5
111,76	44	4-	-4	4-	-4	4-	-4
109,22	43	4-	-3	4-	-3	4-	-3
106,68	42	4-	-2	4-	-2	4-	-2
104,14	41	4-	-1	4-	-1	4-	-1
101,60	40	4-	-0	4-	-0	4-	-0
99,06	39	3-	-9	3-	-9	3-	-9
96,52	38	3-	-8	3-	-8	3-	-8
93,98	37	3-	-7	3-	-7	3-	-7
91,44	36	3-	-6	3-	-6	3-	-6
88,90	35	3-	-5	3-	-5	3-	-5
86,36	34	3-	-4	3-	-4	3-	-4
83,82	33	3-	-3	3-	-3	3-	-3
81,28	32	3-	-2	3-	-2	3-	-2
78,74	31	3-	-1	3-	-1	3-	-1
76,20	30	3-	-0	3-	-0	3-	-0
73,66	29	2-	-9	2-	-9	2-	-9
71,12	28	2-	-8	2-	-8	2-	-8
68,58	27	2-	-7	2-	-7	2-	-7
66,04	26	2-	-6	2-	-6	2-	-6
63,50	25	2-	-5	2-	-5	2-	-5
60,96	24	2-	-4	2-	-4	2-	-4
58,42	23	2-	-3	2-	-3	2-	-3
55,88	22	2-	-2	2-	-2	2-	-2
53,34	21	2-	-1	2-	-1	2-	-1
50,80	20	2-	-0	2-	-0	2-	-0
48,26	19	1-	-9	1-	-9	1-	-9
45,72	18	1-	-8	1-	-8	1-	-8
43,18	17	1-	-7	1-	-7	1-	-7
40,64	16	1-	-6	1-	-6	1-	-6
38,10	15	1-	-5	1-	-5	1-	-5
35,56	14	1-	-4	1-	-4	1-	-4
33,02	13	1-	-3	1-	-3	1-	-3
30,48	12	1-	-2	1-	-2	1-	-2
27,94	11	1-	-1	1-	-1	1-	-1
25,40	10	1-	-0	1-	-0	1-	-0
22,86	9	1-	-9	1-	-9	1-	-9
20,32	8	1-	-8	1-	-8	1-	-8
17,78	7	1-	-7	1-	-7	1-	-7
15,24	6	1-	-6	1-	-6	1-	-6
12,70	5	1-	-5	1-	-5	1-	-5
10,16	4	1-	-4	1-	-4	1-	-4
7,62	3	1-	-3	1-	-3	1-	-3
5,08	2	1-	-2	1-	-2	1-	-2
2,54	1	1-	-1	1-	-1	1-	-1

*L" ± 0,3	Nº DE POSIÇÕES	PART NUMBER	PART NUMBER	PART NUMBER
CUSTOMER DWG FOR REFERENCE ONLY		THIS DRAWING IS UNPUBLISHED RELEASE FOR PUBLICATION		
TOLERANCES UNLESS OTHERWISE STATED		RESERVED AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING		
INS. DIA. RANGE		WIRE RANGE		SCALE
AMP do BRASIL LTDA. São Paulo, Brasil		DESCRIPTION AMP MODU II PIN HEADER SINGLE ROW STRAIGHT (Single Pin)		
DWG NO 626249/250		SHEET 1 OF 1		
880150				

-
- Home

Part Number Search

Document Search

Text Search

Alternate Part Search

Multiple Part Comparison

Alphabetical Search

Brand Search

Industry Product Search

Product Type Search

Product Family Search

Competitor Cross Reference

Lead Free Solutions

Help/Glossary

Current Brand View

AMP

View All Tyco Electronics Brands

Click to activate links to all other products

AMPMODU

.100 & .150 Centerline Through Hole Headers

AMP880150-1ActiveActive

(Tyco Electronics P/N: 880150-1)

Search for Parts |

Previous

123

Next

Document links for this part cannot be displayed. Your browser does not support inline frames or is currently configured not to display inline frames. Inline frames are supported in both Internet Explorer 5 and Netscape 6, as well as all later versions of these browsers.

Related Part Information		
General Information	eCommerce	Related Part Information
General Info Sales Info Assembly Subcontractors	Pricing Product Availability	

Photos & Line Drawings - The photographs and/or line drawings are representative images of a product for viewing purposes only.

Product Photo

Searchable Features:	
Brand:	AMP
Header Type:	Breakaway
No. of Rows:	Single
No. of Positions:	1
Mount Angle:	Vertical
PCB Retention Feature:	Without
Surface Mount Compatible:	No
Contact Mating Area Plating:	Gold (15)
Board Standoff:	Without
Mounting Ears:	Without
Panel Attachment:	No

Other Properties:	
Contact Shape:	Square
Post Size (mm [in]):	0.64 [.025]
Centerline, Matrix (mm [in]):	2.54 [.100]
Contact Material:	Brass
Housing Material:	Thermoplastic
Contact Termination Area Plating:	Tin-Lead over Nickel
Gender:	Header
Housing Flammability Rating:	UL 94V-0

Mating Connector Lock:	Without
High Temperature Housing:	No
High Speed Serial Data Connector:	No
Termination Post Length (mm [in]):	2.90 [0.114]

Comment:

Headers may be broken to desired number of positions using Hand Tool No. 91406-1, or Tool Kit No. 314818-1. Other tail lengths are available, consult AMP Incorporated.

[Copyright](#) and [Privacy Statement](#)

Visit [Tyco International, Ltd.](#)

[Products](#) | [Catalog](#) | [Brands](#) | [Industries](#) | [Commerce](#) | [Supplier](#) | [Customer Service](#) | [About](#) | [Home](#)

-
- Home

Part Number Search

Document Search

Text Search

Alternate Part Search

Multiple Part Comparison

Alphabetical Search

Brand Search

Industry Product Search

Product Type Search

Product Family Search

Competitor Cross Reference

Lead Free Solutions

Help/Glossary

Current Brand View

AMP

View All Tyco Electronics Brands

Click to activate links to all other products

AMPMODU

.100 & .150 Centerline Through Hole Headers

AMP880150-3ActiveActive

(Tyco Electronics P/N: 880150-3)

Search for Parts | Previous [1] 2 Next

Document links for this part cannot be displayed. Your browser does not support inline frames or is currently configured not to display inline frames. Inline frames are supported in both Internet Explorer 5 and Netscape 6, as well as all later versions of these browsers.

Related Part Information		
General Information	eCommerce	Related Part Information
General Info Sales Info Assembly Subcontractors	Pricing Product Availability	

Photos & Line Drawings - The photographs and/or line drawings are representative images of a product for viewing purposes only.

Product Photo

Searchable Features:	
Brand:	AMP
Header Type:	Breakaway
No. of Rows:	Single
No. of Positions:	3
Mount Angle:	Vertical
PCB Retention Feature:	Without
Surface Mount Compatible:	No
Contact Mating Area Plating:	Gold (15)
Board Standoff:	Without
Mounting Ears:	Without
Panel Attachment:	No

Other Properties:	
Contact Shape:	Square
Post Size (mm [in]):	0.64 [.025]
Centerline, Matrix (mm [in]):	2.54 [.100]
Contact Material:	Brass
Housing Material:	Thermoplastic
Contact Termination Area Plating:	Tin-Lead over Nickel
Gender:	Header
Housing Flammability Rating:	UL 94V-0

Mating Connector Lock:	Without
High Temperature Housing:	No
High Speed Serial Data Connector:	No
Termination Post Length (mm [in]):	2.90 [0.114]

Comment:

Headers may be broken to desired number of positions using Hand Tool No. 91406-1, or Tool Kit No. 314818-1. Other tail lengths are available, consult AMP Incorporated.

[Copyright](#) and [Privacy Statement](#)

Visit [Tyco International, Ltd.](#)

[Products](#) | [Catalog](#) | [Brands](#) | [Industries](#) | [Commerce](#) | [Supplier](#) | [Customer Service](#) | [About](#) | [Home](#)