


SAW Bandpass Filter 220403B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

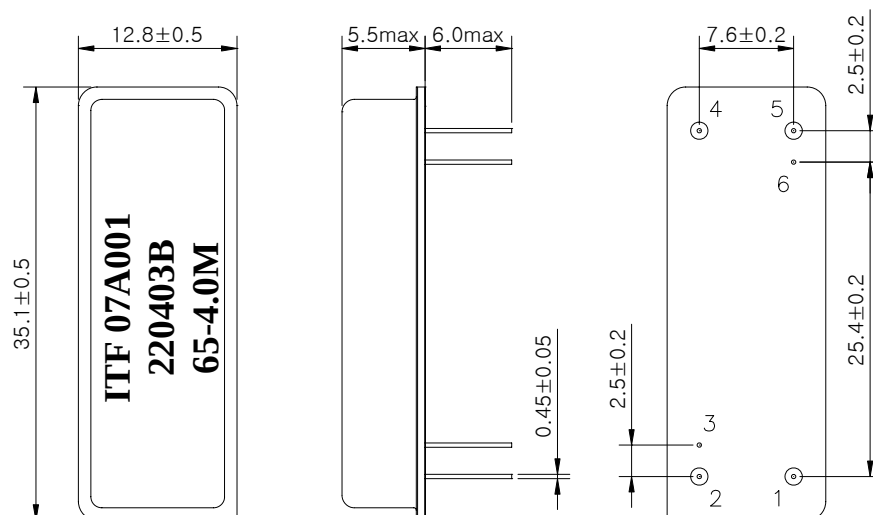

Package : D3512

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	220403B
		Rev. Date	2007-04-19
	Rev.	NM7016-CS01	1/5

SAW Bandpass Filter 220403B



3. Specifications

Fo = 65.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	65.0	-
Insertion Loss	dB	-	24.5	25.5
1dB Bandwidth	MHz	-	4.05	-
3dB Bandwidth	MHz	4.2	4.28	-
40dB Bandwidth	MHz	-	5.18	5.25
Amplitude Ripple (fo±1.92 MHz)	dB	-	0.4	1.0
Group Delay Variation (fo±1.92 MHz)	nsec	-	100	150
Absolute Delay	usec	-	4.42	-
Ultimate Rejection	dB	50	55	-
Temperature Coefficient of Frequency	ppm/°C	-	-18	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	220403B	
		Rev. Date	2007-04-19	
		Rev.	NM7016-CS01	2/5

SAW Bandpass Filter 220403B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

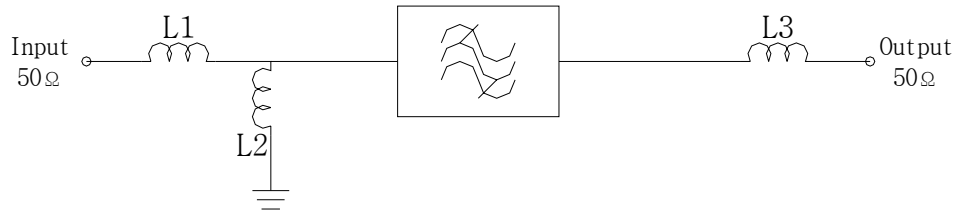

L1=150H, L2=220nH, L3=220nH,

5. Marking Configuration

ITF¹⁾ 07A001²⁾

220403B³⁾

65⁴⁾ -4.0M⁵⁾

1) Manufacturer name

2) Lot Number

3) Part Number

4) Center Frequency



5) 1dB-Bandwidth

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	220403B	
		Rev. Date	2007-04-19	
		Rev.	NM7016-CS01	3/5

SAW Bandpass Filter 220403B



6. Typical Performance (at +25°C)

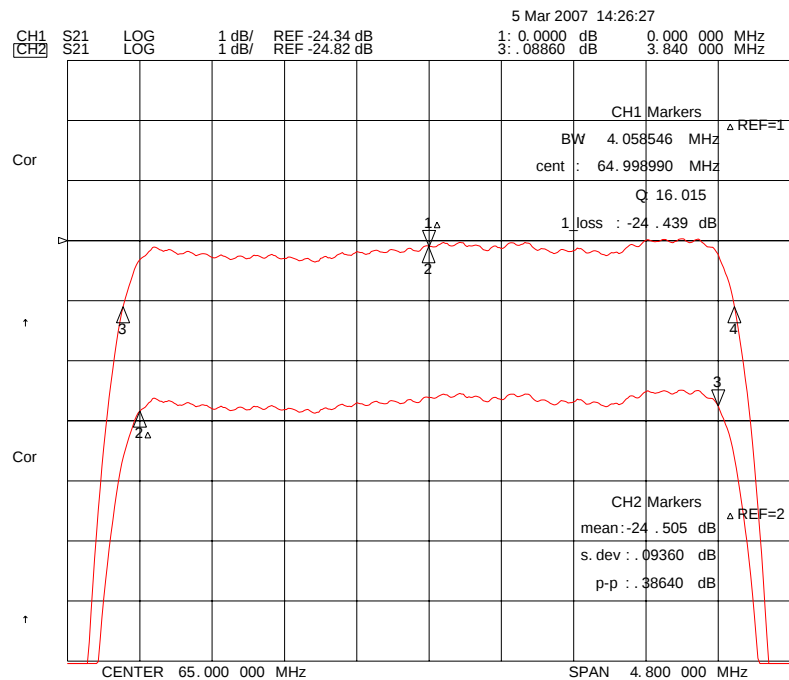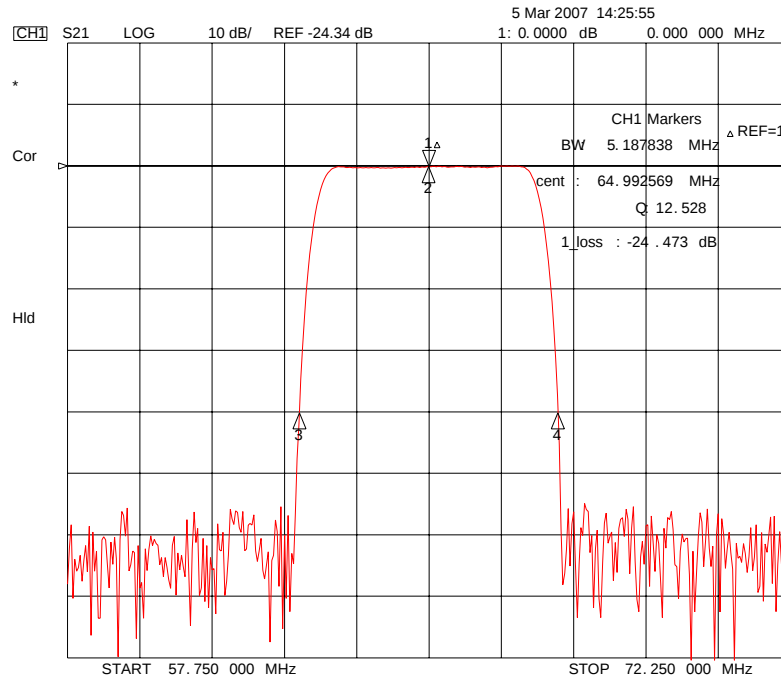

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.

220403B

Rev. Date





2007-04-19

Rev.

NM7016-CS01

4/5

SAW Bandpass Filter 220403B

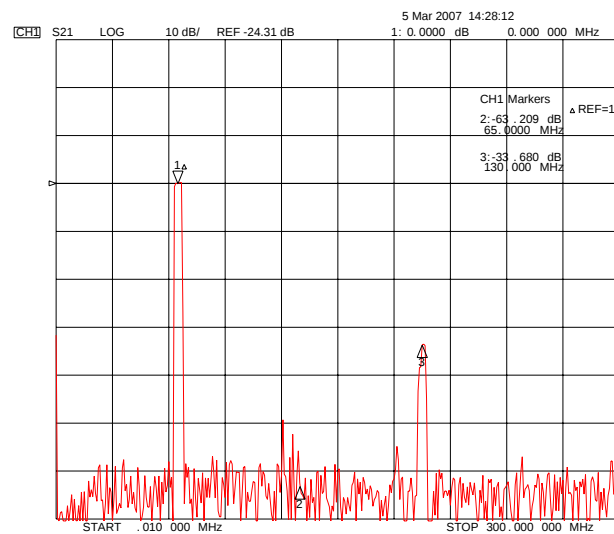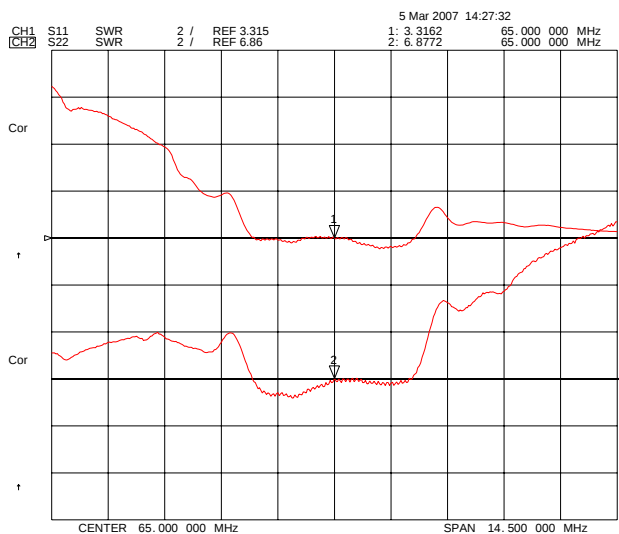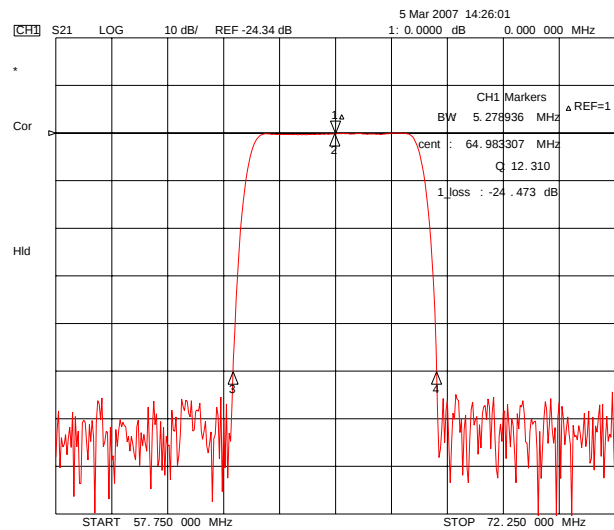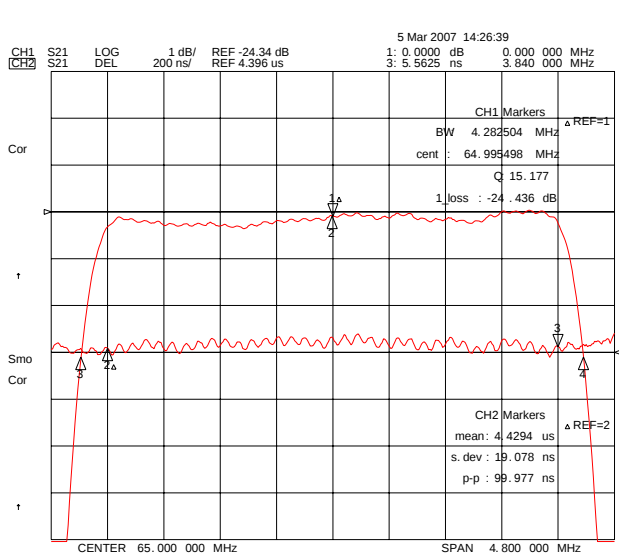

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.

220403B

Rev. Date

2007-04-19

Rev.

NM7016-CS01

5/5