

Rechargeable lithium-ion battery

MP 144350

High performance
Medium Prismatic cell

Saft always supplies MP cells in assemblies or as customized battery system constructions



Benefits

- Extended autonomy and life for mobile systems
- A broad operating temperature range
- Recommended for ruggedized designs
- Easy integration into compact and light systems
- Very high energy density (344 Wh/l and 143 Wh/kg)
- Unrivalled low temperature performance

Key features

- Excellent charge recovery after long storage, even at high temperature
- Maintenance-free
- Long cycle life (over 80 % initial capacity after 500 cycles at 100 % DoD)
- Non-restricted for transport/ Non-assigned to Class 9 according to the UN Recommendations on the transport of dangerous goods - Model Regulations
- Underwriters Laboratories (UL) Component Recognition (File Number MH 12609)

Main applications

- Mobile asset tracking
- Small UPS
- Soldier of the future equipment
- Portable radios
- Professional portable lighting
- Bar code readers
- Portable payment terminal

Electrical characteristics

Nominal voltage (0.5 A rate at 20°C)	3.75 V
Typical capacity (at 0.5 A 20°C 2.5 V cut-off)	2.6 Ah
Nominal energy	9.75 Wh

Mechanical characteristics (Sleeved 100 % charged cell)

Thickness (Thickness tends to increase with cycling, typically obtained after 500 cycles. Consult Saft) (At beginning of life 14.6 mm)	14.9 mm
Width (max)	43.9 mm
Height (max)	54.5 mm
Typical weight	68 g
Lithium equivalent content	0.78 g
Volume	28 cm ³

Operating conditions

Charge method	Constant Current/Constant Voltage
Charge voltage	4.20 +/- 0.05 V
Maximum recommended charge current**	2.6 A (C rate)
Charge temperature range*	-20°C to +60°C
Charge time at 20°C	To be set as a function of the charge current: C rate ➔ 2 to 3 h C/2 rate ➔ 3 to 4 h C/5 rate ➔ 6 to 7 h
Maximum continuous discharge current**	5.0 A (~2C rate)
Pulse discharge current	up to 10 A (~4C rate)
Discharge cut-off voltage	2.5 V
Discharge temperature range*	-50°C to +60°C

* For optimized charging below 0°C, 60°C and discharging at -50°C, consult Saft.

** Electronic protection circuits within battery packs may limit the maximum charge/discharge current allowable. Consult Saft.




MP 144350

Battery assembly

In order to operate properly, individual Li-ion cells are mechanically and electrically integrated in battery assemblies specific to each application. The battery assembly incorporates electronics for performance, thermal and safety management.

Technology

- Graphite-based anode
- Lithium Cobalt oxide-based cathode
- Electrolyte: organic solvents
- Built-in redundant safety protections (*shutdown separator, circuit breaker, safety vent*)
- Batteries assembled from MP cells feature an electronic protection circuit

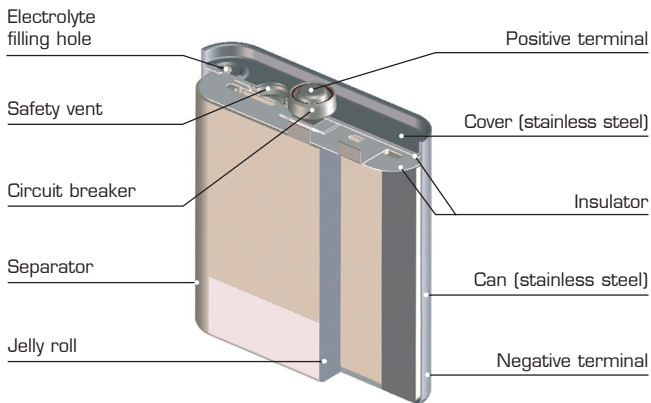

Built-in protection devices ensure safety in case of:

- Exposure to heat
- Exposure to direct sunlight for extended periods of time
- Short circuit
- Overcharge
- Overdischarge

When handling Saft MP batteries:

- Do not solder directly to cell terminal
- Do not disassemble
- Do not remove the protection circuit
- Do not incinerate

Transportation and storage:

- Store in a dry place at a temperature preferably not exceeding 30°C
- For long-term storage, keep the battery within a (30 ± 15) % state of charge

Saft

Specialty Battery Group

12, rue Sadi Carnot
93170 Bagnolet - France
Tel.: +33 (0)1 49 93 19 18
Fax: +33 (0)1 49 93 19 69

313, Crescent Street
Valdese, NC 28690 - USA
Tel.: +1 (828) 874 41 11
Fax: +1 (828) 879 39 81

www.saftbatteries.com

Doc. N° 54044-2-1009

Information in this document is subject to change without notice and becomes contractual only after written confirmation by Saft.


Published by the Communications Department.

Photo credit: Saft.


Société anonyme au capital de 31 944 000€
RCS Bobigny B 383 703 873

Produced by Arthur Associates Limited.


Capacity versus current at + 20°C

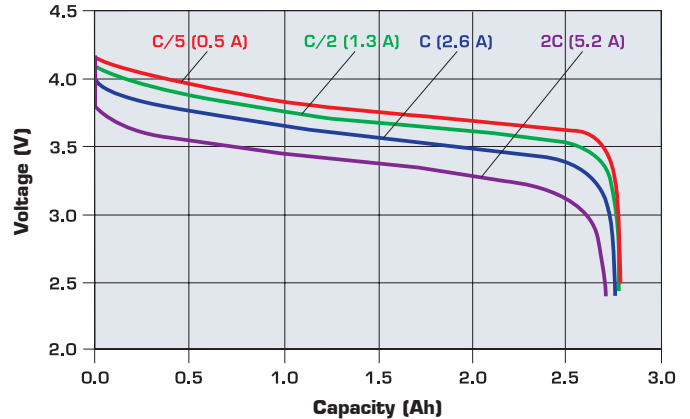

Typical discharge profiles (0.5 A - C/5 rate)

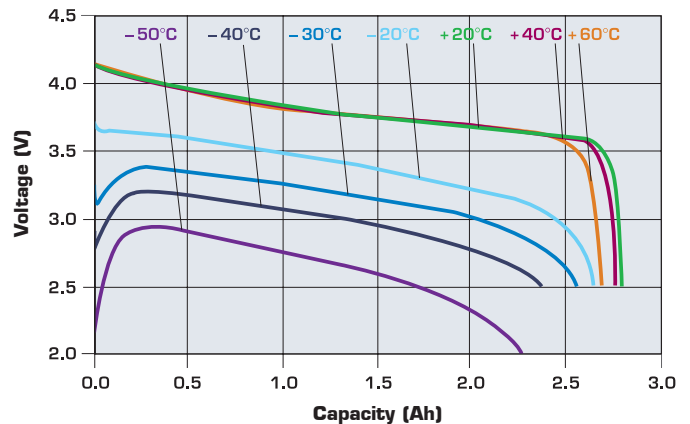

Charge characteristics to 4.2 V at + 20°C

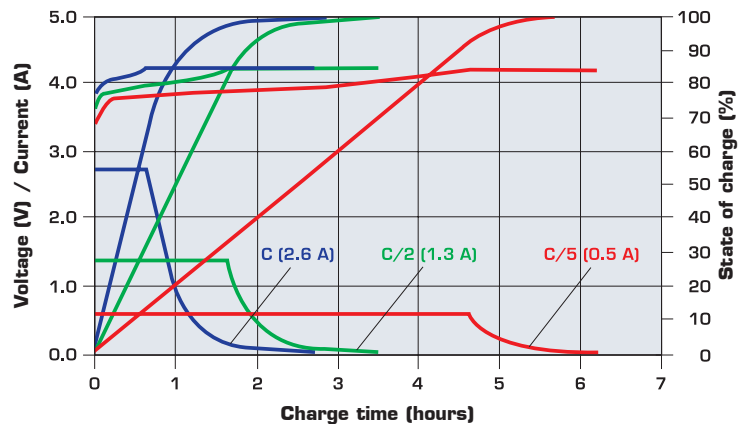

SAFT