




MIL-T-55155 Terminals

ORDER BY PART NO.	"D" ±.002	"Y" ±.003	L NOM.	RECOMMENDATIONS		
				BD THICK	MTG HOLE	SWAGE TOOL
4506 A		.063	.078	.031	+.003	4506
4506 B	.078	.093	.109	.062	.080	
4506 C	DIA.	.093	.140	.094	-.001	
4506 D		.093	.170	.125	DIA.	

MIL-T-55155/29-3, 6, 9, & 12


PART NO. 4506

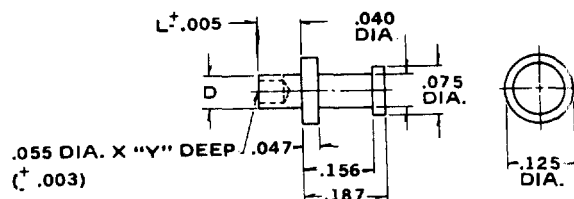

ORDER BY PART NO.	"D" ±.002	L NOM.	RECOMMENDATIONS		
			BD THICK	MTG HOLE	SWAGE TOOL
4507 AA		.035	.015		
4507 A	.047	.051	.032	+.003	4507
4507 B	DIA.	.082	.062	.051	
4507 C		.113	.093	-.001	
4507 D		.145	.125	DIA.	

MIL-T-55155/29-1, 2, 5, 8, & 11


PART NO. 4507

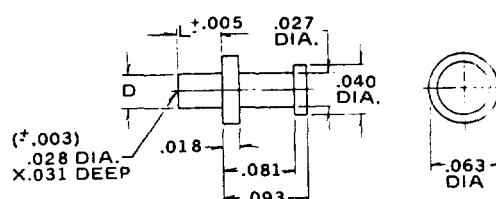

ORDER BY PART NO.	"D" ±.002	L NOM.	RECOMMENDATIONS		
			BD THICK	MTG HOLE	SWAGE TOOL
4508 A		.078	.031		
4508 B		.109	.062	+.003	4508
4508 C	.112	.140	.094	.116	
4508 D	DIA.	.170	.125	-.001	
4508 E		.195	.156	DIA.	
4508 F		.230	.187		
4508 G		.297	.250		

MIL-T-55155/29-4, 7, 10, 13, 14, 15, & 16


PART NO. 4508

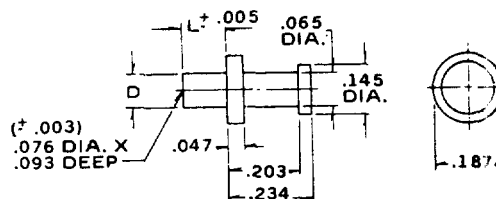

ORDER BY PART NO.	"D" ±.002	"Y" ±.003	L NOM.	RECOMMENDATIONS		
				BD THICK	MTG HOLE	SWAGE TOOL
4509 AA		.037	.025	.015	+.003	4509
4509 A	.062	.053	.045	.032	.066	
4509 B	DIA.	.084	.045	.062	-.001	
4509 C		.115	.045	.094	DIA.	
4509 D		.147	.045	.125		

MIL-T-55155/30-1, 2, 5, 9, & 13


PART NO. 4509

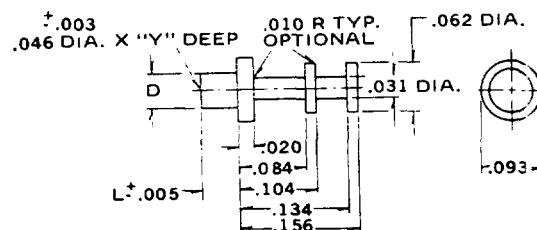

ORDER BY PART NO.	"D" ±.002	L NOM.	RECOMMENDATIONS		
			BD THICK	MTG HOLE	SWAGE TOOL
4510 A		.078	.031		
4510 B	.090	.109	.062	+.003	4510
4510 C	DIA.	.140	.094	.094	
4510 D		.171	.125	-.001	
4510 F		.234	.187	DIA.	
4510 G		.296	.250		

MIL-T-55155/30-3, 6, 10, 14, 17, & 20

PART NO. 4510

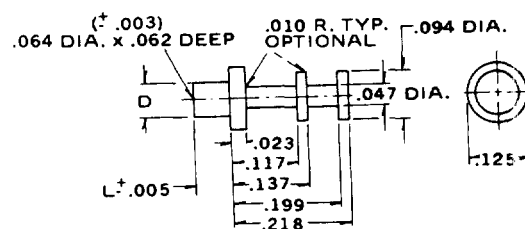

Standard Plating Suffix to Part Number

Terminal

See Page 93 for all plating options.

-4 (Sb over Cu)

TOLERANCE: .xxx ±.005 (ALL DIMS. BEFORE PLATING)