
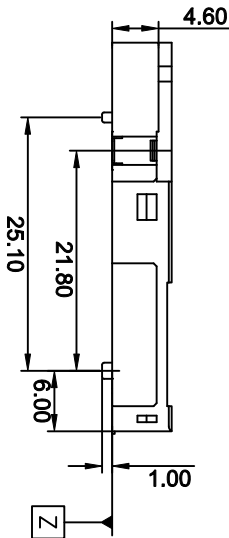
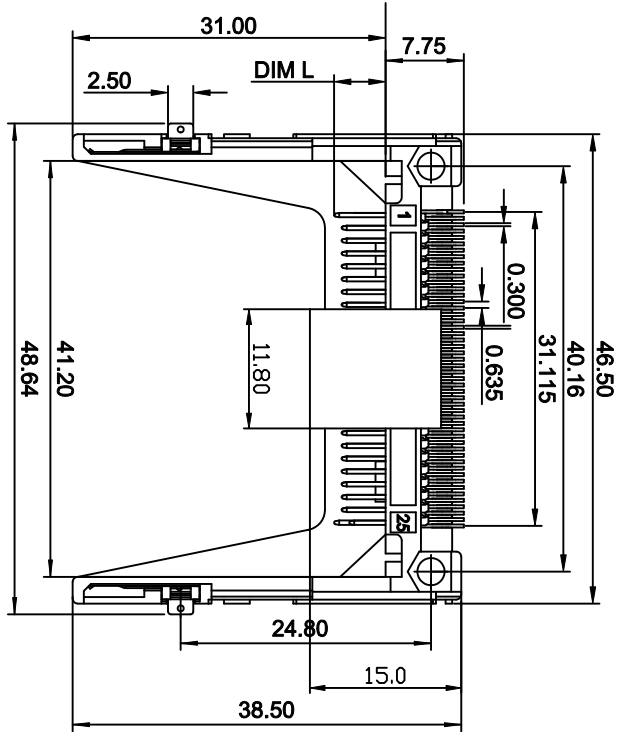


B

A

PIN NUMBER	DIM. L
25,26	3.50
ALL OTHER PINS	4.25
1, 13, 38, 50	5.00

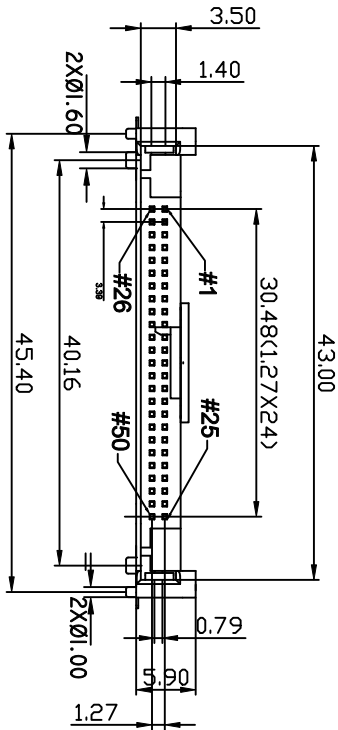

- NOTES :
- MATERIAL :
INSULATOR : HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING: UL94V-0
COLOR: IVORY
CONTACT : COPPER ALLOY
GROUND MOUNTING EAR: COPPER ALLOY
PICK-UP CAP: HIGH TEMP THERMOPLASTIC.
 - PLATING :
CONTACT AREA: SELECTIVE GOLD (SEE P/N DESCRIPTION)
UNDER PLATING: 50µ" NICKEL OVERALL
SOLDER TAIL AREA: 100µ" TIN/LEAD OR 100µ" MATTE TIN
GROUND MOUNT EAR AREA: 100µ" TIN/LEAD OR 100µ" MATTE TIN
 - SOLDER TAILS TO BE WITHIN 0.05 UPWARD
AND 0.2 DOWNWARD FROM Z-DATUM PLACE,
AND COPLANARITY OF SOLDER TAILS TO BE
WITHIN 0.10mm.
 - PRODUCT SPEC: GS-12-240.
 - PACKAGING SPEC: GS-14-980.

mat'l. code	tolerances unless otherwise specified	CUSTOMER COPY	FCI	title	product family	code
ltr	ecm no	dr	dte	lineat	scale	sheet
A	T05-0256	A.C.	11/21/05	.XX ± 0.30	MM	1
B	T06-0047	A.C.	3/07/06	.XXX ± 0.10	MM	2
C	T08-1170	S.LIN	10/12/08	0° ± 2°	MM	3
D	T09-1048	S.LIN	04/09/09	engr ALLEN CHANG	CF	4
		chr	STERLING LIN	2/22/05	10053867	1 of 3
		appr	H.C LIU	2/22/05		
sheet	revision	D	D	D		
Index	sheet	1	2	3		

1 | 2

1 | 2

3 |

4

ACAP

3 |

4

A

PDM: Rev:D

STATUS: Released

Printed: Apr 13, 2009




6.Port Number Description:

P/N: 10053867-XX50XX

- PLATING ON SOLDER TAIL AREA:
 - BLANK: 100u" TIN/LEAD.
 - LF: 100u" MATTE TIN.
 - 0: WITH PICK-UP CAP + TAPE&REEL PACKAGE.
 - 1: WITHOUT PICK-UP CAP + TRAY PACKAGE.
 - 2: WITH PICK-UP CAP + TRAY PACKAGE.
- PIN COUNT.
- KEY TYPE:
0: NORMAL TYPE
- GOLD PLATING:
B: 10u" GOLD PLATE
E: 30u" GOLD PLATE

- 7. THIS PRODUCT (10053867-XXXXXL) MEETS THE EUROPEAN UNION DIRECTIVE AS DESCRIBED IN GS-22-008.
- 8. THIS PRODUCT (10053867-XXXXX) MEETS THE EUROPEAN UNION DIRECTIVE AS DESCRIBED IN GS-22-008 EXCEPT FOR Pb.
- 9. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, IR OR VAPER PHASE REFLOW OVEN.
- 10. THE PRODUCTS WHERE THE PART NUMBER ENDS IN 'LF' MEET THE CRITERIA SHOWN IN THE NOTES 7 AND 9.

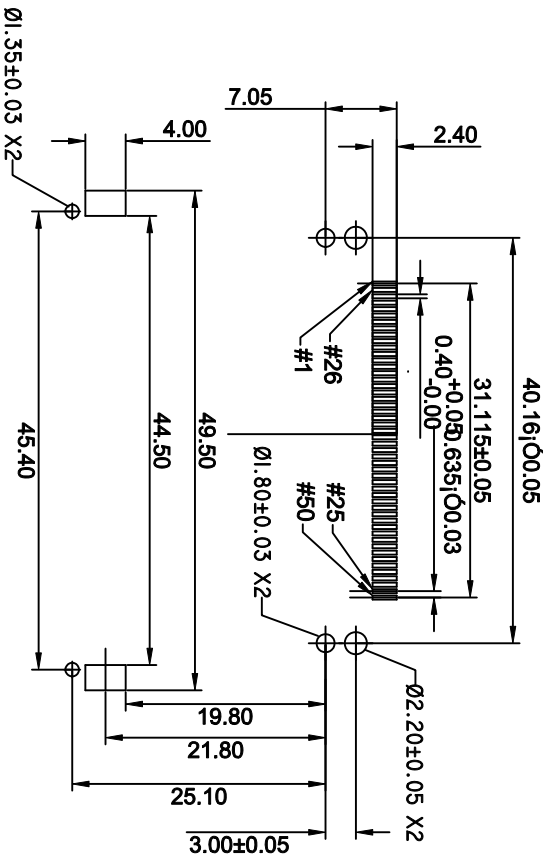

General Tolerance +/-0.05mm
Recommended PCB Pattern

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI		www.fciconnect.com	
ltr	ecm no	dr	date	linear	projection	title	product family	code	
A	105-0256	A.C.	11/21/05	.XX ± 0.30	MM	CF HEADER TYPE II NORMAL	CF	TWN	
B	106-0047	A.C.	3/07/06	.XXX ± 0.10	MM	S/O=0	CF	2 of 3	
C	108-1170	S.LIN	10/12/08	0° ± 2°	MM				
D	109-1048	S.LIN	04/09/09	dr	engr ALLEN CHANG 2/22/05				
				chr	STERLING LIN 2/22/05				
				appd	H.C LIU 2/22/05				
sheet	revision	D	D	D	scale	NA	A4	10053867	sheet
index	sheet	1	2	3					2 of 3

ACAP

code code

