

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVO
HM	00		A	OBS 5/4, EC 0502-0828-97	19MAY98	DD	EL
			B	REV ECD-08-007212	31MAR08	LH	BM

- 1

DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2


MATERIAL: HOUSING—POLYCARBONATE,CLEAR.
TERMINAL—0.36[.014] THICK PHOSPHOR BRONZE PLATED WITH 1.27μm[.000050] MINIMUM THICK GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH OVER THE REMAINDER, OVER 2.54μm[.000100] MINIMUM THICK NICKEL UNDERPLATE.
- 3

PLUG WILL ACCEPT 26 OR 28 AWG STRANDED WIRE HAVING A MAXIMUM INSULATION DIAMETER OF 0.99[.039] AND A MAXIMUM DIAMETER ROUND CABLE JACKET OF 2.79 [.110].
- 4


TERMINATED DIMENSION 6.15[.242] MAXIMUM.
- 5

1000 ASSEMBLIES PER PACKAGE.
- 6

100 ASSEMBLIES PER PACKAGE

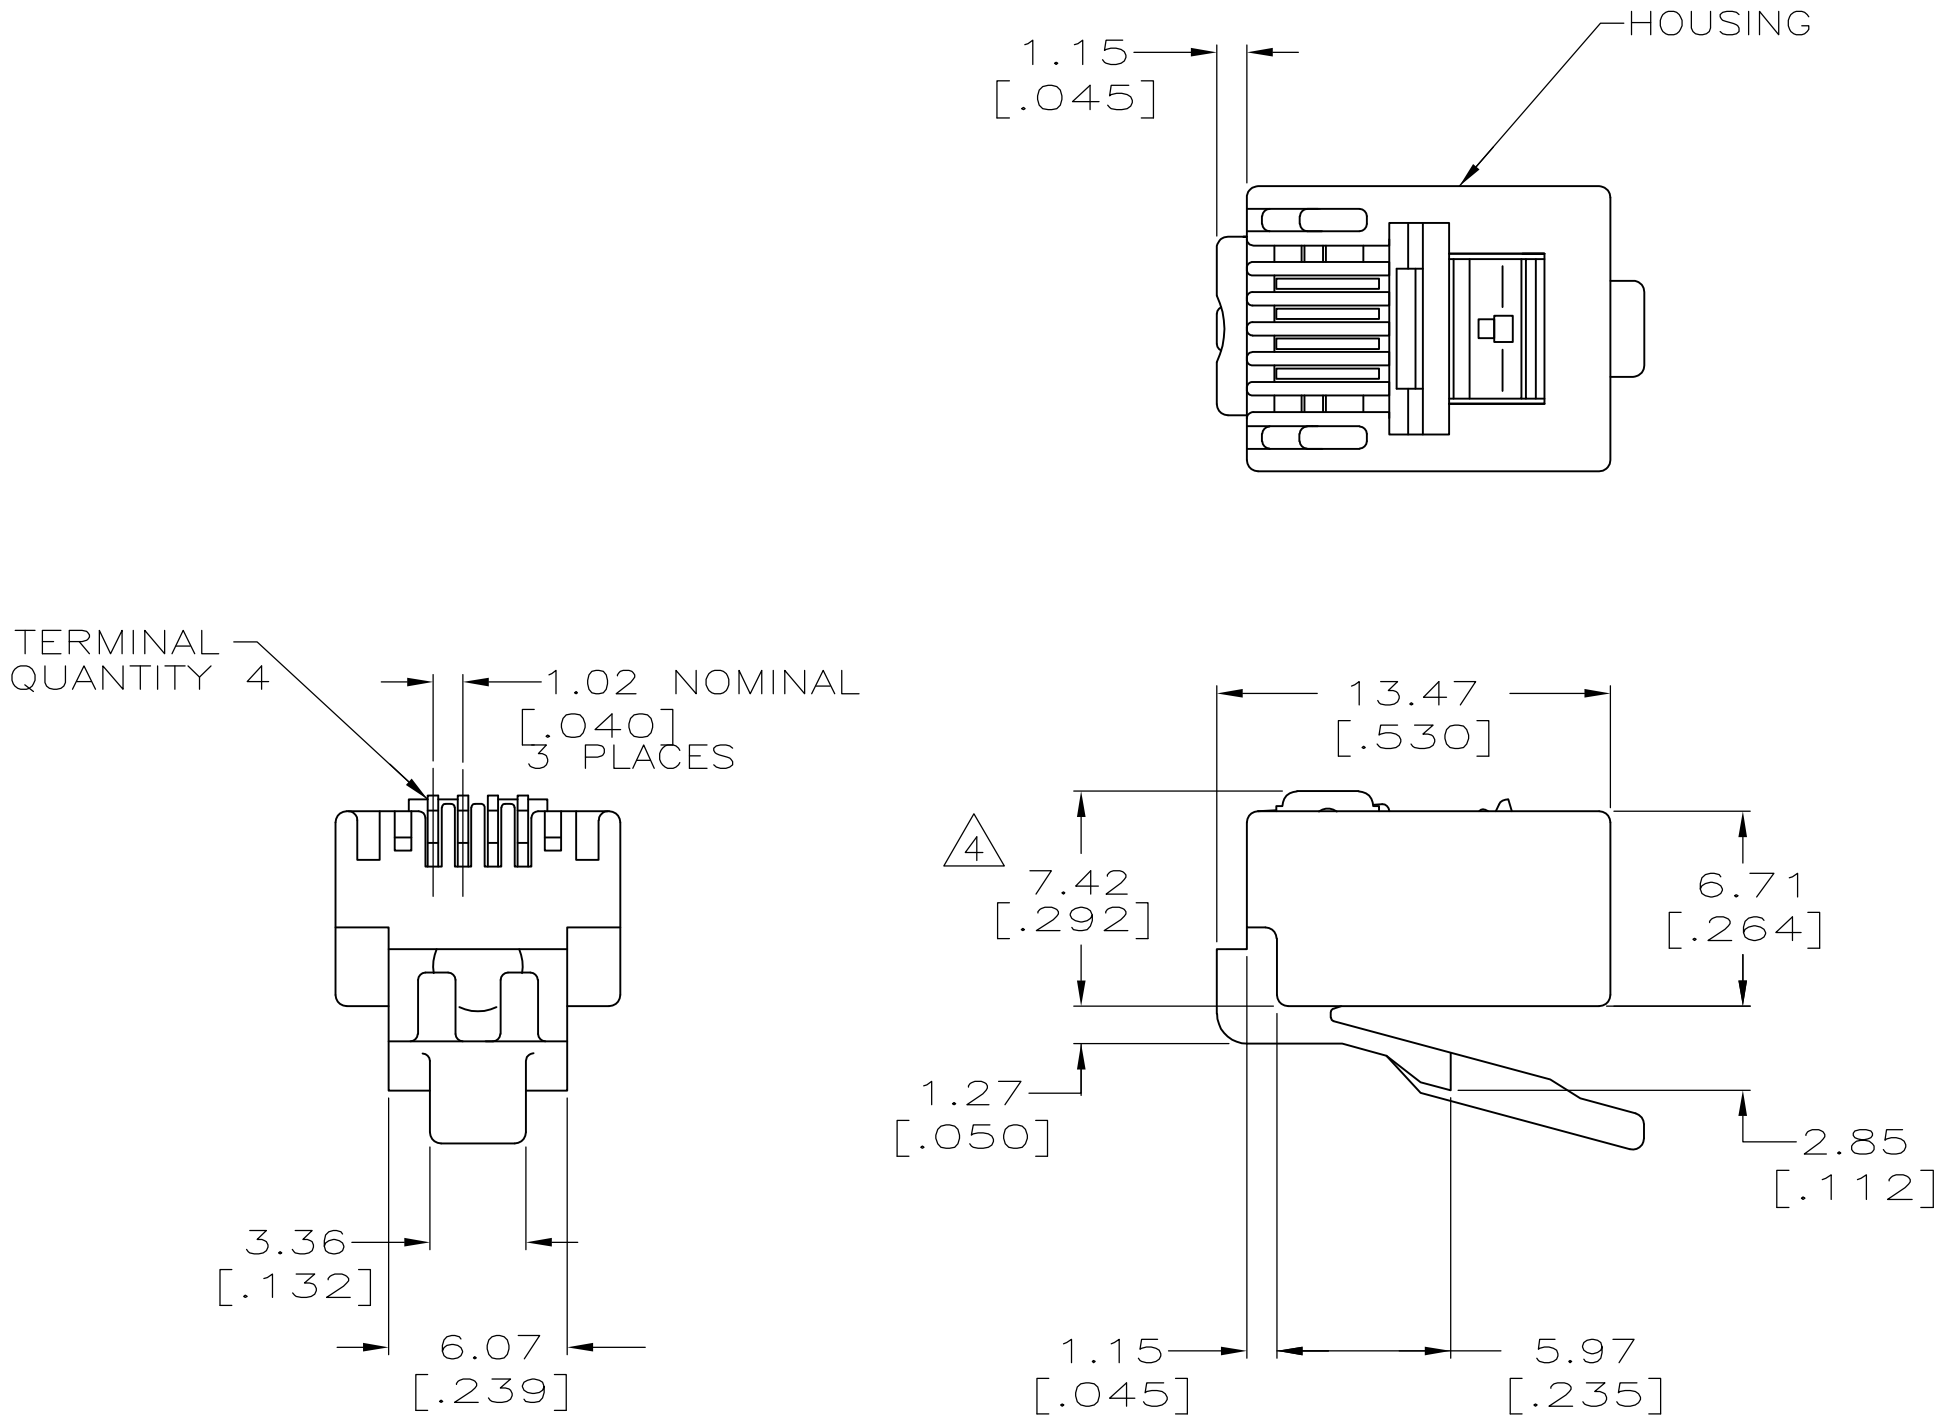

6	5-569031-3
5	5-569031-2
PACKAGED	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. STRAUSSER 1-11-95		 Tyco Electronics Corporation Harrisburg, PA 17105-3608							
		CHK D. HUSSEY 1-13-95									
DIMENSIONS: MM [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME MODULAR PLUG ASSEMBLY, 4 POSITION, ROUND CABLE, STRANDED WIRE							
		APVD —						PRODUCT SPEC 108-1163			
		—									
		0 PLC ± -		APPLICATION SPEC 114-6016							
		1 PLC ± -						SIZE A2			
		2 PLC ± -		CAGE CODE 00779							
		3 PLC ± -						DRAWING NO C=569031			
		4 PLC ± -		RESTRICTED TO —							
		ANGLES ± -						SCALE 4:1			
MATERIAL - 		FINISH  -		SHEET 1 of 1							
								REV B			