




CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect



PART MUST INSERT FULLY TO SURFACE A IN RECOMMENDED GRID  
.020 SQ.(10)  
[.50]

ALTERNATE MARKING DETAIL

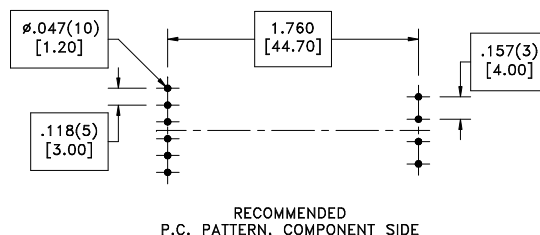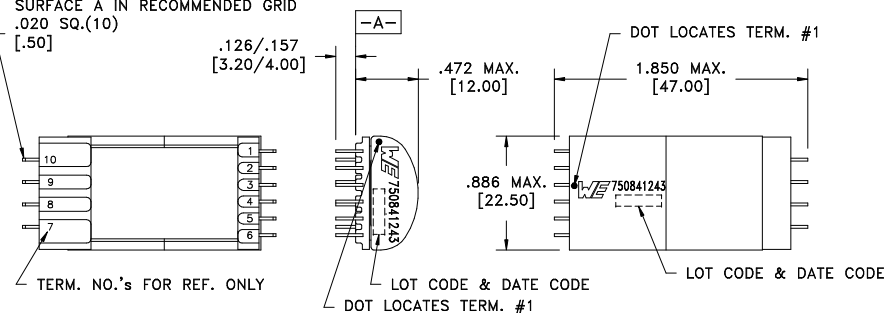

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	0.30 ohms max.
D.C. RESISTANCE	8-9 @20°C	0.09 ohms max.
D.C. RESISTANCE	6-5 @20°C	0.85 ohms max.
INDUCTANCE	1-3 10kHz, 0.1VAC, Ls	270uH ±10%
DIELECTRIC	1-9 tie(3+5), 3750VAC, 1 second	3000VAC, 1 minute
URNS RATIO	(1-3):(6-5)	3.82:1, ±3%
URNS RATIO	(1-3):(8-9)	1.91:1, ±3%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tray PKG-0327 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1°      Decimals: ±.005 [.13] Fractions: ±1/64      Footprint: ±.001 [.03]	DRAWING TITLE <b>TRANSFORMER</b>	PART NO. <b>750841243</b>
6A	8/11	SEE REVISION SHEET FOR REVISION LEVEL	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750841243	compliant RoHS SPECIFICATION SHEET 1 OF 1